PILING NOTES

1. PILES ARE TO BE CLASS B MODIFIED AND ALL PILES ARE TO BE 40 FT. IN LENGTH WITH A 8 INCH TIP AND 12" BUTT.
2. ALL PILES SHALL BE PRESSURE-TREATED ROUND TIMBER PILES CONFORMING TO ASTM D25.
2. DESIGN LOAD = 6 TONS PER PILE.
3. NO FIELD SUPERVISION OR INSPECTION PROVIDED UNDER THIS SEAL UNLESS OTHERWISE NOTED.
4. PILE LAYOUT MAY BE MODIFIED DUE TO ACTUAL DRIVING CONDITIONS. ENGINEER TO BE NOTIFIED ON ANY MODIFICATION.
6. A PILE BLOW COUNT LOG OF ALL PILES IS TO BE SUBMITTED TO THE ENGINEER OF RECORD. FAILURE TO SUBMIT SAID LOG WILL RELEASE THE ENGINEER OF ALL RESPONSIBILITY.
7. CONTRACTOR IS RESPONSIBLE FOR THE COMPARISON & VERIFICATION OF PILE LAYOUT DIMENSIONS WITH MOST RECENT ARCHITECTURAL DRAWINGS, ASSURING THAT PILES DO FALL WITHIN LIMITS OF THE DESIGN
8. USE DROP HAMMER OR SINGLE ACTING AIR HAMMER DELIVERING 7,500 FT-LBS OF ENERGY PER BLOW, RAM WEIGHT OF DROP HAMMER SHALL NOT EXCEED 2,500 TO 3,000 LBS AND THE DROP SHOULD NOT EXCEED 3 FT., AT MINIMUM OF 25 BLOWS PER FOOT. IF THE DROP EXCEEDS 3 FT., CONTACT ENGINEER FOR INSTRUCTIONS.
9. BRACE ALL PILINGS AS NEEDED FOR SWAYING.

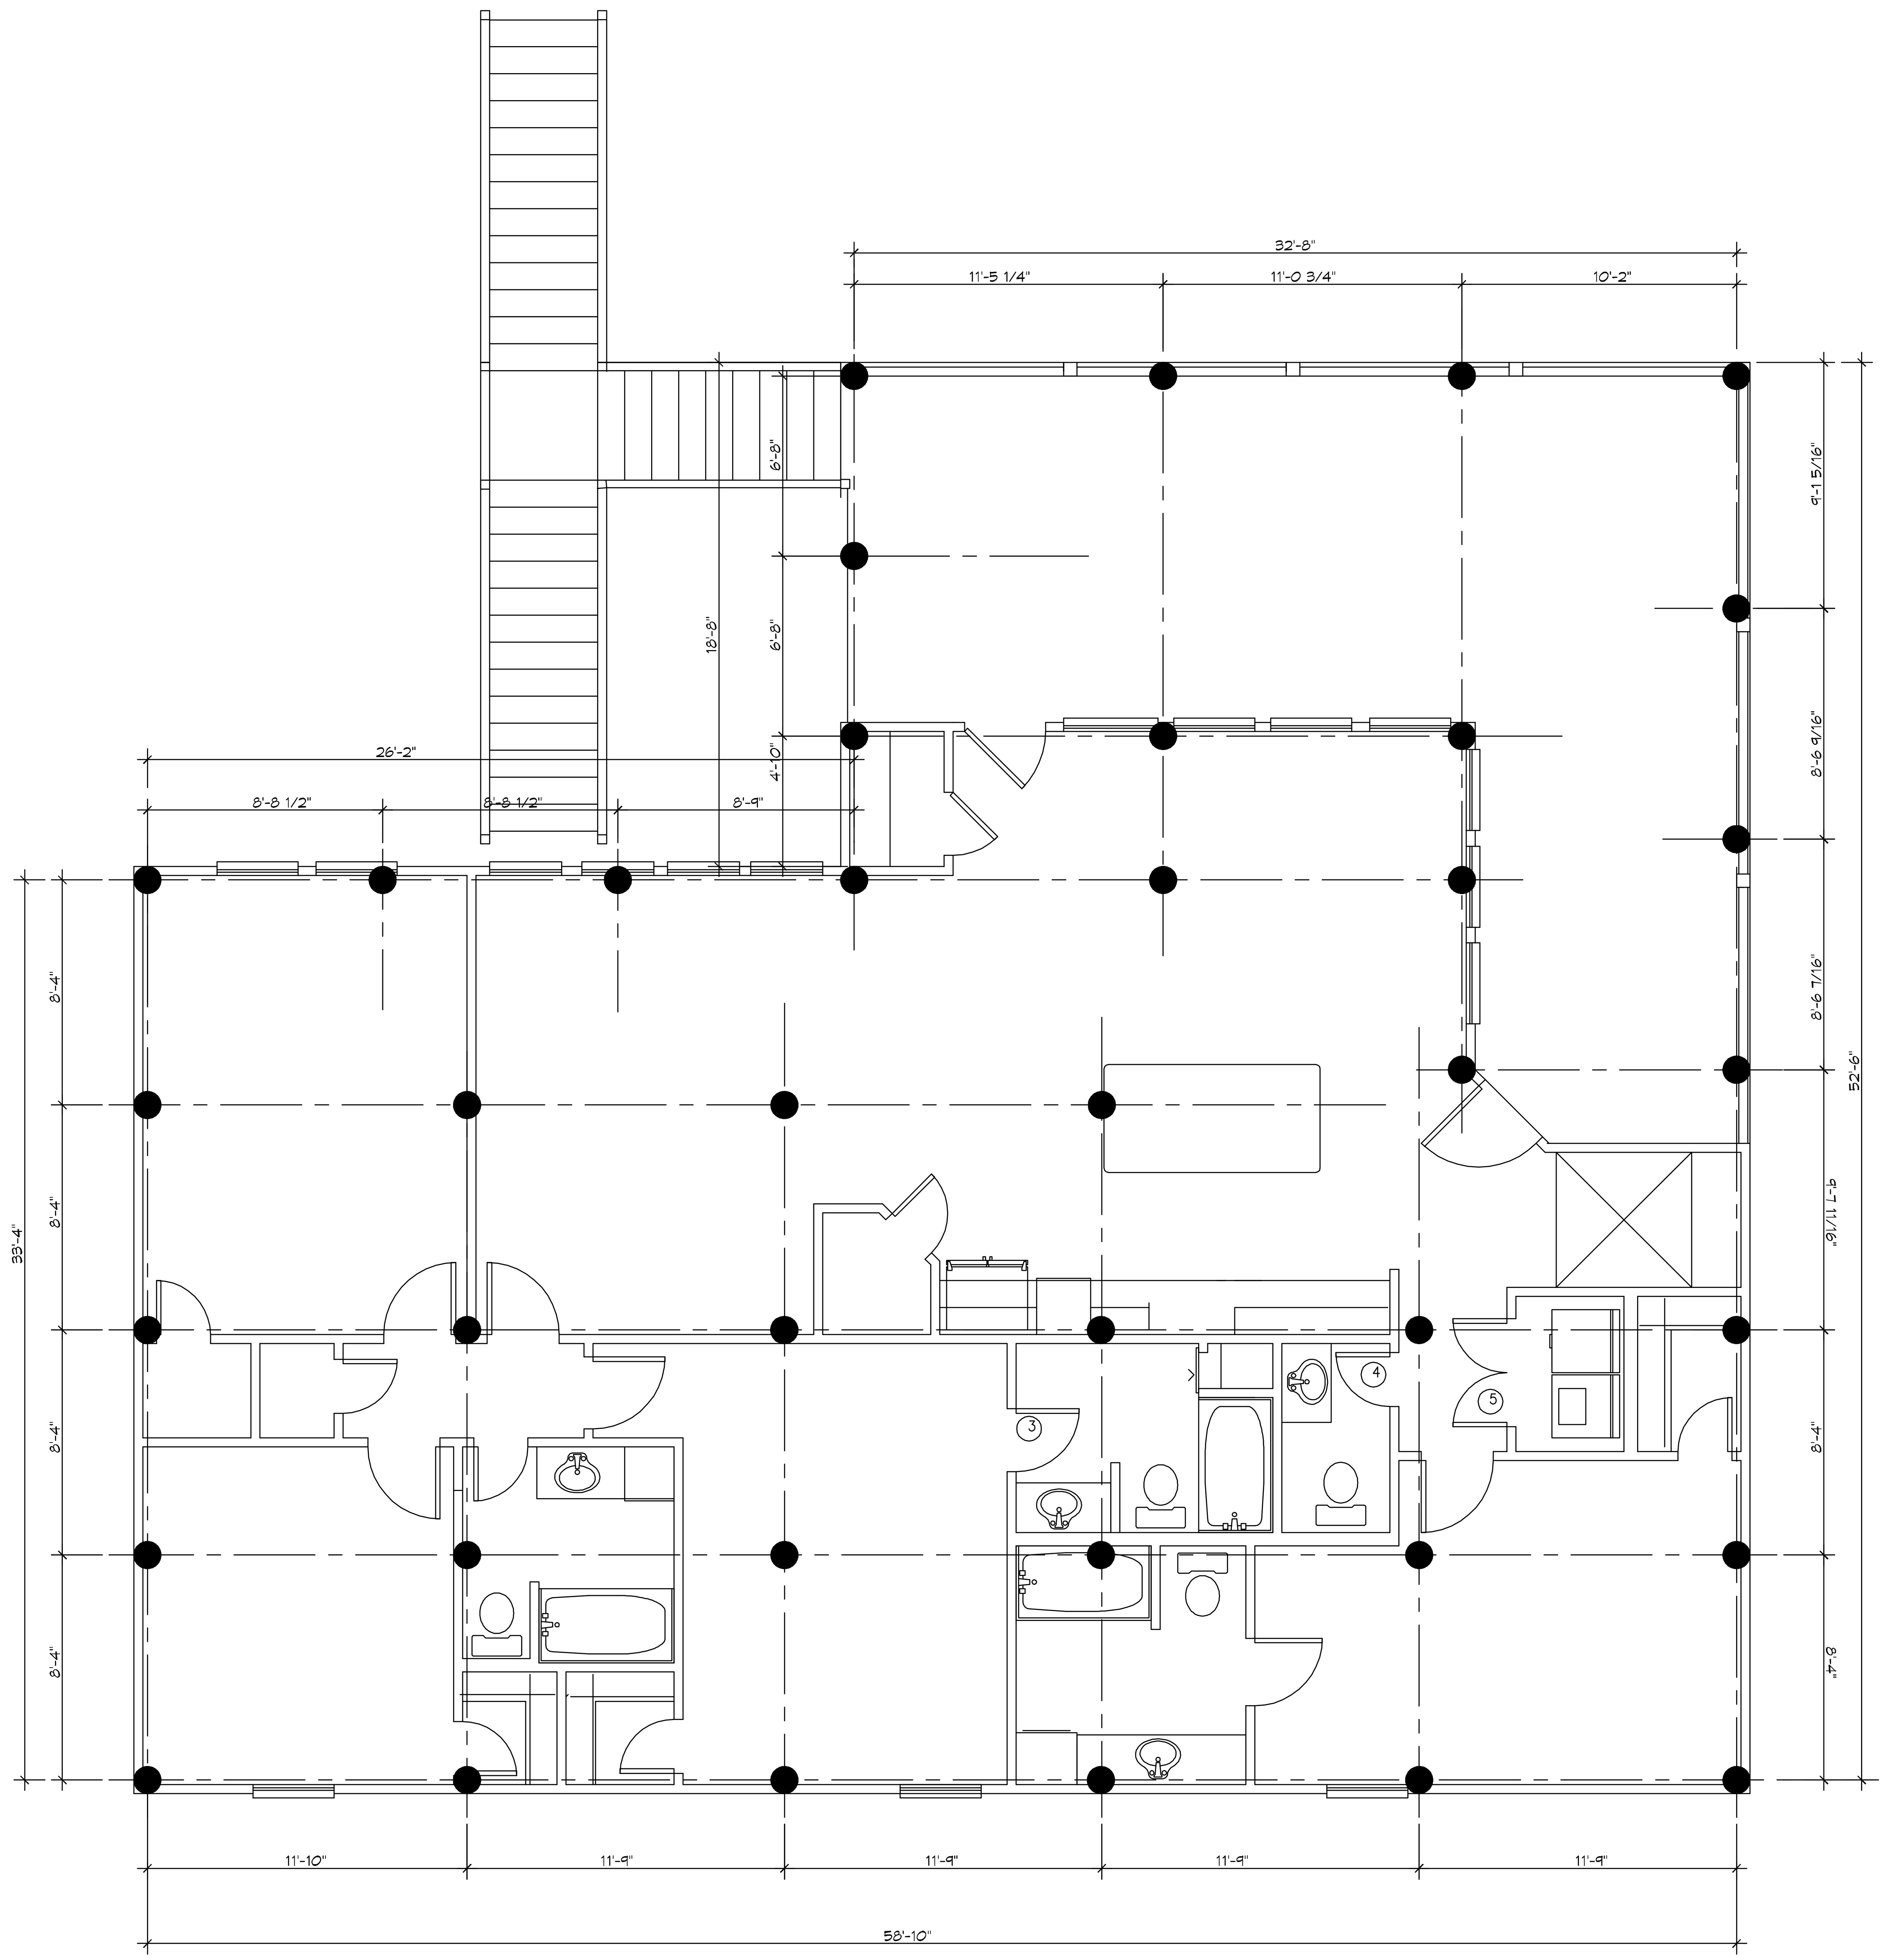

1 S101 S101 PILING PLAN

SCALE: 1/4" = 1'-0"

PILING PLAN

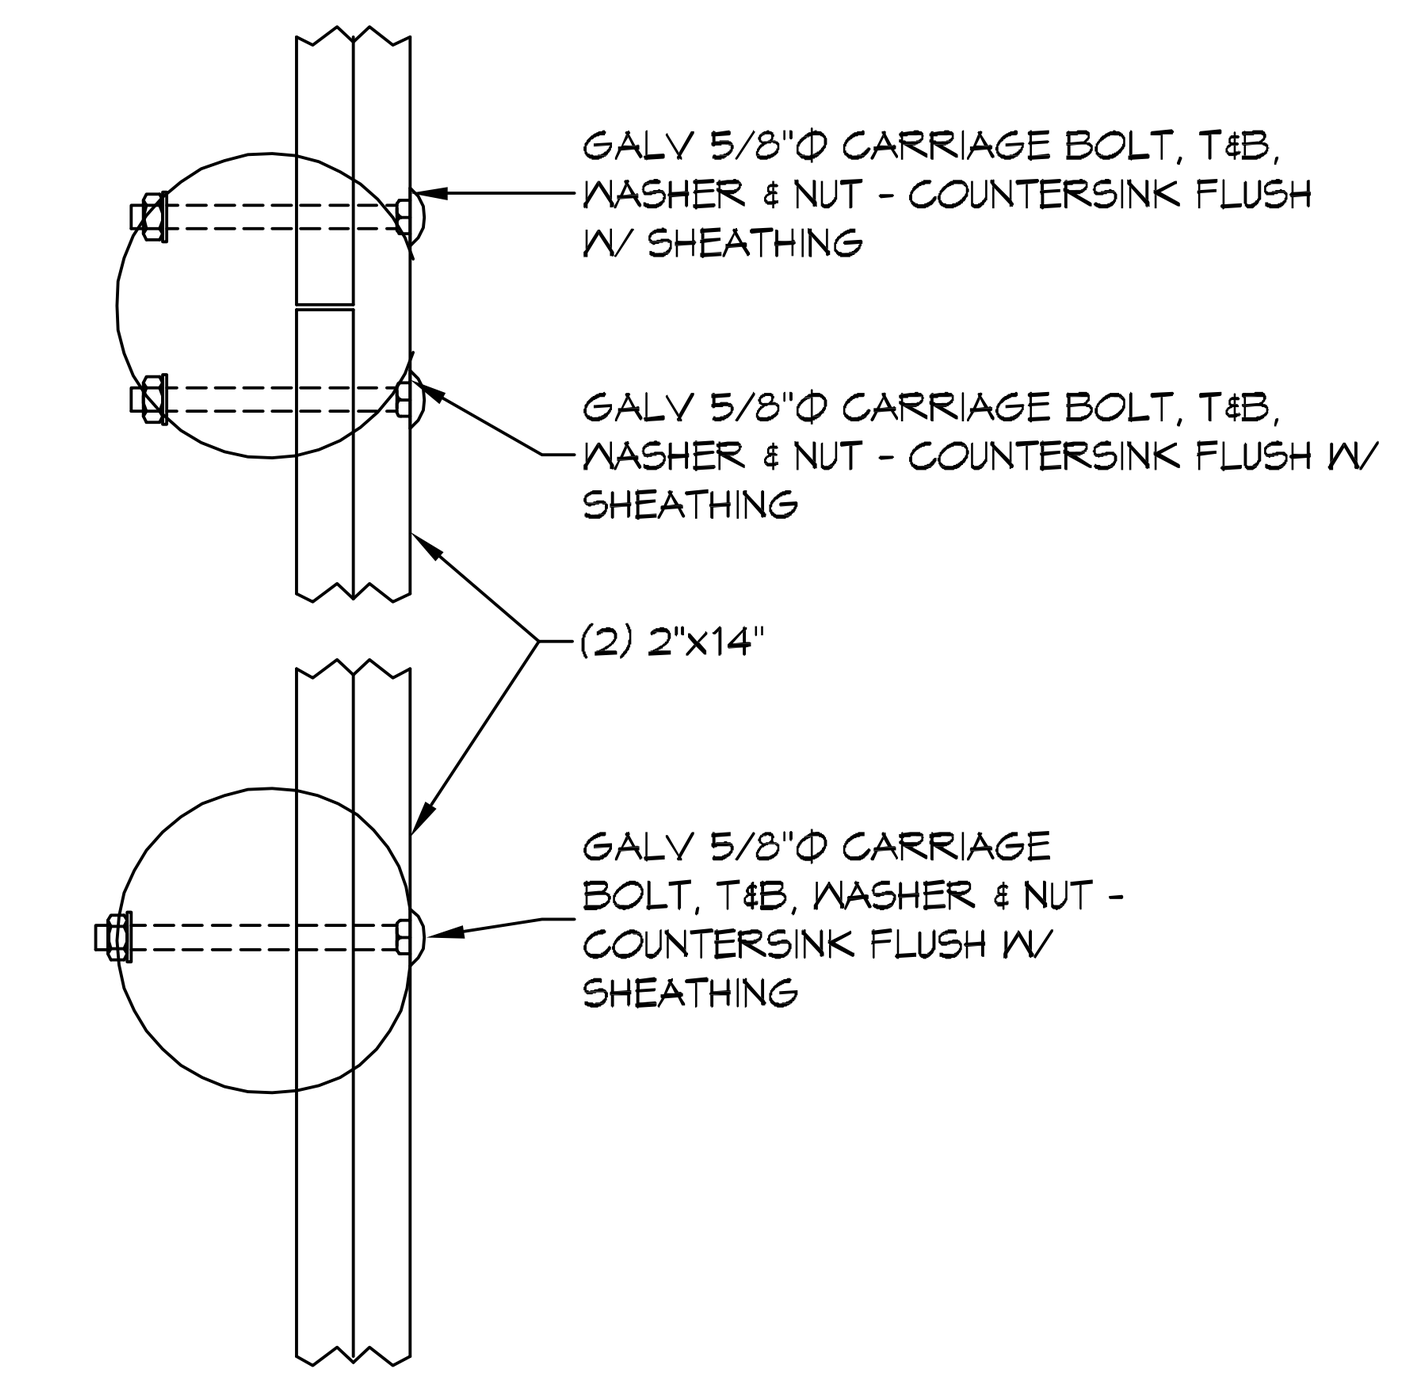

3 S101 S101 DETAIL

SCALE: 1/4" = 1'-0"

PERIMETER BAND

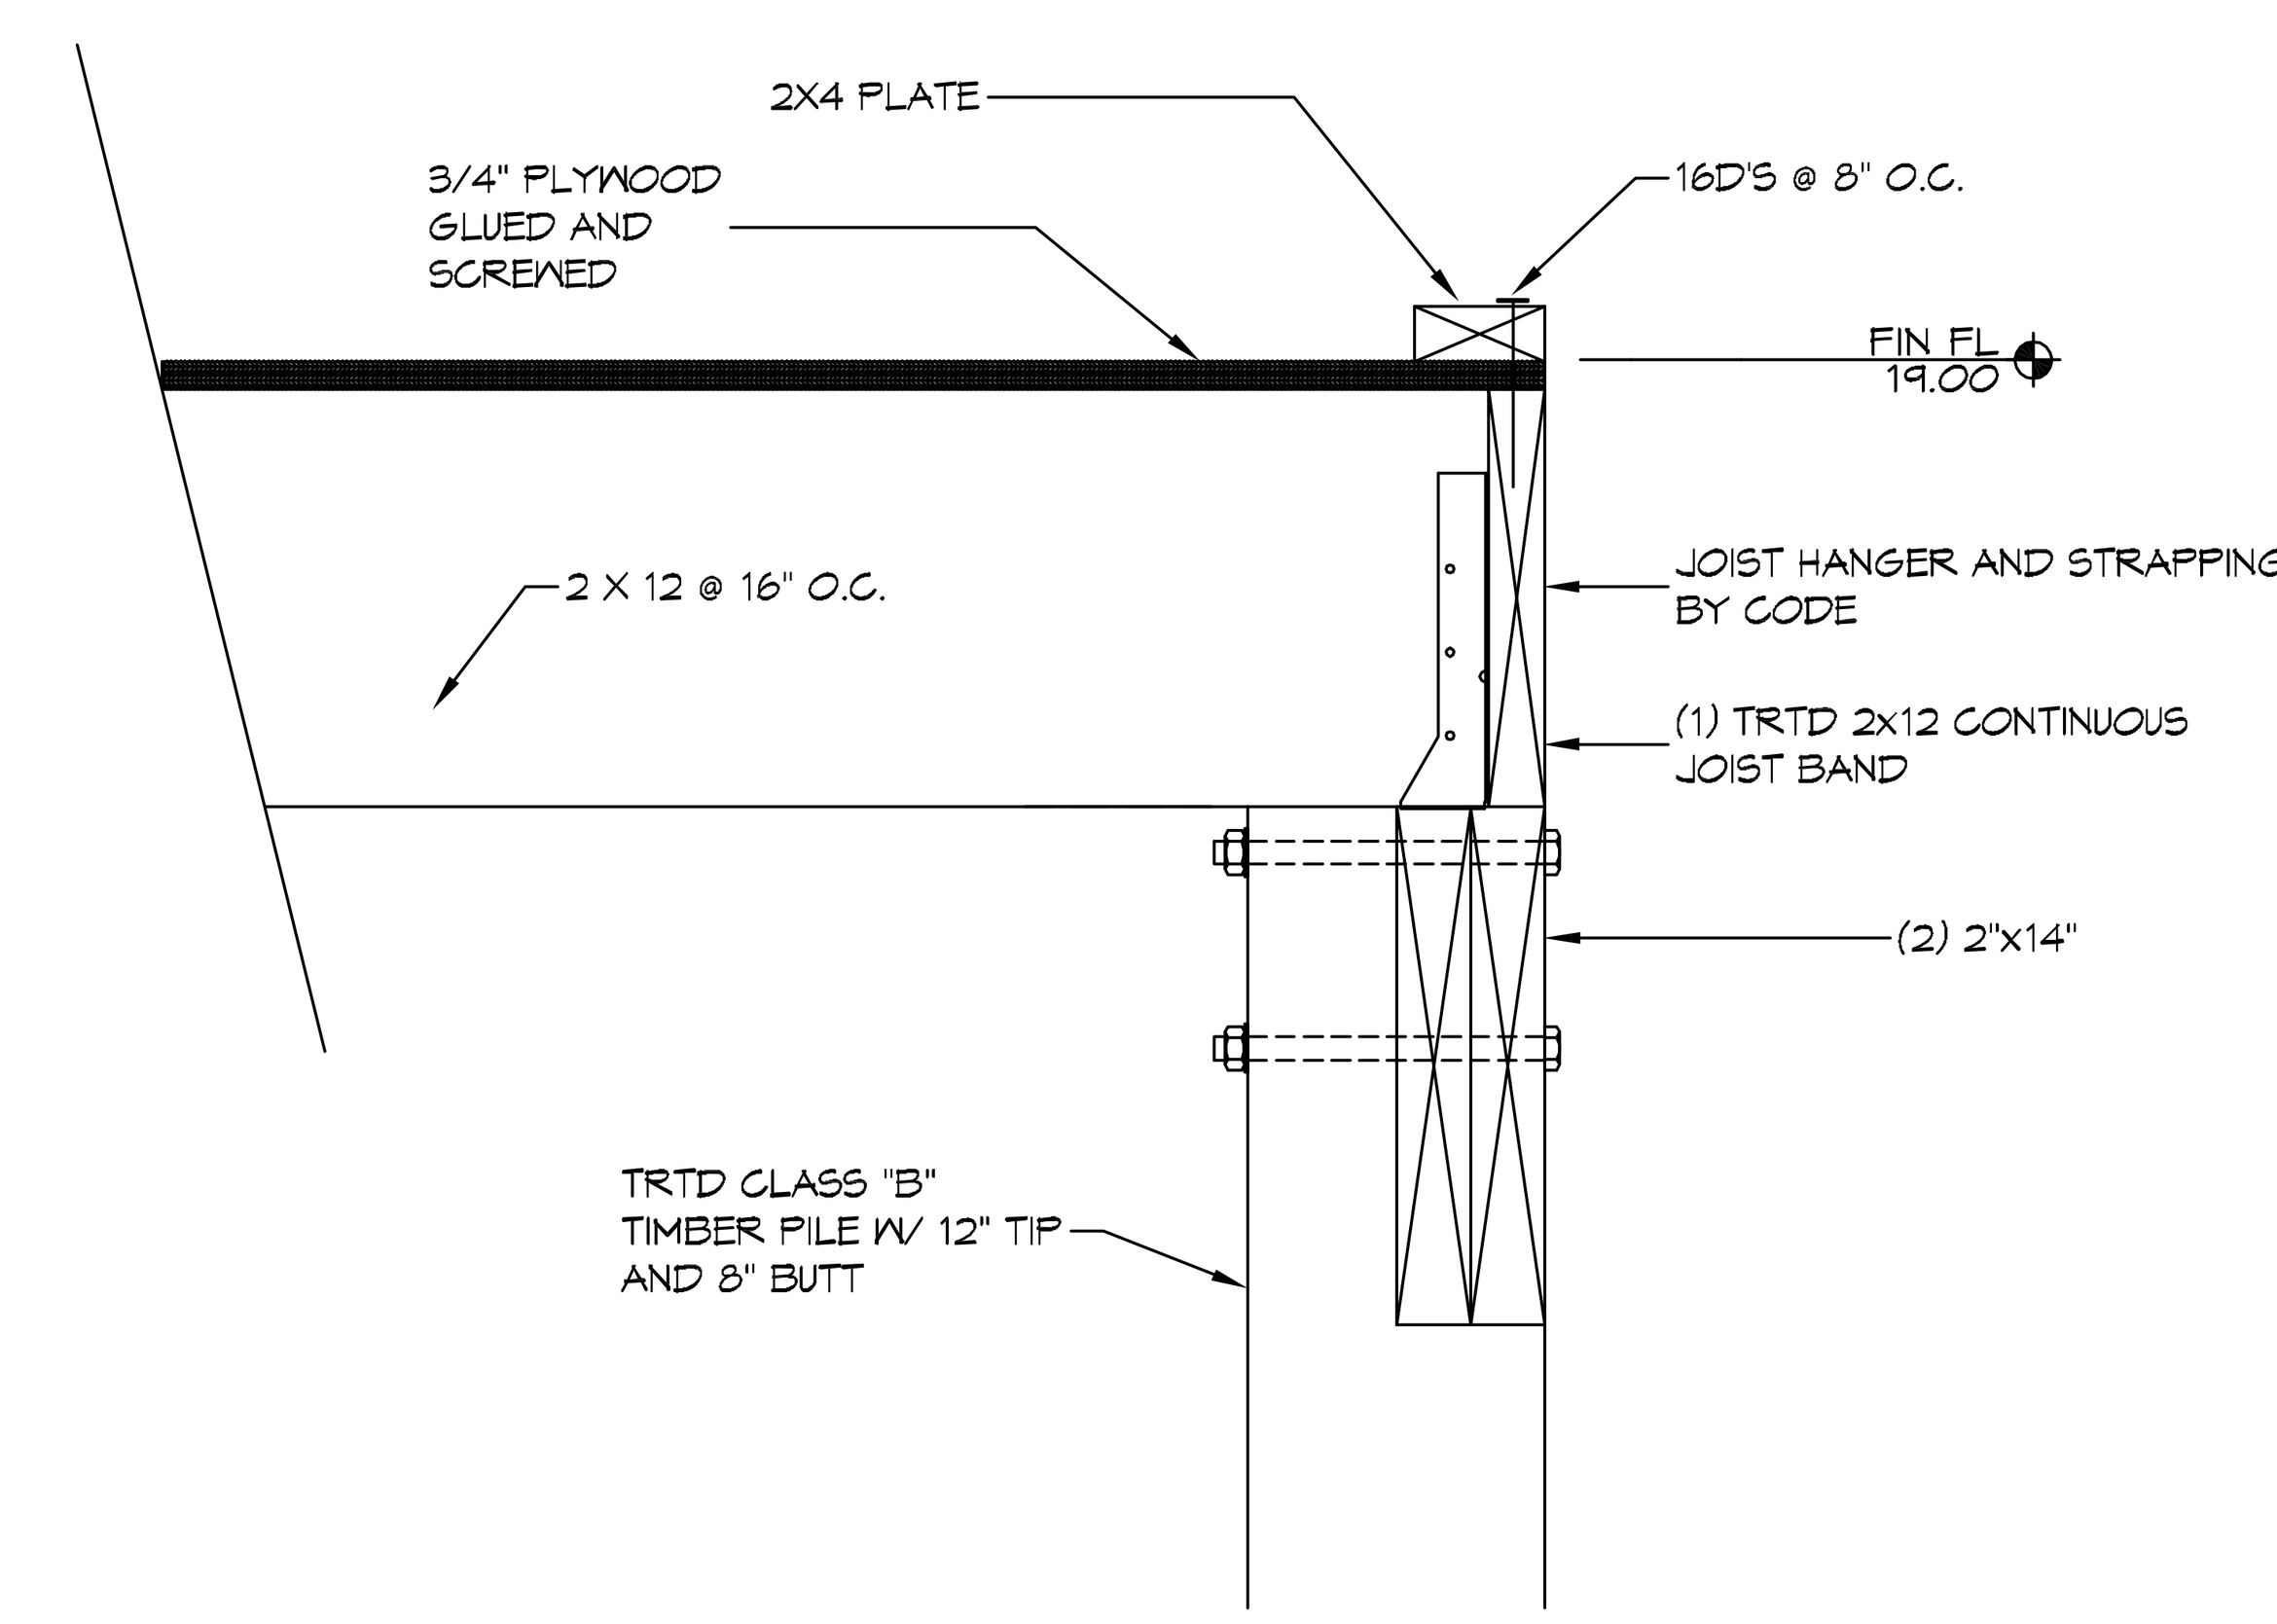

2 S101 S101 DETAIL

SCALE: 1/4" = 1'-0"

PERIMETER JOIST BAND

DAMMON ENGINEERING, INC.

554 Old Spanish Trail
Slidell, LA 70458
PH: 985.649.5832

www.dammonengineering.com
info@dammonengineering.com
Fax: 985.641.5950

#	DESCRIPTION	REVISIONS	DATE

SEAL:

STATE OF LOUISIANA
BRIAN A. MISTICH
License No. 30187
PROFESSIONAL ENGINEER

RALPH CAMPANILE

LOT 20, HWY 190
SLIDELL, LOUISIANA 70458

JOB No:	2251	DATE:	03-01-17
DRAWN BY:	CKD	CHECKED BY:	BAM

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

SHEET TITLE:
PILING
PLAN

DRAWING NUMBER:

S101

SHEET No: 1 of # 2

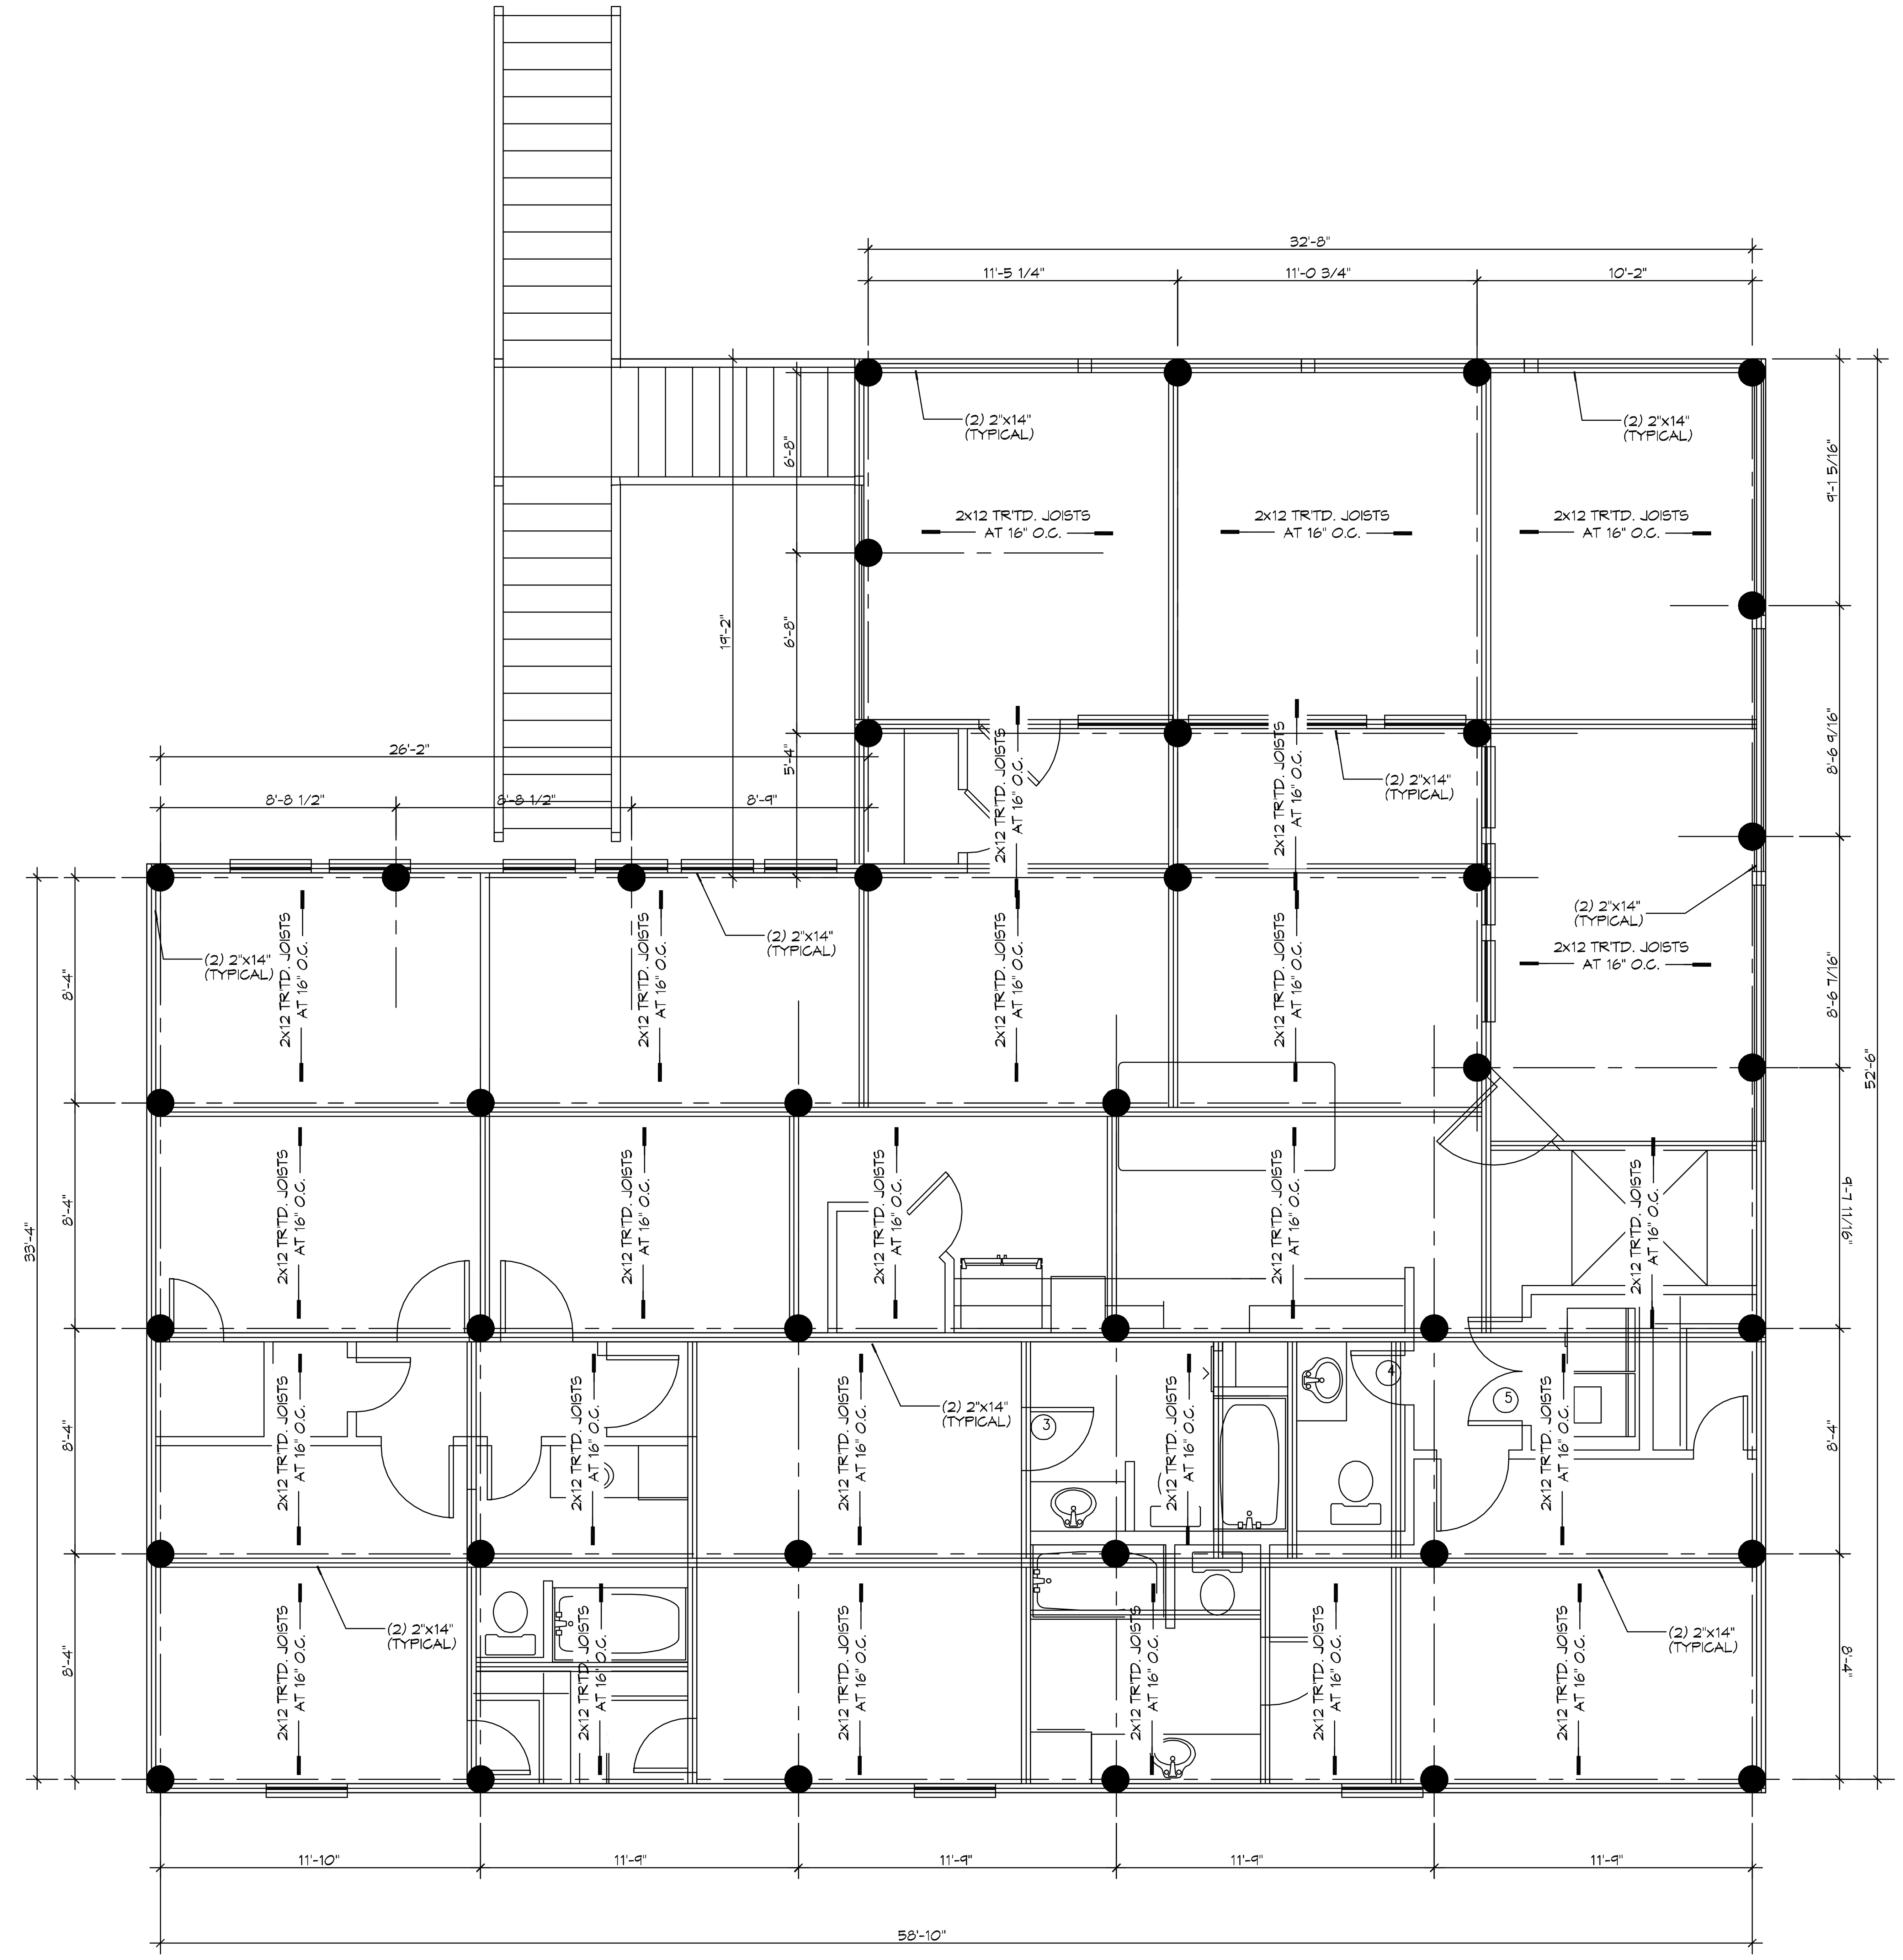

1 S102 S102 FRAMING PLAN

SCALE: 1/4" = 1'-0"

FRAMING PLAN

GENERAL STRUCTURAL NOTES

1. THE STRUCTURE IS DESIGNED TO BE SELF-SUPPORTING & STABLE AFTER THE BUILDING IS FULLY COMPLETED. IT IS SOLELY THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES & SEQUENCE & TO INSURE THE SAFETY OF THE BUILDING AND IT'S COMPONENT PARTS DURING ERECTION. THIS INCLUDES THE ADDITION OF WHATEVER SHORING, SHEETING, TEMPORARY BRACING, BUYS OR TIEDOWNS WHICH MIGHT BE NECESSARY DURING CONSTRUCTION.
2. IT IS SOLELY THE CONTRACTOR'S RESPONSIBILITY TO FOLLOW ALL APPLICABLE SAFETY CODES & REGULATIONS DURING ALL PHASES OF CONSTRUCTION.
3. GOVERNING CODES: INTERNATIONAL RESIDENTIAL CODE 2012 AND ASCE STANDARD 7-10.
4. UNLESS OTHERWISE SPECIFICALLY SHOWN DESIGN, FABRICATION AND ERECTION SHALL BE GOVERNED BY THE LATEST REVISIONS OF :
   - 4.1. NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION BY NFPA.
   - 4.2. U.S. PRODUCT STANDARD PS-1 FOR CONSTRUCTION AND INDUSTRIAL PLYWOOD.
   - 4.3. APA DESIGN/CONSTRUCTION GUIDE - RESIDENTIAL AND COMMERCIAL.
6. MISCELLANEOUS:
   - 6.1 USE ONE LINE OF SOLID BLOCKING OR CROSS BRIDGING AT 4'-0" O.C. MAXIMUM, FOR ALL JOIST AND RAFTERS. USE SOLID BLOCKING AT BEARINGS.
   - 6.2 USE DOUBLE STUDS UNDER BEAM AND LINTEL BEARING, UNLESS SHOWN OTHERWISE.
   - 6.3 PLYWOOD SUBFLOORING SHALL BE 3/4" THICK TONGUE AND GROOVE STURDYFLOOR. APPLY CONTINUOUS BEAD OF GLUE ON JOISTS AND GROOVE OF TONGUE-AND-GROOVE PANELS. ATTACH SUBFLOORING TO JOIST USING SCREWS.
   - 6.4 BEFORE APPLYING FINISH FLOORING, SET SCREWS ⅛" BUT DO NOT FILL. LIGHTLY SAND ANY SURFACE ROUGHNESS, PARTICULARLY AT JOINTS AND AROUND WALLS.
   - 6.10 COORDINATE FRAMING WITH HVAC, ELECTRICAL AND PLUMBING REQUIREMENTS.
   - 6.11 BORED HOLES SHALL BE 2" CLEAR FROM TOP OR BOTTOM EDGE OF JOIST, NOT LARGER THAN 1-1/4" AND NOT IN MIDDLE OF SPAN.
   - 6.12 STRAP ALL PLATES CUT AWAY FOR PLUMBING WITH 1-1/2" WIDE NO. 24 GAUGE GALVANIZED STRAPS 18" LONG, BOTH SIDES OF WALL-SPIKED TO PLATES.
   - 6.13 PROVIDE STUD POSTS MADE UP OF MULTIPLE STUDS BENEATH END BEARING OF BEAM SHOWN ON FRAMING PLAN. NAIL EACH STUD TO ADJACENT STUD IN THE POST WITH 16d NAILS AT 12" O.C. (ON STUD CENTERLINE) AND WITHIN 3" OF EACH END. CUT STUDS CAREFULLY TO INSURE FULL AND COMPLETE BEARING TOP AND BOTTOM.
   - 6.14 STAIR STRINGERS SHALL BE 2x12. INSTALL INTERMEDIATE STRINGER FOR STAIRS OVER 30" WIDE.
   - 6.16 DOUBLE UP ON FLOOR JOISTS UNDER ALL WALLS.

FOUNDATION & STRUCTURAL DIMENSION LUMBER NOTES

1. PROVIDE STRUCTURAL FRAMING MEMBERS OF THE SIZES INDICATED ON THESE DRAWINGS, UNLESS INSTRUCTED OTHERWISE. USE PRESSURE TREATED SOUTHERN PINE NO. 2 MINIMUM FOR ALL BEAMS, FLOOR JOIST AND BOTTOM SILL PLATES.
   - 1.1 BEAMS SHALL BE PRESSURE TREATED CONFORMING TO AWPA UC3B USING A WATER BASED TREATMENT. ALL BEAMS SHALL BE GLUED AND NAILED.
2. USE SOUTHERN PINE NO. 2 MINIMUM FOR ALL REMAINING STRUCTURAL MEMBERS.

DAMMON ENGINEERING, INC.
554 Old Spanish Trail
Slidell, LA 70458
PH: 985.649.5832
www.dammonengineering.com
info@dammonengineering.com
Fax: 985.641.5950

#	DESCRIPTION	DATE
REVISIONS		

SEAL:

R A L P H
C A M P A N I L E

LOT 20, HWY 190
SLIDELL, LOUISIANA 70458

JOB No:	2251	DATE:	03-01-17
DRAWN BY:	CKD	CHECKED BY:	BAM

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

SHEET TITLE:
FRAMING
PLAN

DRAWING NUMBER:

S102