

FLOOR PLAN
SCALE: 3/16" = 1'-0"

DOOR & HARDWARE SCHEDULE

MARK	SIZE	DOOR TYPE	FRAME	HDPR. NO.	STC	REMARKS
EXTERIOR DOORS						
1	PR. 30x7/10	STORE FRONT	MATCH DOOR	1	NA	CUSTOM UNIT PROVIDE 16" TRANSOM SEE ELEVATIONS
2	14/6x14/10	ROLL-UP MTL. DR.	GALV. PTD. HOL. MET.	NA	NA	GALVANIZING TO BE 690
3	30x7/10	FLUSH GALV. HOL. MET. STEEL INSUL.	GALV. PTD. HOL. MET.	1	NA	GALVANIZING TO BE 690
INTERIOR DOORS						
4	30x7/10	FLUSH SOLID CORE WD.	PTD. HOL. MET.	2	NA	STAIN SELECT BY OWNER
5	30x7/10	FLUSH SOLID CORE WD.	PTD. HOL. MET.	3	NA	STAIN SELECT BY OWNER
6	30x7/10	FLUSH SOLID CORE WD.	PTD. HOL. MET.	4	NA	STAIN SELECT BY OWNER
7	30x7/10	FLUSH GALV. HOL. MET. STEEL INSUL.	PTD. HOL. MET.	5	NA	45 MIN. RATED

DOOR HARDWARE SCHEDULE:
 1. AUTO CLOSER, PANIC BAR, AIR RESISTANT METAL THRESHOLD, WEATHERSTRIP, DOOR STOP, EXTERIOR CHUNDER LOCK, BALL BEARING US32D HINGES.
 2. PASSAGE LOCK, DOOR STOP, US26D HINGES.
 3. KEYPAD HANDLE, DOOR STOP, US26D HINGES.
 4. AUTO CLOSER, DOOR STOP, PRIVACY LOCK, BALL BEARING US26D HINGES.
 5. KEYPAD HANDLE, AUTO CLOSER, DOOR STOP, US26D HINGES.

WINDOW SCHEDULE

MARK	SIZE	WINDOW TYPE	FRAME	GLASS	LITES	REMARKS
A	NOM. 30x6/10	HOL. MET. FIXED	HOL. MET.	LOW E	SEE SEE ELEVATIONS	

WINDOW SCHEDULE NOTES:
 1. GLAZING TO BE 3/8" THK. LAMINATED LOW E.


FINISH SCHEDULE

ROOM NUMBER	ROOM NAME	WALLS	FLOOR	WALL BASE	CLG	COMMENTS
100	LOBBY	5/8" GYP. PTD.	CARPET**	6" WD.	CT	
101	OFFICE 1	5/8" GYP. PTD.	CARPET	6" WD.	CT	
102	I.T.	5/8" GYP. PTD.	CARPET	6" WD.	CT	
103	KITCHEN	5/8" GYP. PTD.	VCT	4" RB.	CT	
104	OFFICE 9	5/8" GYP. PTD.	VCT	4" RB.	CT	
105	OFFICE 8	5/8" GYP. PTD.	CARPET	6" WD.	CT	
106	OFFICE 7	5/8" GYP. PTD.	CARPET	6" WD.	CT	
107	WOMEN	5/8" GYP. PTD.	CERAMIC CERAMIC	4" UP	GWB	
108	MEN	5/8" GYP. PTD.	CERAMIC CERAMIC	4" UP	GWB	
109	OFFICE 6	5/8" GYP. PTD.	CARPET	6" WD.	CT	
110	OFFICE 5	5/8" GYP. PTD.	CARPET	6" WD.	CT	
111	OFFICE 4	5/8" GYP. PTD.	CARPET	6" WD.	CT	
112	OFFICE 3	5/8" GYP. PTD.	CARPET	6" WD.	CT	
113	OFFICE 2	5/8" GYP. PTD.	CARPET	6" WD.	CT	
114	UNISEX	5/8" GYP. PTD.	NON-FINISH CONCRETE	4" RB.	GWB	
115	STORAGE	NON-FINISH CONCRETE	N/A	OPEN	CT	
116	CLOSET	5/8" GYP. PTD.	CARPET	6" WD.	CT	
	CORRIDOR	5/8" GYP. PTD.	CARPET	6" WD.	CT	

LEGEND:
 GYP: GYPSUM WALL BOARD
 CT: CEILING TILE, 2x4"
 RB: RUBBER BASE 4" HIGH
 WB: WOOD BASE
 VCT: VINYL COMPOSITION TILE

AREA BY USE:
 TOTAL AREA: 9,000 SQ. FT.
 OFFICE AREA: 2,700 SQ. FT. (2,319 NET)
 WAREHOUSE AREA: 6,300 SQ. FT. (6,040 NET)

PLUMBING FIXTURE COUNT:
 OFFICE: BASED ON AMOUNT OF OFFICES AVAILABLE
 LESS THAN 15 OCCUPANTS = 1 MALE WC AND LAV, 1 FEMALE WC AND LAV
 WAREHOUSE: 6300 SF. OCCUPANT LOAD BY SHIFT SUBSTITUTED BY OWNER
 LESS THAN 5 OCCUPANTS = 1 UNISEX WC AND LAV
 TOTAL: 1 MALE WC AND LAV, 1 FEMALE WC AND LAV, 1 UNISEX WC AND LAV

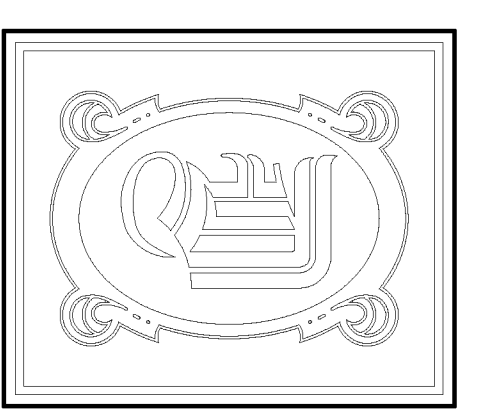

DAMMON ENGINEERING, INC.
 CHIEF ENGINEER
 EMMETT DAMMON, P.E.
 CHIEF ARCHITECT
 ROBERT WILTSE

554 OLD SPANISH TRAIL
 SLIDELL, LA. 70458
 OFFICE: 985-649-5832
 FAX: 985-641-5950

WWW.DAMMONENGINEERING.COM
 EMAIL: DAMMONENG@BELL-SOUTH.NET

ARCHITECTURE
 ENGINEERING
 STUDIES
 PLANNING
 INVESTIGATION
 EXPERT WITNESS

NEW OFFICE WAREHOUSE
 BINGO SUPPLY
 9000 SQ. FT.
 OFFICE / WAREHOUSE
 SLIDELL, LA

FLOOR PLAN

REV:
 SCALE: AS NOTED
 JOB#: 2113
 DATE: 6-06-11
 SHEET 9