

GE Profile™ 30" Smart Free-Standing Electric Double Oven Convection Range with No Preheat Air Fry

Model #: PB965BPTS ★★★★★ 4.6 (153)

\$1,849.00

- No Preheat Air Fry
 - Built-in WiFi
 - Fingerprint resistant stainless
 - Dimensions: 47 H x 29 7/8 W x 28 1/4 D
- [Learn More >](#)

Color: Black Stainless




[FIND STORES](#)



- [About This Product](#)
- [Related Products](#)
- [Specs & Details](#)
- [Reviews](#)
- [Q&A](#)
- [Owner Support](#)


ABOUT THIS PRODUCT

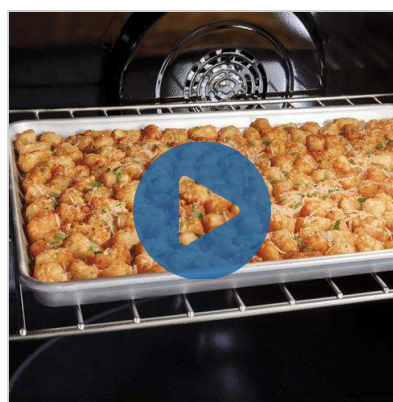

No Preheat Air Fry

Cook healthier, crispier versions of your favorite foods in less time, thanks to an air fryer right in your oven that doesn't require preheating, a basket or a special tray

[Play Video](#)

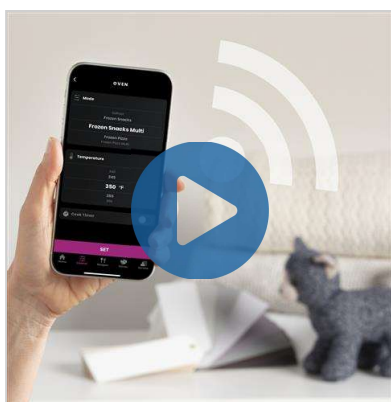

Built-in WiFi

This smart oven features built-in WiFi so you can control oven functions with the SmartHQ app on your smart device

[Play Video](#)



Fingerprint resistant stainless


Easily wipe away smudges and fingerprints for a look that's always sparkling clean



12"/ 9"/6" Power boil element

A power boiler produces concentrated heat for rapid boiling in a flexible 12-inch/9-inch/6-inch burner size, so you spend less time waiting and more time cooking


[Play Video](#)

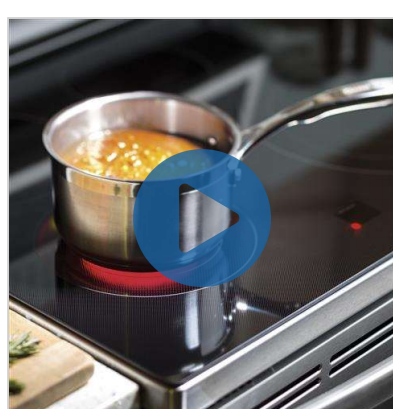

8"/5" Dual element

A dual burner cooktop lets you choose between 8-inch and 5-inch electric elements for a more convenient cooking experience


[Play Video](#)

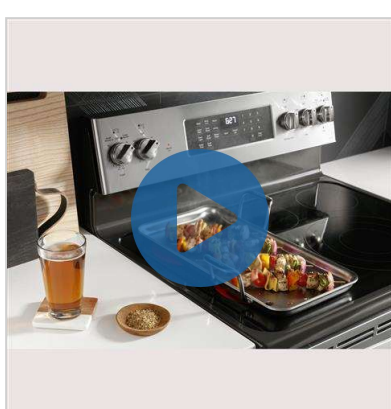

Griddle zones

Create the perfect place for a griddle, grill or other large cookware with two burners that work together to create an evenly heated griddle zone right on the cooktop

[Play Video](#)

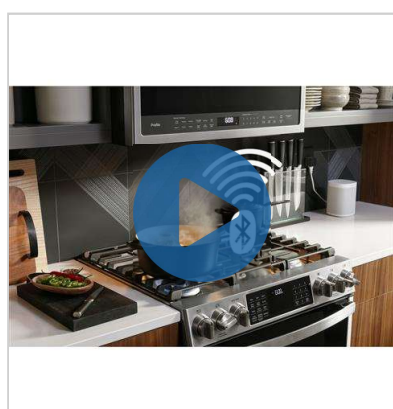

Synchronized clocks and lights

Synchronize your oven and GE Appliances over-the-range microwave so that clocks are always matching and lights automatically come on when a burner is activated with Chef Connect

[Play Video](#)




Fast preheat

Preheat the oven quickly and cut down on preheat time with a speedy preheat feature



Fifth element warming zone

A convenient low-heat warming zone provides even temperature control for foods on the cooktop

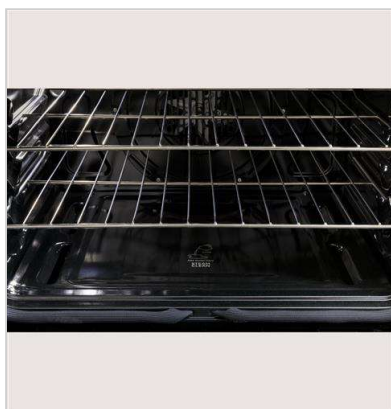

Self-clean with steam clean

This self-cleaning oven uses optional steam cleaning for light soils to clean the oven cavity with less heat and odor



Hidden baking element

This oven features a hidden baking element that gets rid of hard-to-reach areas and makes cleanup easier



Black gloss oven interior

A clean and sleek interior that is attractive and easy to maintain

True Convection with Precise Air

This oven features True Convection, an advanced convection system that uses a third heating element and reversing fan for the highest level of heat and air circulation

Large capacity double oven

Cook an entire meal at once with a 6.6 cubic foot total capacity double oven which provides enough room for multiple dishes

CLAIMS & CERTIFICATIONS



For California Residents:
California Prop 65



MADE IN AMERICA: 70 to 90% U.S. Content

BUILT-IN WIFI, POWERED BY SmartHQ™



Connect to WiFi for real-time feedback, optimized performance, alerts and more.

Works With



IFTTT SONOS



COMPLETE THE LOOK



GE Profile™ 2.2 Cu. Ft. Countertop Sensor...



GE Profile™ 2.1 Cu. Ft. Over-the-Range Sensor...



GE Profile™ 1.7 Cu. Ft. Convection Over-the...




GE Profile™ Opal™ 2.0 Nugget Ice Maker with...



GE Profile™ Opal™ 2.0 Nugget Ice Maker

Model #: PES7227BLTS	Model #: PVM9005BLTS	GE Profile™ 30" Smart Free-Standing Electric Double Oven Convection Range with No Preheat Air Fry - PB965BPTS - GE Appliances	Model #: PVM9179BLTS	Model #: XPIO13BCBT	Model #: XPIO23BCBT
★★★★★ (473)	★★★★★ (2279)	★★★★★ (2106)	★★★★★ (1460)	★★★★★ (34)	
469.00	599.00	719.00	629.00	599.00	

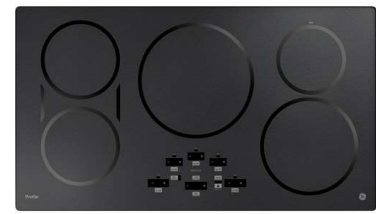

GE Profile™ 36" Built-In Touch Control Inductio...

Model #: PHP9036BMTS

★★★★★ (491)

2,221.00

SPECS & DETAILS

ACCESSORIES

Cooktop Cleaning	Cream Included Sponge
Optional Accessories	WB48X20862 Roller Rack

APPEARANCE

Color Appearance	Fingerprint Resistant Black Stainless
Oven Door Features	Big View Oven Window Full-Wrapped Metal Frame
Textured Steel Side Panels	Yes
Handle Color	Black Stainless
Handle Design	Designer Style

CAPACITY

Capacity (Cu. Ft.)	2.2 Upper / 4.4 Lower
Total Capacity (cubic feet)	6.6 cu ft

FEATURES

Configuration	Double Oven Range
Cooktop Burner Type	Radiant Smoothtop
Cooktop Surface	Black Patterned Ceramic Glass One-Piece Upswept
Control Location	Backsplash
Element - Left Front	8"/5" 1900W
Element - Left Rear	8" 2000W
Element - Right Front	12"/9"/6" 3600W Power Boil
Element - Right Rear	6" 1200W
Element - Center	6" 80W Warming Zone
Control Type	Digital Temperature Display Electronic Touchpads
Cooking System	True European Convection with Precise Air (Lower)
Product Type	Free-Standing Double Oven
Melt Setting	Yes
WiFi Connect	Built-In
Connected Capabilities	Amazon Alexa DiGiorno Drop IFTTT Inkit Sonos The Google Assistant
Heating Element "ON" Indicator Light	5
Hot Surface Indicator Lights	1
Oven Cleaning Type	Self-Clean with Steam Clean Option
Oven Cooking Modes	Bake Broil Convection Bake (Lower Oven) Convection Roast (Lower Oven) No Preheat Air Fry (Lower Oven) Proof (Lower Oven) Warming (Upper Oven)
Oven Features	6-Pass Broil Element (Lower) 8-Pass Broil Element (Upper) Hidden Bake (Both Ovens)
Oven Rack Features	2 Upper / 7 Lower Rack Positions 3 Heavy Duty Oven Racks
Range Control Features	Audible Preheat Signal Auto Oven Shut-Off with Override Auto Recipe Conversion Auto Self Clean Certified Sabbath Mode Chef Connect Control Lock Capability C° or F° Programmable Delay Bake Option (Time Cook) Delay Clean Option Electronic Clock & Kitchen Timer Fast Preheat Hi / Low Broil Oven "ON" Light Preheat Notification (Both Ovens) Self-Clean Cool Down Time Display
WiFi Enabled Features	Clock Sync Remote Control Remote Notifications Scan To Cook (Oven)
Cooking Technology	Traditional Upper; Convection Lower
Cooktop Type	Radiant Smoothtop
Fuel Type	Electric
Oven Interior	2 Incandescent

POWER / RATINGS

Amp Rating at 208V	40
Amp Rating at 240V	40
Bake Wattage	2650W Upper / 2650W Lower
Broiler Wattage	3000W Upper / 3600W Lower
KW Rating at 208V	12.0
KW Rating at 240V	16.0

WARRANTY

Parts Warranty	Limited 1-year entire appliance
Labor Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details

WEIGHTS & DIMENSIONS

Cabinet Width	30.0 in
Net Weight	161.0 lb
Oven Interior Dimensions (lower)	24 x 17 1/2 x 18 1/4
Oven Interior Dimensions (upper)	24 x 8-7/8 x 18-1/4
Overall Height	47.0 in
Overall Width	29.875 in
Overall Depth	28.25 in
Depth with Door Open	45.0 in
Depth Without Handle	25.75 in
Height to Cooking Surface (in.)	35 3/4 - 36 1/2