

JXi HEATER
POOL & SPA HEATER



Jandy®
Pro Series

JXi™
POOL & SPA HEATER

Ultra-Compact
Lightweight Design
Easy to Install

NOW with VersaFlo™
Integrated Bypass



JXi™ Swimming Pool & Spa Gas Heater

The Total Package

The JXi heater sets the standard in pool and spa heating technology with its ultra-compact size, lightweight design, and installation flexibility, making it a top choice for pool professionals and pool owners everywhere. The high-efficiency, low-NOx JXi is available in three BTU sizes, 200K, 260K, 399K, and offered in both natural and propane gas models.

Fastest Installation

Pro-driven features for the fastest, most customer-friendly installation include:

Ultra-Compact

2' x 2' footprint for small space requirements and maximum installation flexibility**

Lightweight Design

Weighs less than 126 pounds unpackaged for easy maneuverability and transport.

Best Retrofit Option

Plumbing flexibility for quick Mastertemp® and Max-E-Therm® replacement that requires no plumbing adjustments.

Easy VersaFlo Installation

The flow bypass valve is integrated into the JXi's header, requiring no external plumbing modifications.



**Refer to JXi manual for proper heater clearances that may apply.

Energy Efficient

84% thermal efficiency rating and **low-NOx** design surpasses strict DOE Energy Efficiency requirements.†

Automation-Ready

Convenience built in. AquaLink/iAquaLink-compatible with its RS485 interface.



AquaLink / iAquaLink™
COMPATIBLE
Sold separately

†84% Thermal Efficiency applies to 260K and 400K BTU Models with Copper Heat Exchangers, 200K BTU and all models with Cupronickel heat exchangers are 83%, see back page for complete model listing.

Features

Major competitor model*



Ultra-Compact Lightweight Design

Easy to store, transport, and install, JXi™ is 38% lighter with a 28% smaller footprint.

*Compared to major competitor models



Flexible Installation

180° rotatable top so you never need to rotate headers. Electrical panel flips up for ease of service.



Versa Plumb®-Ready


Installation in the VersaPlumb system* reduces plumbing costs and increases energy efficiency, all using the smallest footprint available.

*Sweep elbow included in all JXi models

Available VersaFlo Integrated Bypass for Maximum Hydraulic and Energy Efficiency

- » Up to 20 percent additional energy savings*
- » VersaFlo bypass is integrated into the JXi header, requiring no external plumbing modifications.
- » Automatic actuation of bypass is based on call for heat and does not require human interaction
- » Trade Series Exclusive

* versus similar system without VersaFlo

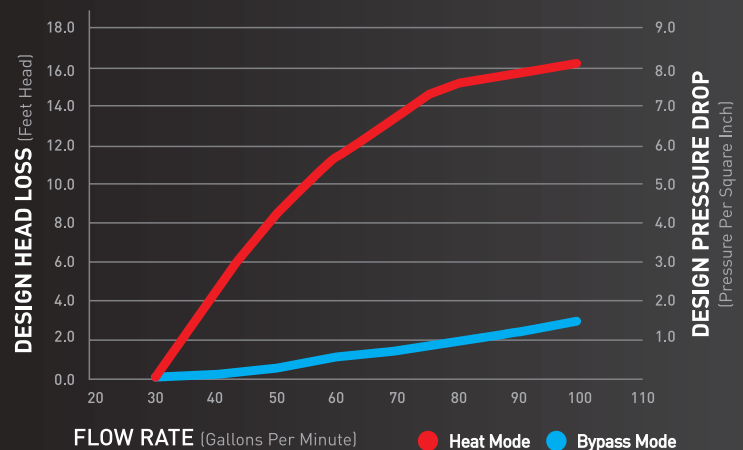

Heat Mode

While heating, water flow is directed through the heat exchanger and heated water is returned to the pool/spa.



Bypass Mode

VersaFlo Integrated Bypass diverts water flow around the heat exchanger when not heating water.



Additional Features



Weld-free combustion chamber for optimal corrosion resistance, models available with copper or cupronickel heat exchangers.



Venturi-driven air and gas mix for enhanced performance.




Reliable, balanced flow and temperature control with thermal regulator valve.




Differentiated limit switches meet applicable product safety standards.



Corrosion-resistant temperature sensors for reliable operation.

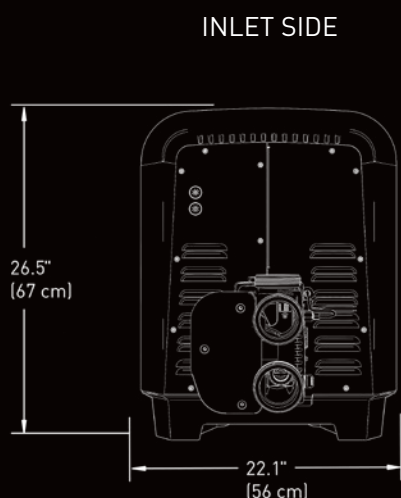

INLET SIDE

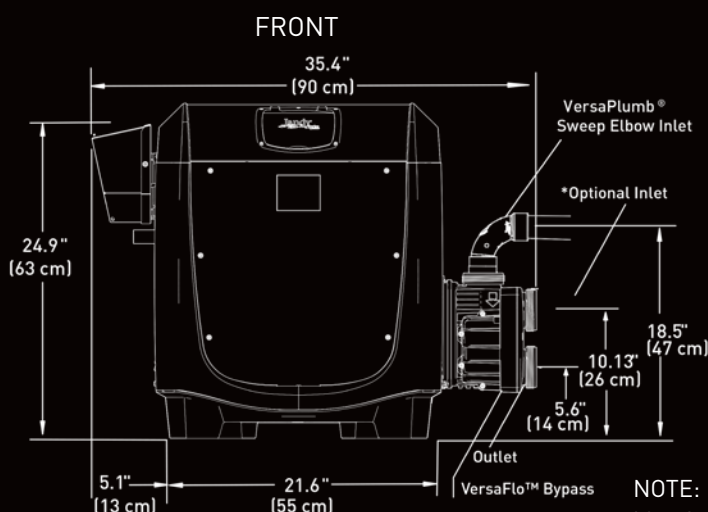

FRONT

NOTE: Dimensions are identical on all heater models

Available in the Following Models

Model #	Firing Rate	Gas Type	Heat Exchanger	Width	Depth	Height	Weight	Vent Diameter*	Minimum GPM	Maximum GPM
JXi200N	200K BTU	Natural Gas	Copper	22.9"	22.1"	26.5"	117 lbs.	6" (15 cm)	30	100
JXi260N	260K BTU	Natural Gas	Copper	22.9"	22.1"	26.5"	120 lbs.	7" (18 cm)	30	100
JXi400N	399K BTU	Natural Gas	Copper	22.9"	22.1"	26.5"	126 lbs.	8" (20 cm)	30	100
JXi400NN	399K BTU	Natural Gas	Cupronickel	22.9"	22.1"	26.5"	126 lbs.	8" (20 cm)	30	100
JXi400NK  w/VersaFlo	400K BTU	Natural Gas	Copper	22.9"	22.1"	26.5"	126 lbs.	8" (20 cm)	30	100
JXi200P	200K BTU	Propane	Copper	22.9"	22.1"	26.5"	117 lbs.	6" (15 cm)	30	100
JXi260P	260K BTU	Propane	Copper	22.9"	22.1"	26.5"	120 lbs.	7" (18 cm)	30	100
JXi400P	399K BTU	Propane	Copper	22.9"	22.1"	26.5"	126 lbs.	8" (20 cm)	30	100
JXi400PN	399K BTU	Propane	Cupronickel	22.9"	22.1"	26.5"	126 lbs.	8" (20 cm)	30	100
JXiVFKIT  JXi VersaFlo Accessory Kit										

 Trade Series Exclusive product; not available for Internet sale. *Minimum vent pipe size for Category I installations.

2 units per pallet

Zodiac Pool Systems, Inc.

2620 Commerce Way, Vista, CA 92081

1.800.822.7933 | www.zodiac.com

