1 DOOR SCHEDULE

DOOR MARK	OPENING SIZE	THICKNESS	(FOR NOTES SEE 3/A2.1) DOOR TYPE (NOTE 1)	CONSTRUCTION (NOTE 2)	FINISH (NOTE 3)	GLASS (NOTE 4)	RATING (NOTE 5)	FRAME (NOTE 6)	FRAME TYPE (SEE 6/A2.1)	FRAME DETAILS (REF. SHEET A2.1) H	J	S	REMARKS
101	3'-0"x7'-0"	1-3/4"	AS2	AL	AA	TP	–	AA	–	10	11	12	1
101A	4'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
101B	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
101C	3'-0"x7'-0"	1-3/4"	AS2	AL	AA	TP	–	AA	–	10	11	12	1
201	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
201A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
202	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
301	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
301A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
302	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
401	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
401A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
402	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
403	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
404	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
501	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
501A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
502	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
601	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
601A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
601B	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
602	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
603	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
701	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
701A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
702	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
801	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
801A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
801B	RENUMBERED												
802	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
803	RENUMBERED												
901	6'-0"x7'-0"	1-3/4"	AS2	AL	AA	TP	–	AA	–	10	11	12	1
902	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 5
902A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
903	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
904	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 6, 7
905	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
906	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3
1001	6'-0"x7'-0"	1-3/4"	AS2	AL	AA	TP	–	AA	–	10	11	12	1
1002	3'-0"x7'-0"	–	–	--	FF	–	–	HMP	2	21	22	23	9
1002A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	1HR	HMP	1	13	14	15	10
1003	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
1004	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
1005	3'-0"x7'-0"	1-3/4"	MG7	HM	P	–	–	HMP	2	21	22	23	3, 8
1101	6'-0"x7'-0"	1-3/4"	AS2	AL	AA	TP	–	AA	–	10	11	12	1
1102	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 5
1102A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
1103	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
1104	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7
1105	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
1106	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7, 8
1201	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
1201A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
1301	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	4
1401	3'-0"x7'-0"	1-3/4"	AS1	AL	AA	TP	–	AA	–	10	11	12	1
1401A	3'-0"x7'-0"	1-3/4"	MV1	HM	P	–	–	HMP	1	13	14	15	
1402	3'-0"x7'-0"	1-3/4"	FW	SC	P	–	–	HMP	2	21	22	23	3, 7

2 DOOR REMARKS

1. DOOR IS PART OF STOREFRONT SYSTEM, SEE STOREFRONT SCHEDULE AND DETAILS.
2. CASED OPENING
3. DOOR FINISH SHOWN TO INDICATE FINISH BY TENANT. PAINTING OF DOOR IS NOT IN CONTRACT.
4. VIEWER NOT PROVIDED FOR THIS DOOR.
5. INSTALL CLOSER ON RECEIVING ROOM SIDE OF DOOR.
6. WALL HAS EXTRA LAYER OF O.S.B., ADJUST FRAME WIDTH ACCORDINGLY.
7. UNDER CUT DOOR 1"
8. STOCKROOM DOOR WITH ONE-WAY VIEWING WINDOW. PASSAGE SET – SCHLAGE S100-LEV (LEVER HANDLES) WITH SATIN CHROME FINISH NO. 626. WALL BUMPER TO BE IVES 410 (810). FINISH FINISH TO BE SATIN CHROME. DOOR AND HARDWARE SUPPLIED AND INSTALLED BY LANDLORD CONTRACTOR. 12" X 12" ONE-WAY VIEWING WINDOW CNETERED IN DOOR AT 60" AFF.
9. STOCKROOM DOOR: BI-DIRECTIONAL DOOR W/ AN AIR SEAL. MANUFACTURED BY CQP MODEL #990R W/ 1/4" X 14" X 16" ONE WAY VIEWING WINDOW, 18" SCUFF PLATE AND PERIMETER GASKET OR CARLSON MODEL #T8 W/ 1/4" X 12" X 20" ONE WAY VIEWING WINDOW. 18" SS SCUFF PLATE AND PERIMETER GASKET. STOCKROOM DOOR TO BE BEIGE ABS CLAD. TO INCLUDE HEADER STOP AND PULL HANDLE. DOOR AND HARDWARE SUPPLIED AND INSTALLED BY LANDORD CONTRACTOR.
10. REAR EXIT DOOR. UNFINISHED DOOR AND FRAME SUPPLIED, INSTALLED, AND FINISHED BY LANDLORD'S CONTRACTOR. DOOR AND FRAME TO BE (1) HOUR FIRE RATED, "B" LABEL TO COMPLY WITH LOCAL AND STATE CODES. HINGES – STANLEY #FBB179 SECURITY STUD HINGE (OR EQUAL). STAINLESS STEEL FINISH, 1 ½ PAIR PER DOOR. LANDLORD'S CONTRACTOR TO SUPPLY AND INSTALL THESE ITEMS: (2) HEAVY DUTY INDUSTRIAL SQUARE SLIDE BOLTS, 1700 SERIES, #170BTB, MANUFACTURED BY GLYNN-JOHNSON (OR EQUAL); 3" X 11" TAMPER-PROOF LATCH COVER, MANUFACTURED BY LATCH-GUARD INC.; FULL DOOR WIDTH SEAL/SWEEP, STANLEY #5070 – US28 MOUNTED ON EXTERIOR SIDE AT BOTTOM TO PREVENT RODENT OR WATER PENTRATION; PERIMETER OF DOOR IS TO RECEIVE A SMOKE GASKET; (IF EXISTING-DOOR MUST HAVE FULL WEATHER-STRIPPING, THRESHOLD AND DOOR SWEEP IN GOOD WORKING CONDITION) PEEP HOLE CENTERED IN DOOR AT 54" A.F.F. AND CLOSER WITH STAINLESS STEEL FINISH #R9120 PARALLEL ARM CLOSER MANUFACTURED BY RUSSWIN CO. MOUNTED ON STORE SIDE. STORE SIGN LABEL ON OUTSIDE FACE OF DOOR CENTERED AT 66" A.F.F. SIGN IS PROVIDED BY OWNER AND INSTALLED BY LANDLORD'S CONTRACTOR. LANDLORD'S CONTRACTOR TO INSTALL SARGENT & GREENLEAF, INC. MODEL "ARM-A-DOOR" A101-SERIES ALARMED AUTOMATIC RELOCK PANIC BAR WITH SATIN CHROME FINISH, CENTERED AT 45" A.F.F BY LANDLORD.

3 DOOR NOTES

1	DOOR TYPES, SEE ELEVATION DRAWINGS 5/A2.1
2	DOOR CONSTRUCTION: SC = SOLID CORE; HC = HOLLOW CORE; HM = HOLLOW METAL; AL = ALUMINUM ANODIZED; SR = STILE AND RAIL (RAISED PANEL OR GLASS)
3	FACING & FINISH: S = STAINED; P = PAINTED; PL = PLASTIC LAMINATE; AA = ALUMINUM ANODIZED; FF = FACTORY FINISH
4	GLASS: CP = CLEAR PLATE; SG = SHEET GLASS; CW = CLEAR WIRE, 1/4"; TP = TEMPERED PLATE, 1/4"; LG = LAMINATED SAFETY GLASS, 1/4"; LIG = LAMINATED/INSULATED GLASS, 1"
5	20, 45, 60, 90, 120, ETC... INDICATES MINUTES OF FIRE RATING FOR BOTH DOOR AND FRAME
6	FRAME MATERIAL & FINISH: WS = WOOD STAINED; WP = WOOD PAINTED; HMP = HOLLOW METAL PAINTED; AA = ALUMINUM ANODIZED; HMF = HOLLOW METAL PRE-FINISHED

5 DOOR TYPES

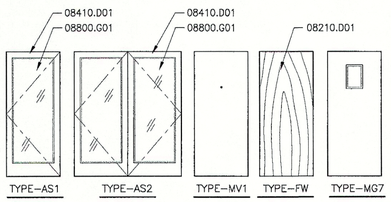

6 FRAME TYPES

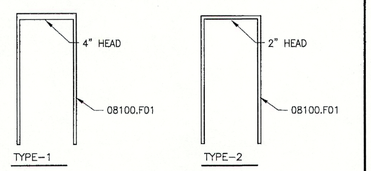



10 DETAIL 1A2.1 @ HEAD 3"=1'-0"

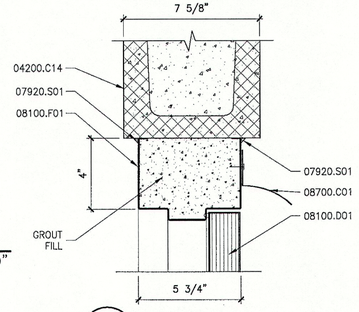

13 DETAIL 1A2.1 @ HEAD 3"=1'-0"

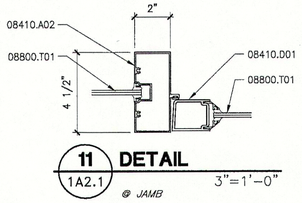

11 DETAIL 1A2.1 @ JAMB 3"=1'-0"

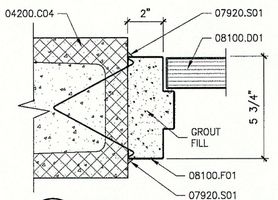

14 DETAIL 1A2.1 @ JAMB 3"=1'-0"

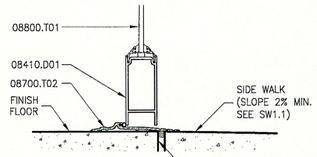

12 DETAIL 1A2.1 @ SILL 3"=1'-0"



15 DETAIL 1A2.1 @ SILL 3"=1'-0"

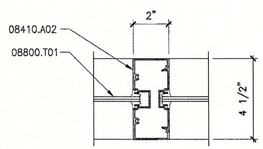

16 DETAIL 7A2.1 @ VERT. MULLION 3"=1'-0"



17 DETAIL 7A2.1 @ HORIZ. MULLION 3"=1'-0"

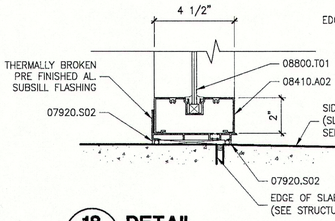

18 DETAIL 7A2.1 @ SILL 3"=1'-0"

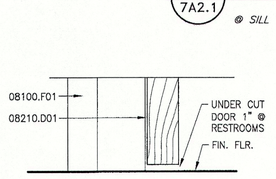

23 DETAIL 1A2.1 @ SILL 3" = 1'-0"

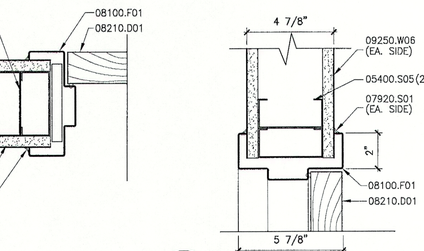

22 DETAIL 1A2.1 @ JAMB 3" = 1'-0"

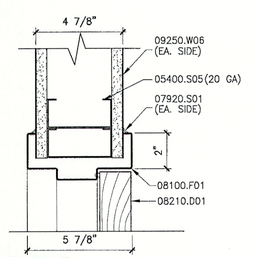

21 DETAIL 1A2.1 @ HEAD 3" = 1'-0"

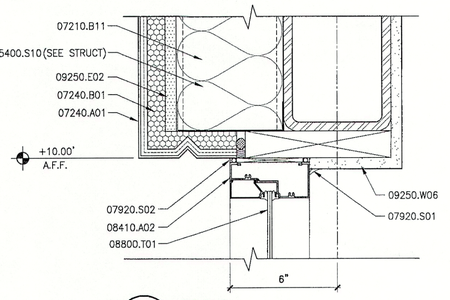

19 DETAIL 7A2.1 @ HEAD 3"=1'-0"

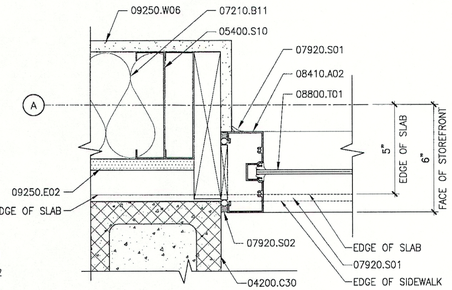

20 DETAIL 7A2.1 @ JAMB 3"=1'-0"

4 KEYNOTES

04200.C04	8 x 8 x 16 C.M.U., SMOOTH FACED, RUNNING BOND
04200.C14	8 x 8 x 16 C.M.U. U-BLOCK, SMOOTH FACED, CONC. FILL W/ #5 BARS
04200.C30	8 x 8 x 16 C.M.U., SMOOTH FACED, SCORED, RUNNING BOND
05400.S05	3-5/8" MTL. STUD @ 24" O.C., GAUGE AS SHOWN IN PARENTHESIS
05400.S10	6" MTL. STUD @ 16" O.C., GAUGE AS SHOWN IN PARENTHESIS
07210.B11	BATT INSULATION: 5-1/2" THICK, R-19, KRAFT-FACED
07240.A01	E.I.F.S. OVER INSULATION BOARD, SEE DETAILS
07240.B01	1" EPS INSULATION BOARD, ADHESIVE ATTACHED
07920.S01	FLEXIBLE SEALANT
07920.S02	FLEXIBLE SEALANT W/ BACKER ROD
08100.D01	HOLLOW METAL DOOR
08100.F01	HOLLOW METAL FRAME
08210.D01	FLUSH WOOD DOOR
08410.A02	ALUM. STOREFRONT FRAMING COMPONENT
08410.D01	ALUM. STOREFRONT DOOR
08700.C01	DRIP CAP: SEE SCHEDULE
08700.T02	HANDICAPPED ACCESSIBLE THRESHOLD
08800.G01	1" INSUL GLASS
08800.T01	1/4" CLEAR TEMPERED GLASS
09250.E02	5/8" EXTERIOR GYPSUM SHEATHING, GLASS MAT FACING
09250.W06	5/8" GYPSUM BOARD

7 STOREFRONT SCHEDULE

STOREFRONT MARK	FRAME TYPE (SEE 1/A2.2)	WIDTH	HEIGHT	MATERIAL (NOTE 1) (SEE 8/A2.1)	GLASS (NOTE 2) (SEE 8/A2.1)	FRAME DETAILS (REF. SHEET A2.1) H	J	S	REMARKS SEE 24/A2.1
A	1	73'-0"	10'-0"	AL	SG	19	20	18	1,2,3
B	2	16'-4"	10'-0"	AL	SG	19	20	18	1,2
C	2	16'-8"	10'-0"	AL	IG	19	20	18	1,2
D	3	31'-8"	10'-0"	AL	SG	19	20	18	1,2
E	2	14'-8"	10'-0"	AL	SG	19	20	18	1,2
F	4	32'-3"	10'-0"	AL	SG	19	20	18	1,2
G	5	37'-7"	10'-0"	AL	SG	19	20	18	1,2
H	1	56'-0"	10'-0"	AL	SG	19	20	18	1,2
J	6	28'-0"	10'-0"	AL	SG	19	20	18	1,2

8 STOREFRONT NOTES

1	FRAME MATERIAL: AL = ALUMINUM; WD = WOOD; STL = STEEL
2	GLASS: SG = SINGLE GLAZING; DG = DOUBLE GLAZING; IG = WELDED INSULATED GLASS; LG = LAMINATED SAFETY GLASS

24 STOREFRONT REMARKS

1. CONTRACTOR TO PROVIDE ALTERNATE PRICE FOR CLEAR FINISH ON STOREFRONT IN LIEU OF DARK BRONZE NOTED IN SPEC.
2. CONTRACTOR TO PROVIDE ALTERNATE MANUFACTURER OPTION FOR STOREFRONT IN LIEU OF KAWNEER NOTED IN SPEC.
3. CONTRACTOR TO PROVIDE AND INSTALL TINT ON STOREFRONT GLASS. VERIFY SPECIFICATIONS WITH DEVELOPER PRIOR TO INSTALLATION.

25 GENERAL NOTES

1. CONTRACTOR TO PROVIDE ALTERNATE PRICE FOR PARTICLE BOARD CORES FOR INTERIOR WOOD DOORS IN LIEU OF SOLID WOOD CORE NOTED IN SPEC.
2. CONTRACTOR TO PROVIDE ALTERNATE MANUFACTURER OPTION FOR DOOR HARDWARE IN TENANTS A, B, C, D, E, F, G, H, AND M. LIGHT COMMERCIAL GRADE IN LIEU OF HEAVY DUTY COMMERCIAL NOTED IN SPEC.

REVISION	DESCRIPTION	DATE	BY
1	REV #6	3/13/09	LMR
2	REV #5	12/4/08	CJC
3	REV #4	6/5/08	CJC
4	REV #3	3/4/08	LMR
5	REV #1	9/17/07	LMR

DDG DUPLANTIS DESIGN GROUP, PC
Respect • Integrity • Client Satisfaction • Excellence
THIBODAUX MANDEVILLE HOUSTON
Civil Engineering • Site Development • Land Planning • Public Works • Architecture
314 East Bayou Road Phone: 985.447.0090
Thibodaux, Louisiana 70301 Fax: 985.447.7009

SIGNATURE: DATE: 3/17/09

STAMP

PROPOSED RETAIL DEVELOPMENT
CITY OF BOUTTE
ST. CHARLES PARISH, LOUISIANA
FOR THE SPECTRA GROUP, INC.
MEMPHIS, TENNESSEE

DRAWN	LMR
CHECKED	SMV
DATE	8/13/07
SCALE	AS NOTED ON DWG
PROJECT NO.	07-205A
FILE:	REVISION 6\A2-1.DWG
SHEET	A2.1

I:\DUPLANTIS\07-205A\DWG\ #6 (3-5-09)\A2-1.dwg, 3/17/2009 8:34:20 AM, lmenroe