

Tom Redditt Sales Agency

Mfr: Vollrath
Model: 97120



SPECIFICATIONS

Applications: General storage and movement of trays, pans, tote boxes, and other items of different sizes. Designed for use where strength and versatility are important.

Construction: High tensile extruded aluminum.

Pan Supports: Pan supports are 1" x 1½" x .080" extruded aluminum.


Side Frames: Top and bottom horizontal members are 1½" x 1½" square extruded aluminum tubing welded to 1½" x 2½" x .125" vertical extruded tee. Side frames are assembled with four (or six) high tensile extruded aluminum bars.

Casters: Stem type 5" x 1½" diameter non-marking swivel casters, NSF listed. Polyurethane wheels, and wheel brakes are available at extra cost.

Freight Classification: Racks, N.O.I., KD item 164390, Sub 8, Class 85.

Options: Polyurethane wheels • wheel brakes
• .062" aluminum back panel • tray stops.

RACK ASSEMBLY INSTRUCTIONS

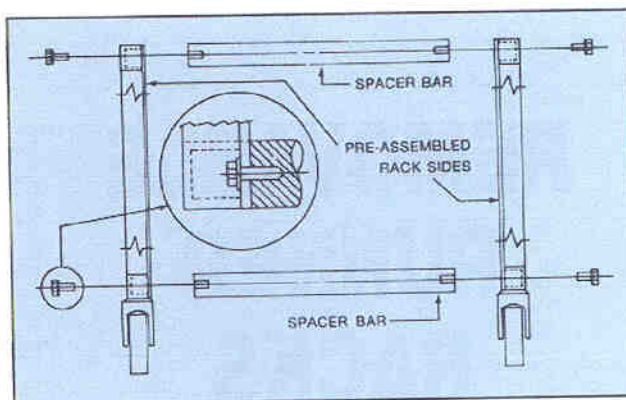

1. Choose level floor area for assembly.
2. Lay-out rack parts, (4) or (6) spacer bars, (2) pre-assembled rack sides, and (8) or (12) ½" x 1" long hex screws with washer heads.
3. Insert hex screw, through rack side, and drive into spacer bar with ½" hex wrench as shown. Tighten to snug fit, until all (8) or (12) screws have rack assembled. Then tighten all screws to firm tightness.

MODEL NUMBER	CENTER SPACING 1½"	OVERALL DIMENSIONS			"18" X 26" PAN CAPACITY	APPROXIMATE WEIGHT
		HEIGHT	WIDTH	DEPTH		
RR69-20	3"	69"	21 1/8"	26 3/4"	20	48 lbs.
RR69-14	4 1/2"	69"	21 1/8"	26 3/4"	14	42 lbs.
RR69-10	6"	69"	21 1/8"	26 3/4"	10	38 lbs.
RR63-18	3"	63"	21 1/8"	26 3/4"	18	44 lbs.
RR63-12	4 1/2"	63"	21 1/8"	26 3/4"	12	38 lbs.
RR63-9	6"	63"	21 1/8"	26 3/4"	9	35 lbs.
RR57-16	3"	57"	21 1/8"	26 3/4"	16	40 lbs.
RR57-11	4 1/2"	57"	21 1/8"	26 3/4"	11	35 lbs.
RR57-8	6"	57"	21 1/8"	26 3/4"	8	32 lbs.
RR35-9	3"	35"	21 1/8"	26 3/4"	9	30 lbs.
RR35-6	4 1/2"	35"	21 1/8"	26 3/4"	6	27 lbs.
RR35-5	6"	35"	21 1/8"	26 3/4"	5	26 lbs.
RR29-7	3"	29"	21 1/8"	26 3/4"	7	25 lbs.
RR29-5	4 1/2"	29"	21 1/8"	26 3/4"	5	23 lbs.
RR29-4	6"	29"	21 1/8"	26 3/4"	4	22 lbs.

* Spacer bars may be ordered any length to satisfy virtually any size pan.

For each extra pair of pan supports, add \$8.00 to list price.

Tom Redditt Sales Agency

Quizno's

Item # 1 Vollrath

97120

UTILITY CART

Utility Cart, 300 lb. cap.,
Stainless, 3-Shelf Truck,
shelves measure 15
1/2"x24", unit measures 27
1/2"Lx15 1/2"Wx32 5/8"H,
13 1/4" between shelves, 3
1/2" casters, USA made

