

## **SANDWICH WARMER**

### **MODEL QT14**

#### **Features/Benefits:**

- Holman's Sandwich warmer is designed to warm a variety of sandwiches saving time (pass through time is under one minute), money and space.
- Patented Forced Convection keeps the Sandwich Warmer cool to the touch and extends life of critical components. The forced air convection increases productivity by re-circulating, pre-heated air in the warming chamber.
- Quartz Infrared heating elements, located above and below conveyor belt, provide faster more consistent heating compared to traditional heating elements.
- Stainless steel 14" wide conveyor belt has continuous, horizontal moving surface (right to left) for smooth and easy loading and unloading of sandwiches. Unit can be ordered with conveyor belt moving left to right or right to left depending on your menu requirements.
- Heat limit switch interrupts power to heating elements in an event air flow has been blocked and/or crumb tray is not in place keeping unit from over heating providing safe operations.
- Product entry and exit openings are 3" high x 16" wide to allow a variety of sandwich options.
- Removable crumb tray and exit tray for easy cleaning.
- Adjustable 4" legs to line up with other Star/Holman equipment.
- 24/7/365 -24 hours/7 days a week/365 days a year technical support by Holman technicians.



**Model QT14**

#### **Applications:**

Holman sandwich warmer is perfect for Sandwich Shops, Food Courts, Ice Cream Shops, Cafeterias, Deli's, Convenient Stores, or anywhere you want warm delicious sandwiches.

#### **Quality Construction:**

Sandwich warmer is constructed of all stainless steel with a stainless steel 14" wide conveyor belt. Conveyor belt travels left to right, but may be ordered from right to left. Unit is 208V and 240V and must be hard wired or supplied with a minimum of 50 amp plug and outlet.


#### **Warranty:**

Sandwich Warmer is covered by Holman's one-year parts and labor warranty.



## SANDWICH WARMER

### MODEL QT14

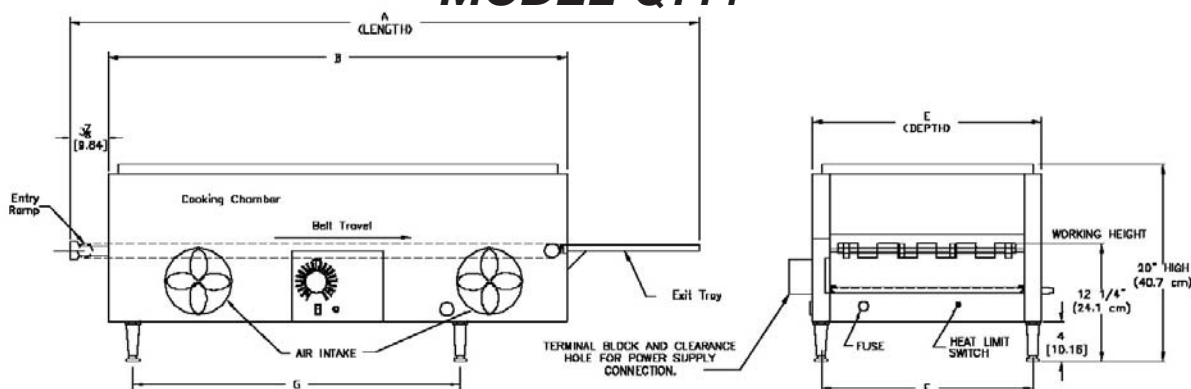

**QT14**

#### Performance Data

Model No.	Product Opening		Legs
	Width Inches (cm)	Height Inches (cm)	
QT14	16 (40.6)	3 (7.6)	4"

#### Specifications

Model No.	Dimensions			Weight lbs. (kg)	Length Inches (cm)	Shipping Depth Inches (cm)	Height Inches (cm)
	(A) Width Inches (cm)	(B) Depth Inches (cm)	(C) Height Inches (cm)				
QT14	55 (139.7)	24 (60.9)	20 (50.8)	170 (77.1)	48 (121.9)	27 (68.5)	27 (68.5)

#### Electrical Data

Model No.	Volts	HZ 1 Phase	Amps	Watts	Heating Elements			
					Above Belt	Wattage	Below Belt	Wattage
QT14	208	60	37.5	7,800	10	375	6	675
	220	60	35.4	7,800	10	375	6	675
	240	60	32.5	7,800	10	375	6	675
QT14	220	50	35.4	7,800	10	375	6	675
	240	50	32.5	7,800	10	375	6	675

\*Model QT14 is a non-stackable piece of equipment.

#### Typical Specifications

Sandwich warmer is constructed of corrosion resistant stainless steel. Supplied with dual purpose fan, and fast heat up quartz infrared heaters. Units are supplied with power saver high limit switch and 4" adjustable legs. Units should be located at least 6" from wall or other appliance (on left side) to allow proper clearance for fan. U.S. patent #4,386,558, #4,465,701 and #4,534,987; Canadian patent #116129-1984 and other patents pending U.S. and foreign.

Units are listed with UL, CUL and are UL certified to NSF4. Printed in the U.S.A.

