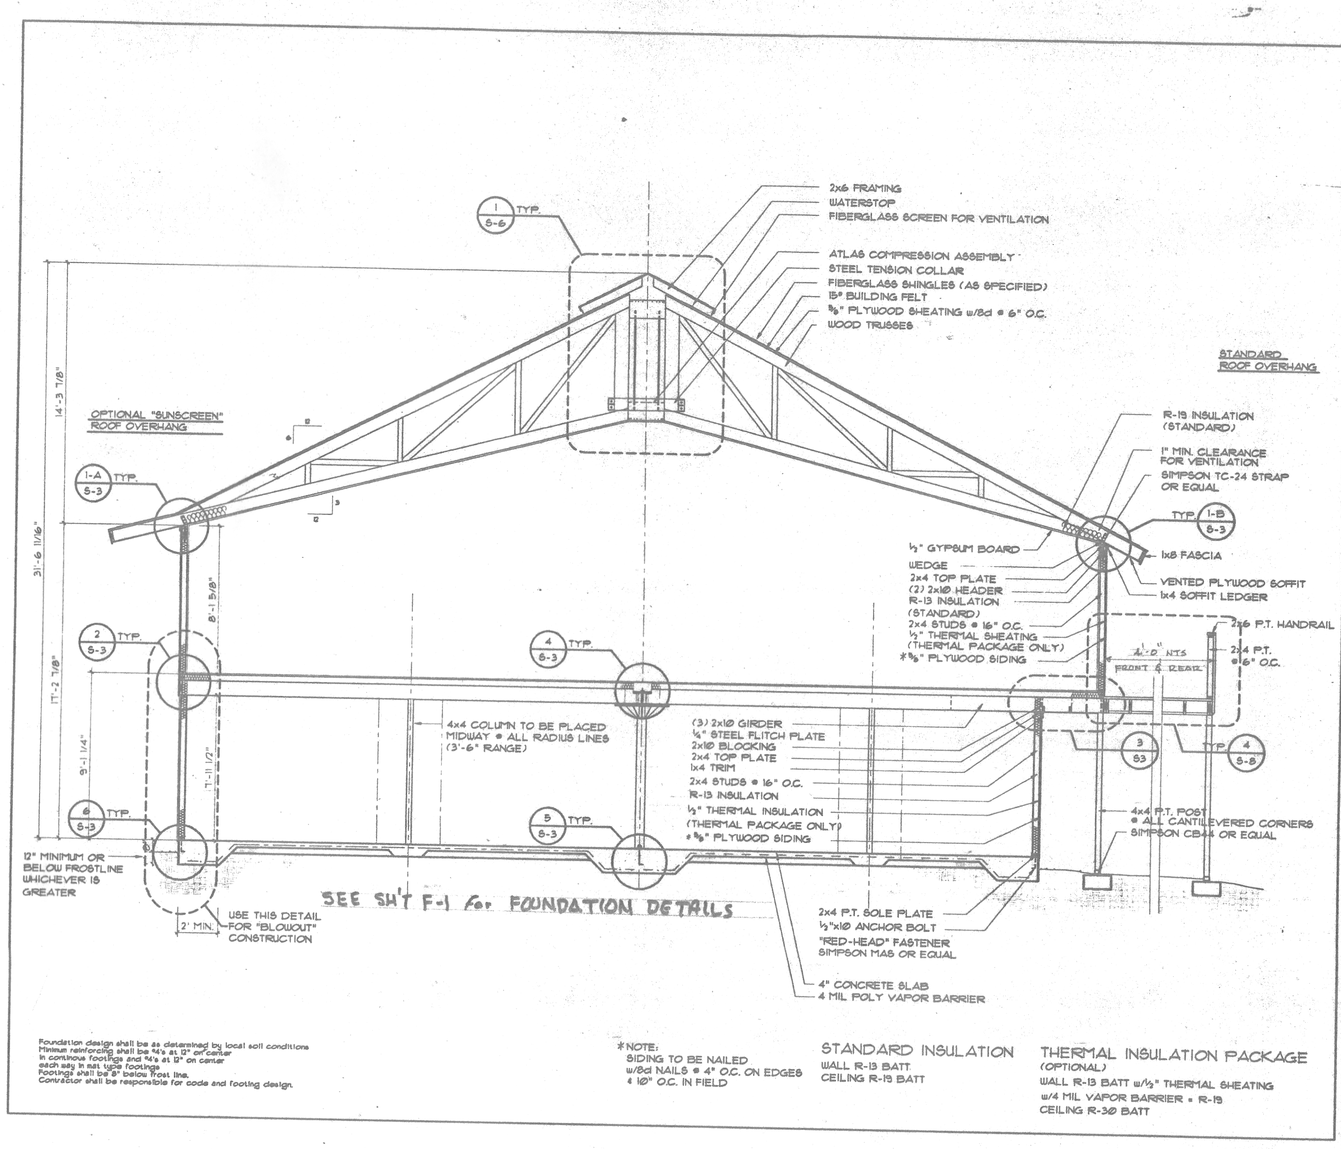

Foundation design shall be as determined by local soil conditions
Minimum reinforcing shall be #4's at 12" on center
in continuous footings and #4's at 12" on center
each way in mat type footings
Footings shall be 8" below frost line.
Contractor shall be responsible for code and footing design.

*NOTE:
SIDING TO BE NAILED
w/8d NAILS @ 4" O.C. ON EDGES
& 10" O.C. IN FIELD

STANDARD INSULATION
WALL R-13 BATT
CEILING R-19 BATT

THERMAL INSULATION PACKAGE
(OPTIONAL)
WALL R-13 BATT w/½" THERMAL SHEATING
w/4 MIL VAPOR BARRIER + R-19
CEILING R-30 BATT

SHEET 2 OF 12

REV. DATE

SCALE: ¼" = 1'-0"
DATE: 1-10-91

MODEL: 4000
DRAWING TYPE: BUILDING SECTION

Eagle's Nest Homes

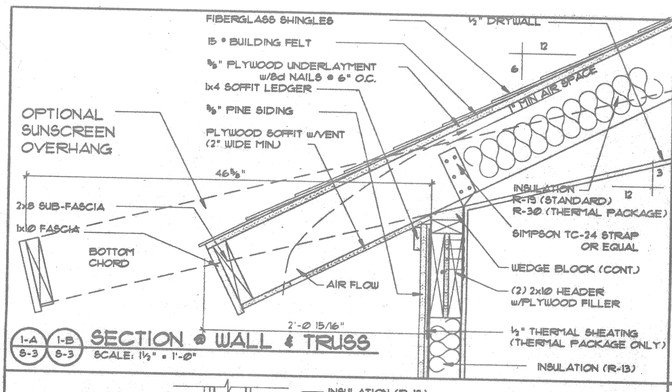

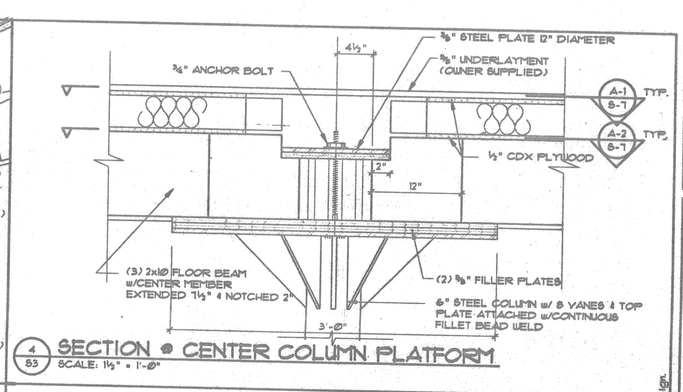

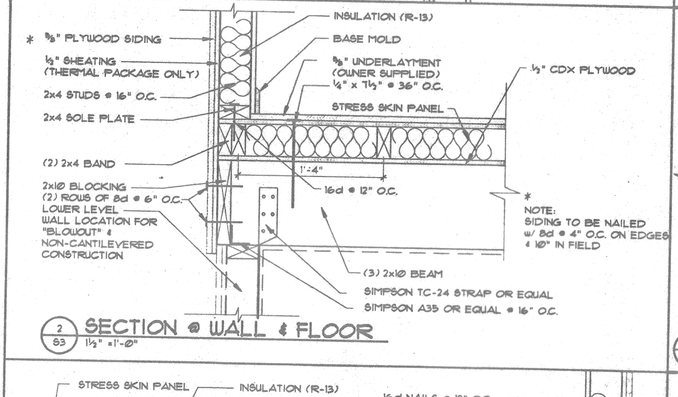

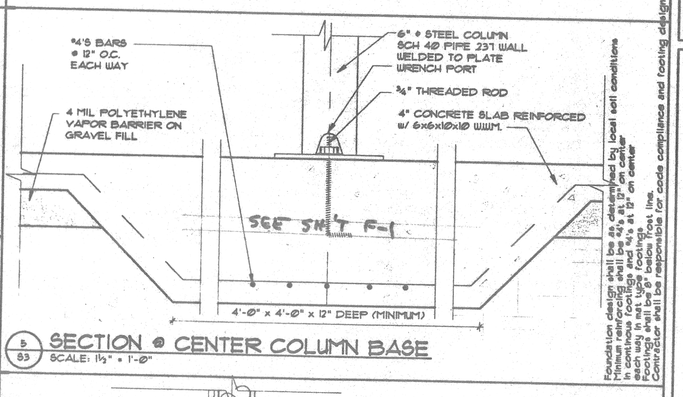

Foundation design shall be as determined by local soil conditions
Minimum reinforcing shall be #4's at 12" on center
in continuous footings and #4's at 12" on center
each way in mat type footings
Footings shall be 8" below frost line.
Contractor shall be responsible for code compliance and footing design.

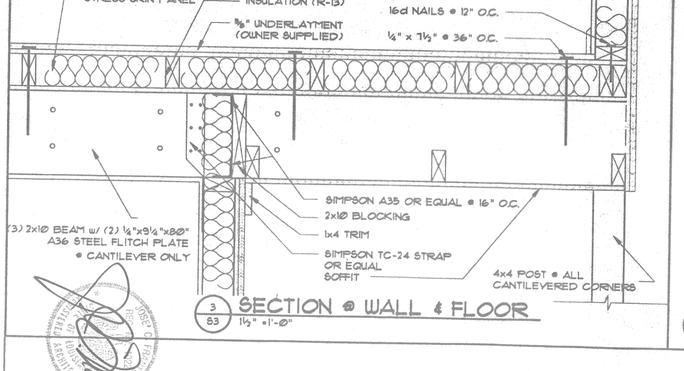

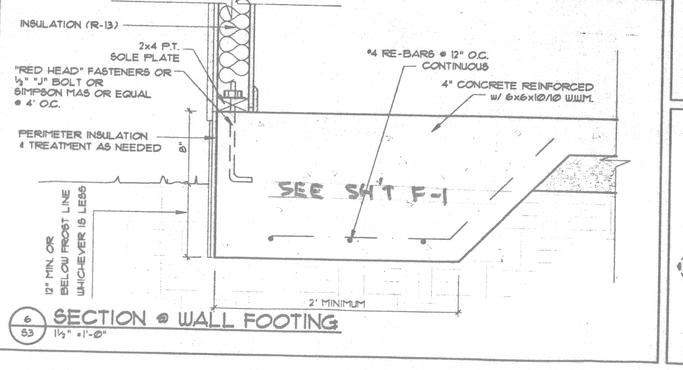

SHEET 5-3 OF 16

REV. DATE

SCALE: 1½" = 1'-0"
DATE: 1-10-91

MODEL: 4000
DRAWING TYPE: SECTION DETAILS

Eagle's Nest Homes

REVIEWED FOR GENERAL STATE REQUIREMENTS AS PER ROY S. STEVENS

J. C. FRANTZ, ARCHITECT

CERTIFICATION

N.C.A.R.B. 8026 — LOUISIANA 1022 — MISSISSIPPI 733

DRAWN	
CHECKED	J C FRANTZ
DATE	June 4th 1986
SCALE	1/4" = 1'-0"
JOB NO.	9017.06
SHEET	5 of 9