



# Mission Collection® Gable Plates

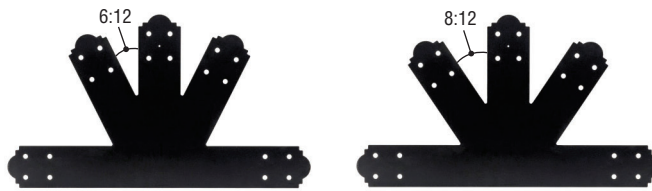

APGP612

APGP812




APGP1212

## Add Style with **Gable Plates**

The Mission Collection gable plates add a southwestern flair and additional strength to any outdoor living space. They provide reinforcement for a connection from a 6x or larger wood beam to three angled wood braces. Three sizes are available: with the angled braces at 6:12 pitch (27°), 8:12 pitch (34°) and 12:12 pitch (45°). Gable plates are installed with Outdoor Accents® structural wood screws and hex-head washers.


### Gable Plates

Model No.	Ga.	Roof Pitch	Angle (deg.)	Dimensions (in.)			Fastener Qty.			DF/SP Allowable Loads (lb.)
				W	H	L	Beam	Center Column	Angled Struts	Uplift (160)
APGP612	12	6:12	27°	5	20½	36	16	8	16	3,925
APGP812		8:12	34°							
APGP1212		12:12	45°							

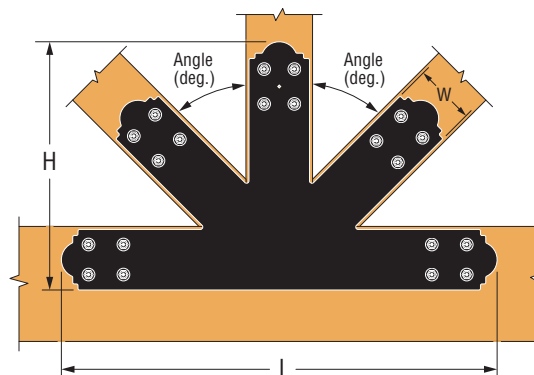


APGP1212 shown

1. Allowable loads have been increased for wind or earthquake loading with no further increase allowed. Reduce where other loads govern.
2. Connector table loads and fastener quantities are listed for two parts. For single part installations, use half the listed values.
3. Uplift loads apply to the connection between the center vertical post and the beam.
4. All fasteners are Outdoor Accents SDWS22312DBB structural wood screws inserted through an STN22 hex-head washer. Quantities listed are for two parts. Fasteners sold separately.

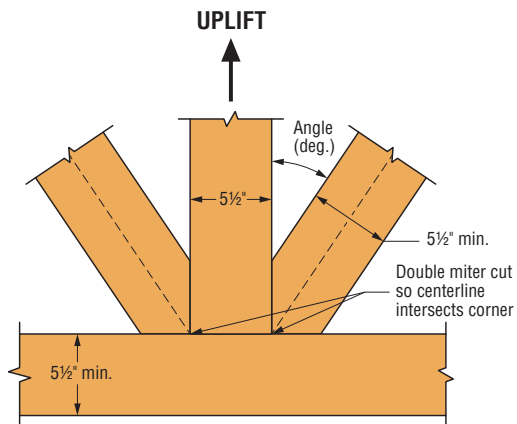

**Note:**  
12:12 will have equal cuts. Other sizes will have unequal cuts.

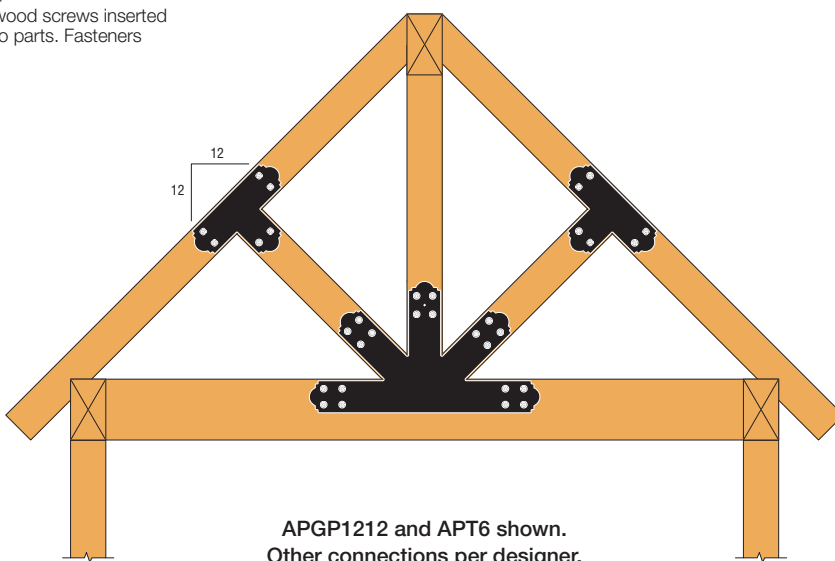

APGP1212 and APT6 shown.  
Other connections per designer.