





The E5 Series was designed to provide economical and efficient emergency lighting. The E5 is easy to install in any orientation, and the heads are fully adjustable.

Front View

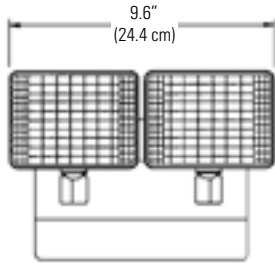

Side View

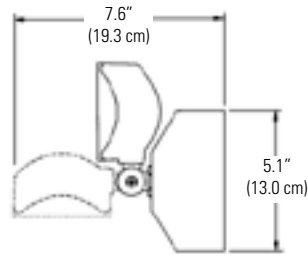

Complete Fixture consists of unit and two lamp heads. Select options and accessories below.

How to Specify:

E5	
SERIES	HOUSING COLOR
E5 = 6V, 11W Emergency Lighting Fixture	W = White B = Black

Unit Battery Capacity


DC Voltage	Unit	Standard Lamp Head	Watts to 87½ of Rated Voltage*
6	E5	S6	1½ hrs. 11

* Per NEC Specifications

Lamp Head Photometrics


S6- 6 Volt, 5.4 Watt, Tungsten

VERTICAL

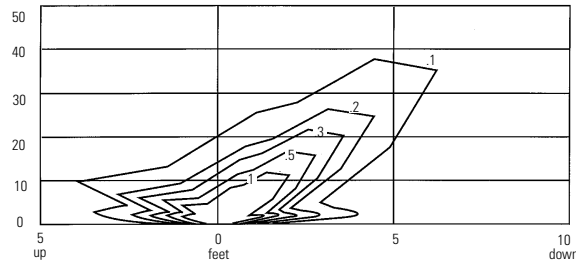

S6- 6 Volt, 5.4 Watt, Tungsten

HORIZONTAL

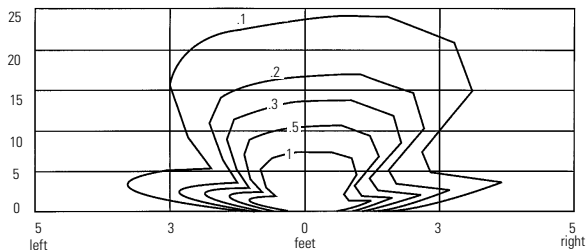

Features

- 1. Illumination:** Two fully adjustable polycarbonate lamp heads utilize a high performance parabolic reflector in conjunction with a 6 VDC, 5.4 watt T-5 wedge base tungsten lamp.
- 2. Housing:** Constructed of impact resistant, UL 94 V-0, 5 VA white or black thermoplastic. Thermoplastic backplate is easily installed to a standard junction box. Backplate and housing snap together to complete a secure mechanical connection.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance free, sealed lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C).
- 5. Input Power Requirements:** 120 VAC - 0.044 amps, 4.16 watts; 277 VAC - 0.02 amps, 4.16 watts

Code Compliance

UL 924 listed, UL damp location listing optional.

Options

DL = UL Damp Location Listing

Accessories

- WG5 = Wire Guard
- PCS1 = Polycarbonate Vandal Shield

Warranty

Electronics: 3 years
Battery: 1 year full, 4 years pro-rata

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • C0303

LIGHTOLIER