

PLUMBING ROUGH-IN SCHEDULE

THE SAENGER
THEATRE RENEWAL
PROJECT
142 North Rampart Street
New Orleans, LA

Client
Saenger Theatre Redevelopment Company
200 West Loop South, Suite
1040 Houston TX 77027

Architect
MARTINEZ+JOHNSON
ARCHITECTURE

1412 Eye St. NW
Washington, DC 20005
202.333.4480

Structural Engineer
Shawn J. Franke, P.E.
540 Helmer Road San
Antonio TX 78232
210.979.7900


Theatre Consultant
Schuler Shook
123 Third Street North #210
Minneapolis, MN 55401
612.335.9599

Acoustical Engineer
Akustiks
93 North Main Street South
Norwalk, CT 06854
202.299.1904

MEP Engineer
JBA Consulting Engineers, Inc.
3525 N. Causeway Blvd., Suite
500 Metairie, LA 70002
504.830.0139

Civil Engineer
Linfield, Hunter, & Junius, Inc.
3608 18th Street Suite 200
Metairie, LA 70002
504.835.6300

Architectural Historian
EHT Traceries, Inc.
1121 Fifth Street NW
Washington, DC 20001
202.393.1199

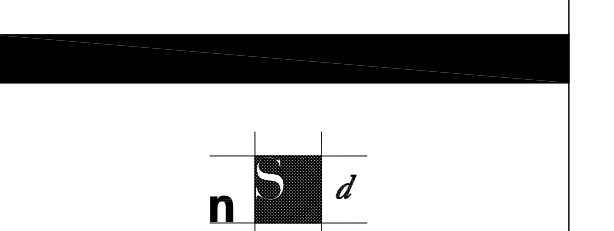

Next Step Design
FOODSERVICE CONSULTANTS
1116 West Street, Suite C
Annapolis, MD 21401
410.263.1200

THESE DRAWINGS, SPECIFICATIONS AND OTHER DOCUMENTS (COLLECTIVELY, "THE DOCUMENTS") INCLUDING WITHOUT LIMITATION ELECTRONIC VERSIONS THEREOF AND THE IDEAS, DESIGNS AND ARRANGEMENTS REPRESENTED THEREBY, ARE AND SHALL REMAIN THE PROPERTY OF MARTINEZ + JOHNSON ARCHITECTURE, P.C. AS DEFINED BY APPLICABLE CONTRACTUAL AGREEMENTS ("THE AGREEMENTS") AND AS PROTECTED BY THE COPYRIGHT STATUTES OF THE UNITED STATES. USE OF THE DOCUMENTS SHALL BE STRICTLY LIMITED TO THE PROJECT FOR WHICH THEY WERE PREPARED AND DEVELOPED ("THE PROJECT") PER THE TERMS OF THE AGREEMENTS. NO PART OF THE DOCUMENTS SHALL BE COPIED, DISCLOSED TO OTHERS, OR USED IN CONNECTION WITH ANY OTHER WORK OR PROJECT, OR BY ANY OTHER PERSONS FOR ANY PURPOSES, OTHER THAN THE COMPLETION OF THE PROJECT, WITHOUT THE SPECIFIC WRITTEN AUTHORIZATION OF MARTINEZ + JOHNSON ARCHITECTURE, P.C. THE DOWNLOADING, OPENING, OR VIEWING OF ELECTRONIC VERSIONS OF THE DOCUMENTS OR VISUAL CONTACT WITH ANY PRINTED FORM THEREOF SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.

7502

DATE:	No.:	ISSUE:
02.19.10	1	PERMIT SET
04.02.10	2	GMP CONTRACT SET
11.11.10	-	CONTRACT SET

DATE:	No.:	REVISION:

SHEET TITLE:
**FOODSERVICE -
PLUMBING ROUGH-IN
SCHEDULE**

FS-P5

KEY	ITEM	DESCRIPTION			
P 1	AREA FLOOR DRAINS	See Mechanical Plans for fixture specifications.			
P 2	FLOOR SINK	Drains from Items #1, #2, #5, #6, #7 & #9. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (7) 1-1/2", 3/4"	HT:	0" AFF	
P 3	SPARE NUMBER				
P 4	SPARE NUMBER				
P 5	22	MODULAR BAR DIE	Plumber to run water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #5, 3 comp. sink - 1/2" CW & 1/2" HW Item #10, Soda Gun - 1/2" CW Item #15, Hand Sink - 1/2" CW & 1/2" HW Item #20, Soda Gun - 1/2" CW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 6	FLOOR SINK	Drains from Items #15, #16, #17, & #19. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: 1-1/2", (2) 1-1/4", 3/4"	HT:	0" AFF	
P 7	40	FLOOR WATER RECEPTACLE	Coordinate tail piece diameter with plumbing contractor. Plumber to completely install unit as provided by the KEC.		
		DIRECT WASTE: 2"	HT:	-6" AFF	
P 8	35	SODA BAG -N- BOX	Plumber to BTC to booth units (VERIFY) Vendor supplied item. Softened water source is restricted.		
		SUPPLY: CW: 1/2"	HW:	HT:	12" AFF
P 9	FUNNEL FLOOR DRAIN	Drains from Item #38.1.			
		INDIRECT WASTE: 3/4"	HT:	4" AFF	
P 10	38.2	CONDENSING UNIT	*1/2" condensing water supply and 1/2" condensing water return, (from building cooling tower), w/ compression fittings & ball valves for servicing. Water Usage - Maximum GPM - 0.5. Water Pressure Drop - psi - 20.0		
		SUPPLY: CW: *	HW:	HT:	84" AFF
P 11	37	BEER LINE CHILLER	*3/8" condensing water supply and 3/8" condensing water return, (from building cooling tower), w/ compression fittings & ball valves for servicing. Water Usage - Maximum GPM - 0.5. Water Pressure Drop - psi - 20.0		
		SUPPLY: CW: **	HW:	HT:	84" AFF
		VERIFY			
P 12	37.1	BEER LINE CHILLER	*3/8" condensing water supply and 3/8" condensing water return, (from building cooling tower), w/ compression fittings & ball valves for servicing. Water Usage - Maximum GPM - 0.5. Water Pressure Drop - psi - 20.0		
		SUPPLY: CW: **	HW:	HT:	84" AFF
		VERIFY			
P 13	SPARE NUMBER				
P 14	SPARE NUMBER				
P 15	37.2	BEER LINE CHILLER	*3/8" condensing water supply and 3/8" condensing water return, (from building cooling tower), w/ compression fittings & ball valves for servicing. Water Usage - Maximum GPM - 0.5. Water Pressure Drop - psi - 20.0		
		SUPPLY: CW: **	HW:	HT:	84" AFF
		VERIFY			
P 16	37.3	BEER LINE CHILLER	*3/8" condensing water supply and 3/8" condensing water return, (from building cooling tower), w/ compression fittings & ball valves for servicing. Water Usage - Maximum GPM - 0.5. Water Pressure Drop - psi - 20.0		
		SUPPLY: CW: **	HW:	HT:	84" AFF
		VERIFY			
P 101	AREA FLOOR DRAINS	See Mechanical Plans for fixture specifications.			
P 102	109	THREE COMPARTMENT SINK	Drains to P105.		
		SUPPLY: CW: 1/2"	HW: 1/2"	HT:	12" AFF
		INDIRECT WASTE: (3) 1-1/2"	HT:	0" AFF	
P 103	SPARE NUMBER				
P 104	SPARE NUMBER				
P 105	FLOOR SINK	Drains from Items #108, #109, #110, #111, & #115. Provide w/ 3/4 section grate. Install flush or just below finished floor. * Drain size: (4) 1-1/2", (2) 1-1/4", 3/4"			
		INDIRECT WASTE: * See Note	HT:	0" AFF	
P 106	115	UNDERBAR HAND SINK UNIT	Drains to P105.		
		SUPPLY: CW: 1/2"	HW: 1/2"	HT:	12" AFF
		INDIRECT WASTE: 1-1/2"	HT:	0" AFF	
P 107	FLOOR SINK	Drains from Items #117, #118, & #120. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: 1-1/4", (2) 3/4"	HT:	0" AFF	
P 108	120.1	WATER FILTER ASSEMBLY	Plumber to BTC cold water connection thru to Item #120, (Ice Machine).		
		SUPPLY: CW: 1/2"	HW:	HT:	30" AFF

KEY	ITEM	DESCRIPTION			
P 109	FLOOR SINK	Drains from Items #121, #122, & #125. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (3) 1-1/2", (2) 1-1/4"	HT:	0" AFF	
P 110	152	MODULAR BAR DIE	Plumber to run water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #122, 3 comp. sink - 1/2" CW & 1/2" HW Item #135, Soda Gun - 1/2" CW Item #151, Hand Sink - 1/2" CW & 1/2" HW Item #147, Soda Gun - 1/2" CW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 111	FLOOR SINK	Drains from Items #129, #131, #136, & #137. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (3) 1-1/4", 3/4"	HT:	0" AFF	
P 112	FLOOR SINK	Drains from Items #139, #140, #141, #142, & #151. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (2) 1-1/4", 1-1/2", (2) 3/4"	HT:	0" AFF	
P 113	SPARE NUMBER				
P 114	SPARE NUMBER				
P 115	FLOOR SINK	Drains from Items #155, #156, & #157. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (3) 1-1/2", (2) 1-1/4"	HT:	0" AFF	
P 116	185	MODULAR BAR DIE	Plumber to run water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #156, 3 comp. sink - 1/2" CW & 1/2" HW Item #161, Soda Gun - 1/2" CW Item #182, Hand Sink - 1/2" CW & 1/2" HW Item #177, Soda Gun - 1/2" CW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 117	FLOOR SINK	Drains from Items #167 & #168. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: 1-1/4", 3/4"	HT:	0" AFF	
P 118	FLOOR SINK	Drains from Items #170, #171, #175, & #182. Plumber to run drain from item #182 tight to die wall as to not traverse trash chute area. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (2) 1-1/4", 1-1/2", 3/4"	HT:	0" AFF	
P 119	215	MODULAR BAR DIE	Plumber to run water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #187, Hand Sink - 1/2" CW & 1/2" HW Item #189, Soda Gun - 1/2" CW Item #205, Soda Gun - 1/2" CW Item #217, 3 comp. sink - 1/2" CW & 1/2" HW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 120	FLOOR SINK	Drains from Items #187, #192, #195, #198 & #199. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (2) 1-1/4", 1-1/2", (2) 3/4"	HT:	0" AFF	
P 121	FLOOR SINK	Drains from Items #201, #202, #207, & #209. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (3) 1-1/4", 3/4"	HT:	0" AFF	
P 122	FLOOR SINK	Drains from Items #216, #217, & #218. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (3) 1-1/2", (2) 1-1/4"	HT:	0" AFF	
P 123	SPARE NUMBER				
P 124	SPARE NUMBER				
P 300	AREA FLOOR DRAINS	See Mechanical Plans for fixture specifications.			
P 301	300	MODULAR BAR DIE	Plumber to run 3/4" water supply inside of MOD die wall & BTC thru to the following items as shown on plan: Item #306, Drop-In Hand Sink - 1/2" CW, & 1/2" HW Item #305, Dripperwell - 1/2" CW. Item #302, Espresso Maker - 1/2" CW. Plumber to Provide & Install shut-offs at location shown on plan. Drains from Items #302, #305 & #306. Provide w/ 3/4 section grate.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
		DIRECT WASTE: 1-1/2", 1-1/4", 3/8"	HT:	6" AFF	
P 302	OPEN SITE DRAIN	Plumber to run 2" waste line inside of MOD die wall & BTC thru to the following items as shown on plan: Drains from Item #302, #305 & #306.			
		INDIRECT WASTE: 1-1/2", 1-1/4", 3/8"	HT:	2" AFF	
P 303	SPARE NUMBER				
P 304	SPARE NUMBER				
P 305	OPEN SITE DRAIN	Plumber to run 2" waste line inside of MOD die wall & BTC thru to the following items as shown on plan: Drains from Item #311, #312, #315, #319, #321, #326, #327, #329, #330, #332, & #340.			
		INDIRECT WASTE: (4) 1-1/2", (5) 1-1/4", (4) 3/4"	HT:	2" AFF	

KEY	ITEM	DESCRIPTION			
P 306	313	MODULAR BAR DIE	Plumber to run 3/4" water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #312, 3 comp. sink - 1/2" CW & 1/2" HW Item #322, Soda Gun - 1/2" CW Item #336, Soda Gun - 1/2" CW Item #340, Hand Sink - 1/2" CW & 1/2" HW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 307	OPEN SITE DRAIN	Plumber to run 2" waste line inside of MOD die wall & BTC thru to the following items as shown on plan: Drains from Item #341, #342, #345, #349, #351, #356, #357, #359, #360, #362 & #370.			
		INDIRECT WASTE: (3) 1-1/2", (6) 1-1/4", (4) 3/4"	HT:	2" AFF	
P 308	371	MODULAR BAR DIE	Plumber to run water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #342, 3 comp. sink - 1/2" CW & 1/2" HW Item #355, Soda Gun - 1/2" CW Item #366, Soda Gun - 1/2" CW Item #370, Hand Sink - 1/2" CW & 1/2" HW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 309	OPEN SITE DRAIN	Plumber to run 2" waste line inside of MOD die wall & BTC thru to the following items as shown on plan: Drains from Item #372, #379, #381, #387, #388, #389 & #390.			
		INDIRECT WASTE: (4) 1-1/2", (3) 1-1/4", (2) 3/4"	HT:	2" AFF	
P 310	391	MODULAR BAR DIE	Plumber to run water lines inside of MOD die wall & BTC thru to the following items as shown on plan: Item #389, 3 comp. sink - 1/2" CW & 1/2" HW Item #385, Soda Gun - 1/2" CW Item #372, Hand Sink - 1/2" CW & 1/2" HW Plumber to Provide & Install shut-offs at location shown on plan.		
		SUPPLY: CW: 3/4"	HW: 3/4"	HT:	12" AFF
P 311	396.1	WATER FILTER ASSEMBLY	Plumber to BTC cold water connection thru to Item #396, (Ice Machine).		
		SUPPLY: CW: 3/4"	HW:	HT:	86" AFF
P 312	395	FLOOR WATER RECEPTACLE	Coordinate tail piece diameter with plumbing contractor. Plumber to completely install unit as provided by the KEC.		
		DIRECT WASTE: 2"	HT:	-6" AFF	
P 313	SPARE NUMBER				
P 314	SPARE NUMBER				
P 315	396	ICE MAKER, CUBE-STYLE	*1/2" condensing water supply and 3/8" condensing water return, (from building cooling tower). Drains to P316.		
		SUPPLY: CW: *	HW:	HT:	" AFF
		INDIRECT WASTE: 3/4", 3/8"	HT:	0" AFF	
P 316	FLOOR SINK	Drains from Items #396 & #397. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: 1", 3/4", 3/8"	HT:	0" AFF	
P 317	399	SODA BAG -N- BOX	(VERIFY) Vendor supplied item. Softened water source is restricted.		
		SUPPLY: CW: 1/2"	HW:	HT:	12" AFF
P 318	400	UNDERBAR HAND SINK UNIT	Drains to P320.		
		SUPPLY: CW: 1/2"	HW: 1/2"	HT:	12" AFF
		INDIRECT WASTE: 1-1/2"	HT:	0" AFF	
P 319	402	SODA GUN & CARBONATOR	(VERIFY) Vendor supplied item. Softened water source is restricted. Plumber to verify.		
		SUPPLY: CW: 1/2"	HW:	HT:	12" AFF
P 320	FLOOR SINK	Drains from Items #400, #407, #408 & #405. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: 1-1/2", 1-1/4", (2) 3/4"	HT:	0" AFF	
P 321	409	THREE COMPARTMENT SINK	Drains to P322.		
		SUPPLY: CW: 1/2"	HW: 1/2"	HT:	12" AFF
		INDIRECT WASTE: (3) 1-1/2"	HT:	0" AFF	
P 322	FLOOR SINK	Drains from Items #409, #410, #411 & #416. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (3) 1-1/2", 1-1/4", (2) 3/4"	HT:	0" AFF	
P 323	SPARE NUMBER				
P 324	SPARE NUMBER				
P 325	415	SODA GUN & CARBONATOR	(VERIFY) Vendor supplied item. Softened water source is restricted. Plumber to verify.		
		SUPPLY: CW: 1/2"	HW:	HT:	12" AFF
P 326	FLOOR SINK	Drains from Items #427, #429, #430 & #431. Provide w/ 3/4 section grate. Install flush or just below finished floor.			
		INDIRECT WASTE: (2) 1", (2) 1-1/2"	HT:	0" AFF	
P 327	430	DROP-IN HAND SINK	Drains to P326. *Plumber to run drain tight to back wall as to not traverse trash chute area.		
		SUPPLY: CW: 1/2"	HW: 1/2"	HT:	12" AFF
		INDIRECT WASTE: 1/1/2"	HT:	0" AFF	