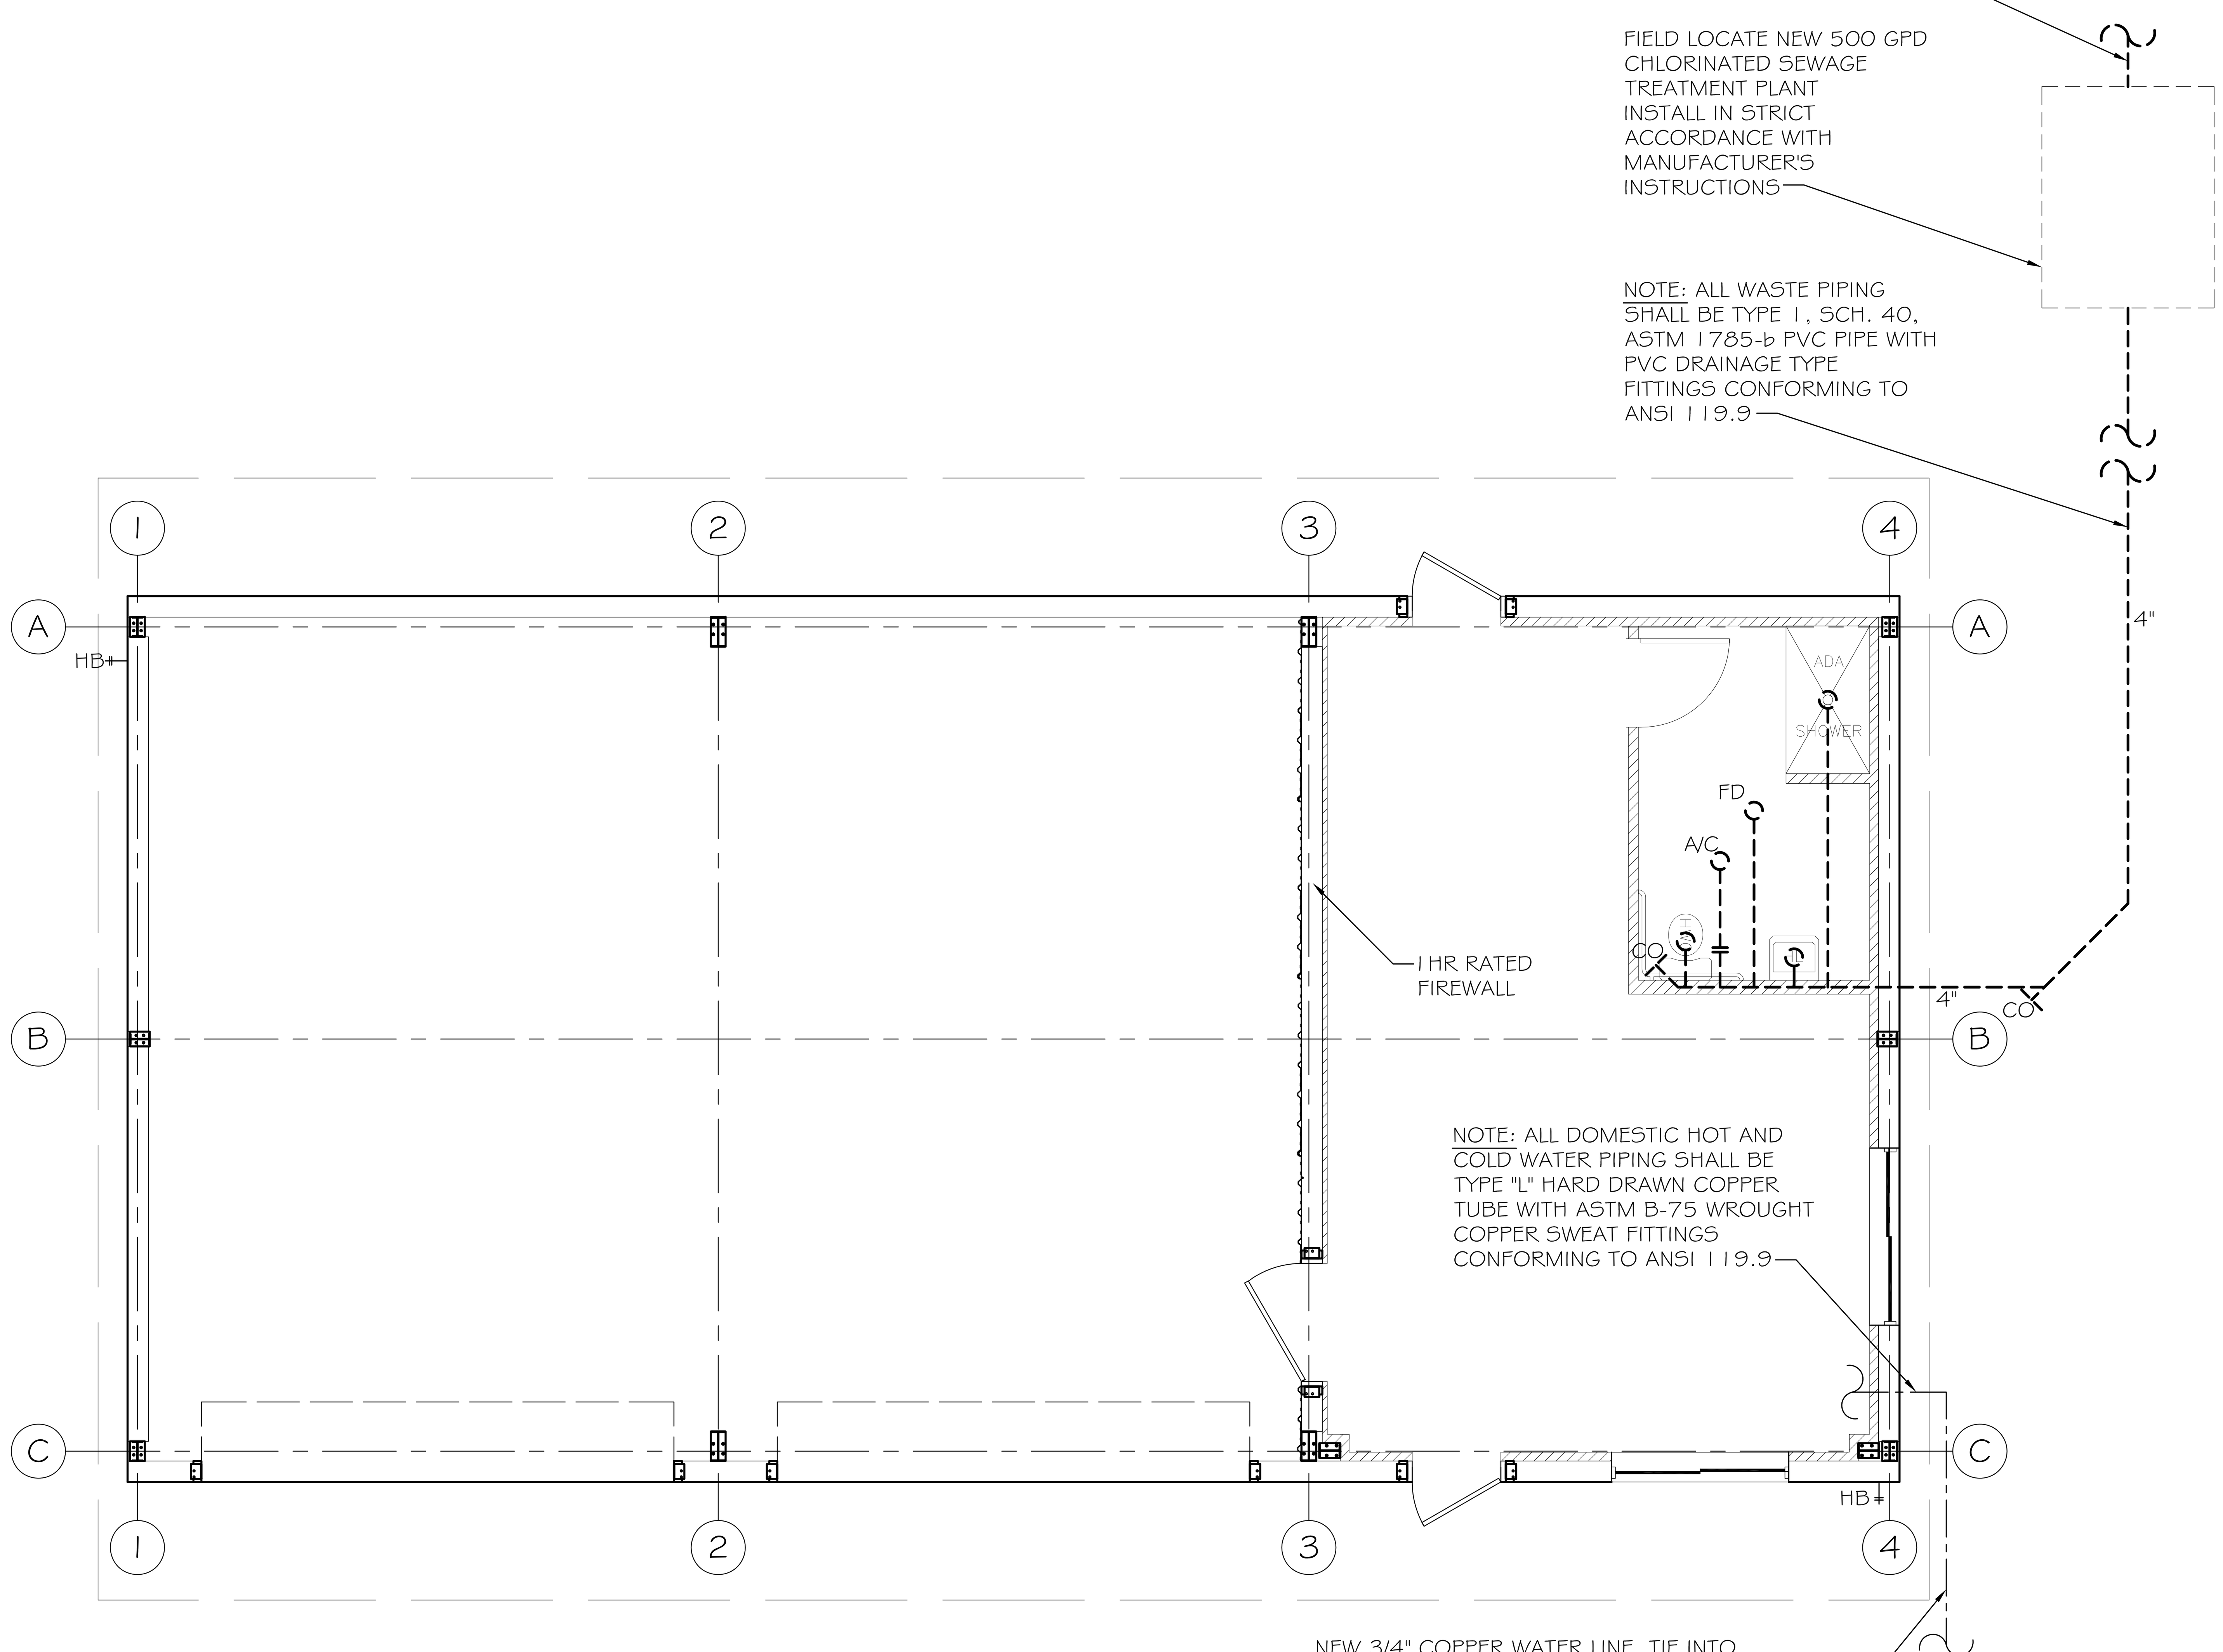

PLUMBING PLAN LEGEND

- - - - - - - - - SEWER LINE
— · — · — · — WATER LINE

PLUMBING PLAN

SCALE: 1/4" = 1'-0"

PLUMBING NOTES

1. PROVIDE ALL LABOR, MATERIAL AND EQUIPMENT FOR A COMPLETE OPERATING SYSTEM. THE SYSTEM SHALL INCLUDE HOT AND COLD WATER PIPING, SEWER AND VENT PIPING, INSULATION, WATER HEATER, HANGERS, VALVES, SUPPORTS WITHOUT ANY RESTRICTIONS TO COLUMN. CUT AND PATCH AS REQUIRED TO INSTALL PIPES.
2. ALL WORK AND MATERIAL SHALL CONFORM STRICTLY TO THE LATEST LOCAL, CITY, PARISH, STATE AND NATIONAL GOVERNING CODES.
3. CONTRACTOR IS TO FIELD VERIFY ALL EXISTING UTILITY LOCATIONS, ELEVATIONS AND SIZES PRIOR TO COMMENCING ANY WORK. CONTRACTOR SHALL PAY NECESSARY FEES FOR THE UTILITIES CONNECTIONS.
4. CONTRACTOR IS RESPONSIBLE TO VERIFY THE EXISTING INVERTS AND SET NEW INVERTS OF SEWERAGE AND DRAINAGE PIPES.
5. SEWERAGE LINES 3-INCH AND SMALLER SHALL BE SLOPED 1/4" PER FOOT AND LINE 4-INCH AND LARGER SHALL BE 1/8" PER FOOT.
6. TEST ALL PIPING AT REQUIRED PRESSURE.
7. ALL PLUMBING SHALL BE CLOSELY COORDINATED WITH STRUCTURAL SYSTEM, MECHANICAL SYSTEM AND ELECTRICAL TO INSURE NO TRADES WILL CONFLICT WITH EACH OTHER.
8. DO NOT SCALE DRAWINGS. SEE ARCHITECTURAL DRAWINGS FOR EXACT LOCATIONS OF DOORS, WINDOWS, WALLS, FIXTURES, ETC.
9. ALL WATER MAINS AND PIPING NOT SHOWN FOR CLARITY, ALL LOCATIONS FIELD VERIFIED.
10. ALL WATER PIPING AND FITTINGS ABOVE THE FLOOR SHALL BE INSULATED WITH 1/2" THICK FIBERGLASS INSULATION AND JACKET.
11. ALL ELECTRICAL, MECHANICAL AND PLUMBING PENETRATING FIRE PARTITIONS SHALL BE FIRE CAULKED. (PENETRATIONS THROUGH RATED CONSTRUCTION SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASES WHEN TESTED IN ACCORDANCE WITH ASTM-E814.)
12. ALL PLUMBING LINES SHOWN ARE DIAGRAMMATIC.

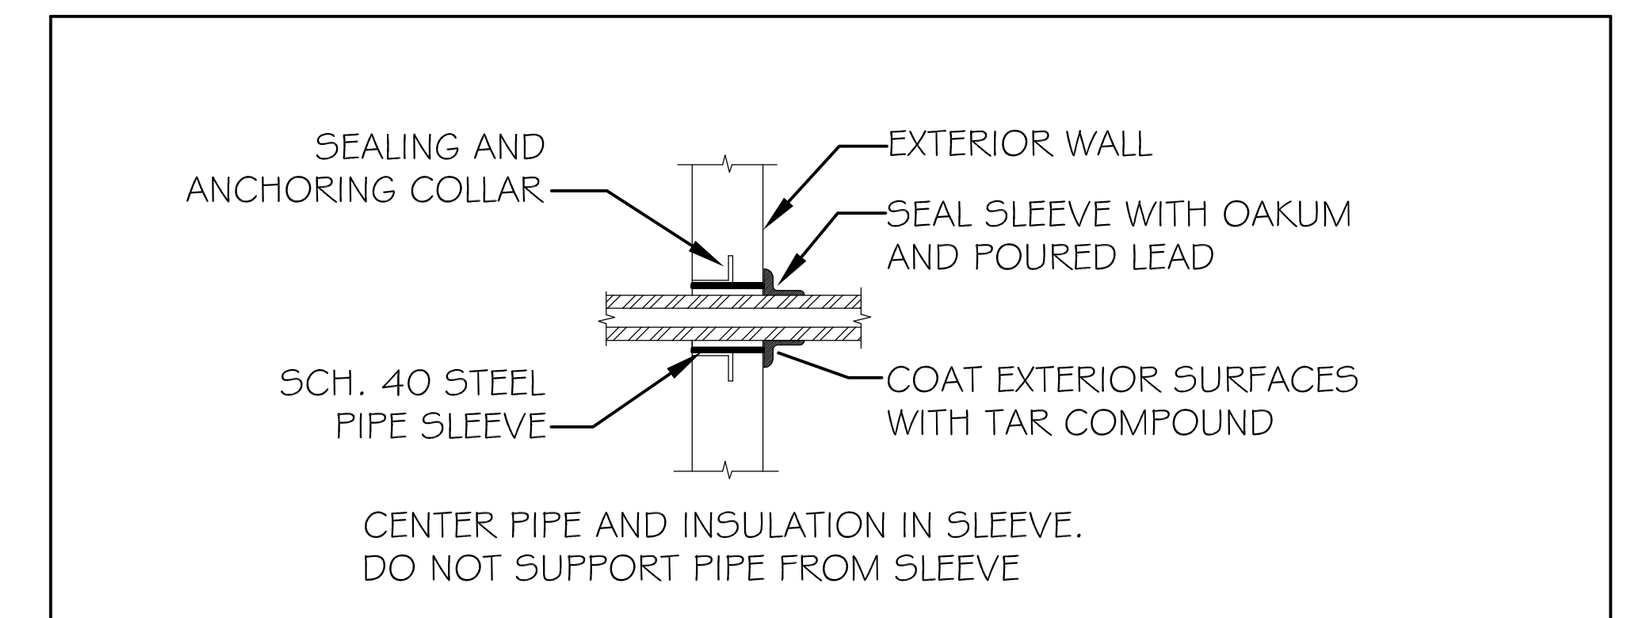

EXTERIOR WALL SLEEVE DETAIL

N.T.S.

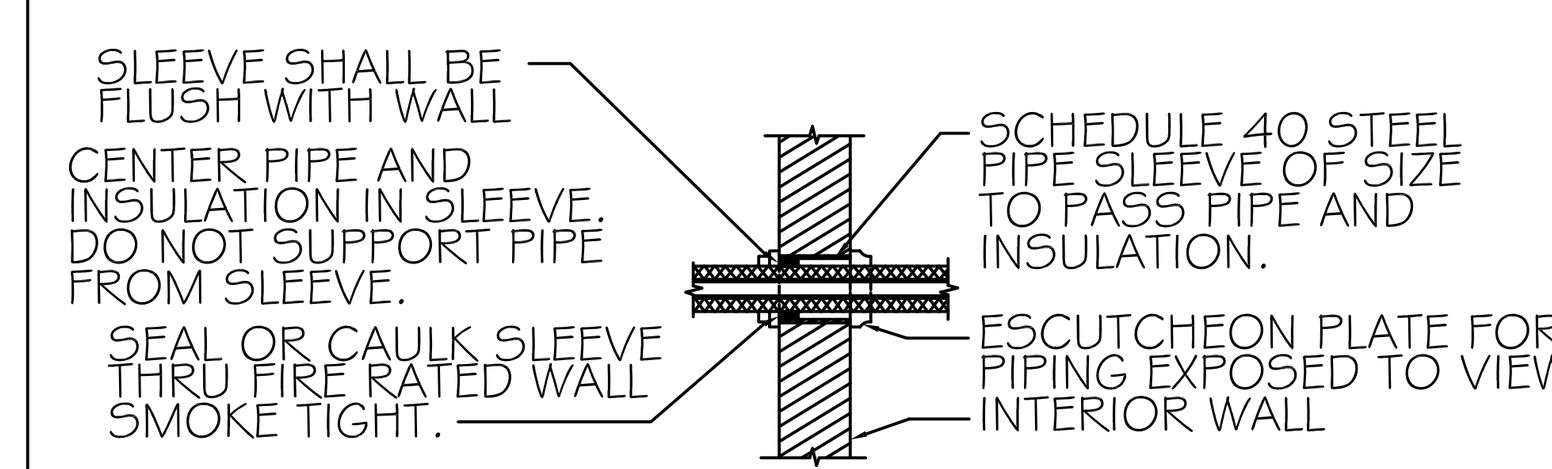

TYPICAL INTERIOR WALL SLEEVE DETAIL

N.T.S.

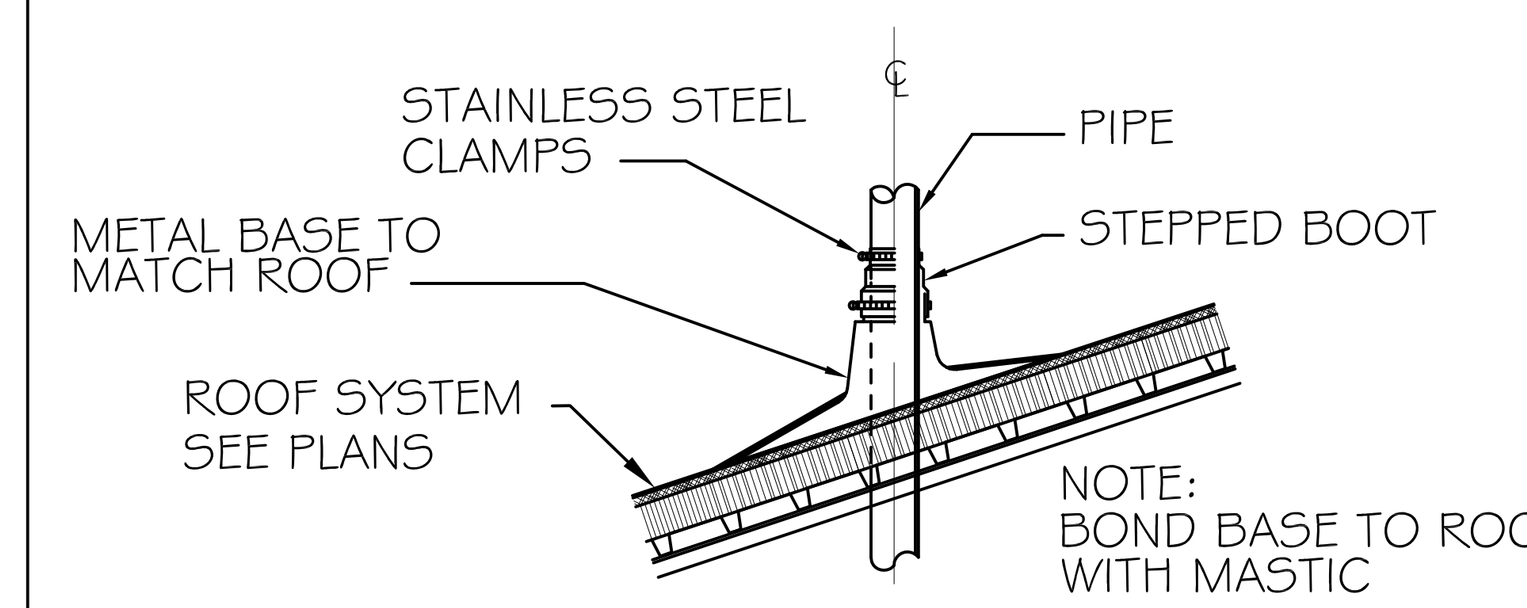

VENT THRU ROOF DETAIL

N.T.S.

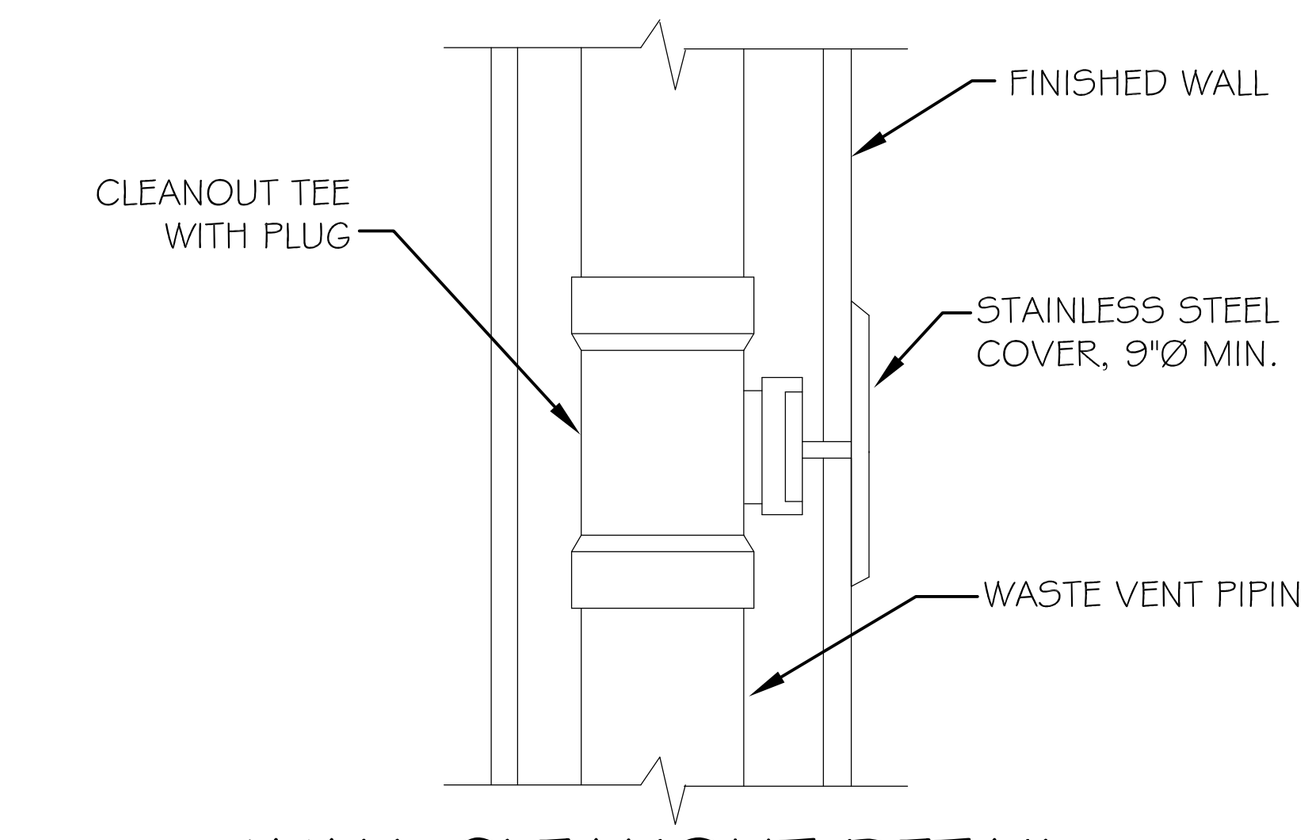

WALL CLEANOUT DETAIL

N.T.S.

PLUMBING FIXTURE SCHEDULE							
MARK	DESCRIPTION	TYPE	ROUGH-IN SIZES				NOTES
			WASTE	VENT	CW	HW	
WC	H.C. WATER CLOSET	TANK	4"	4"	1/2"	-	2, 3, 5
LAV	H.C. LAVATORY	WALL HUNG	2"	2"	1/2"	1/2"	1, 2, 3, 5
FD	FLOOR DRAIN	–	2"	2"	-	-	4, 5
WH	WATER HEATER DRAIN	–	-	2"	1/2"	1/2"	5
AHU	AHU DRAIN	–	1"	1"	-	-	5
SHW	SHOWER	–	2"	2"	1/2"	1/2"	5

FIXTURE NOTES:
1. INSULATE PIPING FOR HANDICAP FIXTURES.
2. PROVIDE CHAIR CARRIER FOR WALL HUNG FIXTURES.
3. H.C. - HANDICAP FIXTURE
4. INSTALL TRAP PRIMER ON ALL FLOOR DRAINS.
5. FIXTURES SELECTED BY OWNER.

NEW 500 GPD CHLORINATED TREATMENT PLANT

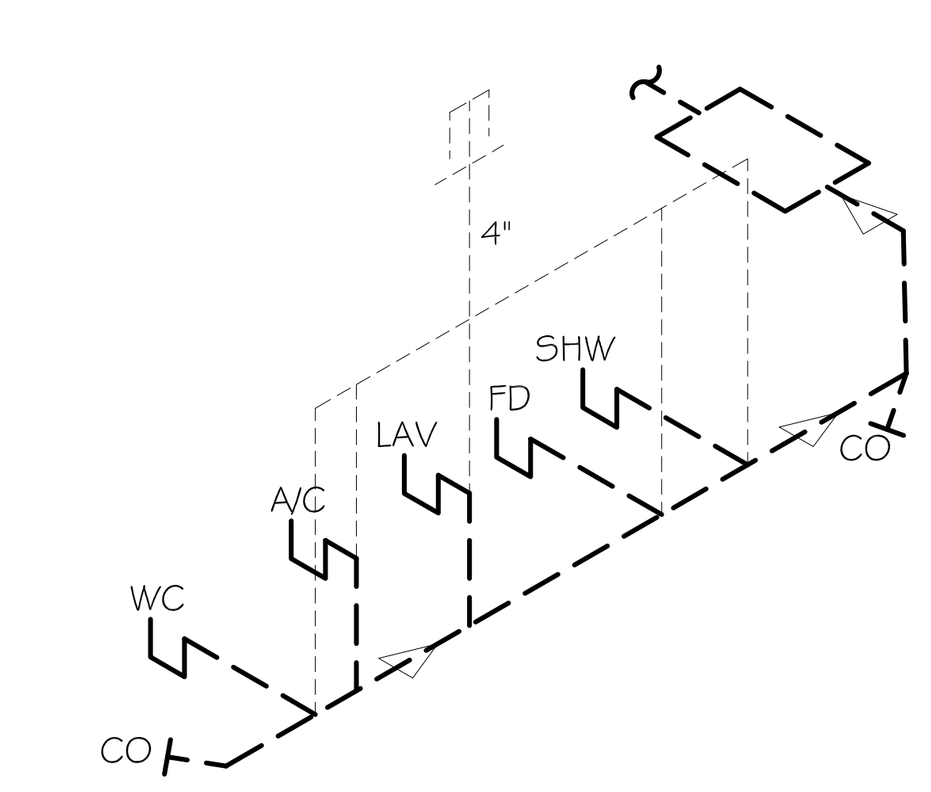

PLUMBING RISER DIAGRAM

N.T.S.

DAMMON ENGINEERING, INC.
Architects & Engineers
CHIEF ENGINEER: EMMETT DAMMON, P.E.
CHIEF ARCHITECT: ROBERT WILTSE
554 OLD SPANISH TRAIL
SLIDELL, LA 70458
dammonengineering.com
dammoneng@bellsouth.net
PHONE: 985-649-5832
FAX: 985-641-5950

U.S. FISH & WILDLIFE SERVICE NEW EQUIPMENT STORAGE BLDG.

UPPER OUACHITA NATIONAL WILDLIFE REFUGE
BASTROP, LA

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which they have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

JOB No:	2151	DATE:	10/02/12
DRAWN BY:	BSN	CHECKED BY:	BSN

REVISIONS		
#	DESCRIPTION	DATE

PLUMBING PLAN

SHEET No: 05 OF 05

P-1