



## Standard Specification for Poly(Methyl Methacrylate) Acrylic Plastic Sheet<sup>1</sup>

This standard is issued under the fixed designation D 4802; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope \*

1.1 This specification covers monolithic methacrylate sheets produced by various processes. For this specification, methacrylate sheet shall be composed of polymerized acrylic monomers of which at least 80 % shall be methyl methacrylate.

NOTE 1—This specification is intended to consolidate the requirements of the Cast Methacrylate Plastic Sheets portion of discontinued Fed. Spec. L-P-391D, discontinued Specification D 702. Cast Methacrylate Plastic Sheets, Rods, Tubes and Shapes, and discontinued Specification D 1547, Extruded Acrylic Plastic Sheet.

1.2 This specification is intended to cover acrylic sheet for general-purpose applications. For specialty applications consult the appropriate use standards.

1.3 The following safety hazards caveat pertains only to the test methods portion, Section 8, of this specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

1.4 Acrylic sheet is used frequently in applications in which extreme clarity, lack of optical distortion and absence of any foreign particulate matter are of primary significance. Reground material may be used as long as careful control is used to eliminate adverse effects on these properties. The use of recycled material in type B-1 and B-2 sheet, may have adverse effects on these properties which would preclude its use in most cases. The use of recycled or reground material is not possible for type A-1 and A-2 materials since the sheet is produced directly from monomer

NOTE 2—This standard is similar to ISO 7823-1:1987 (E) in title only. The technical content is significantly different.

### 2. Referenced Documents

#### 2.1 ASTM Standards:

D 256 Test Methods for Determining the Izod Pendulum Impact Resistance of Plastics<sup>2</sup>

D 542 Test Methods for Index of Refraction of Transparent Organic Plastic<sup>2</sup>

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee D20 on Plastics and is the direct responsibility of Subcommittee D20.15 on Thermoplastic Materials.

Current edition approved October 10, 2001. Published December 2001. Originally published as D 4802 – 88. Last previous edition D 4802 – 94.

<sup>2</sup> Annual Book of ASTM Standards, Vol 08.01.

D 570 Test Method for Water Absorption of Plastics<sup>2</sup>

D 638 Test Method for Tensile Properties of Plastics<sup>2</sup>

D 648 Test Method for Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position<sup>2</sup>

D 792 Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement<sup>2</sup>

D 883 Terminology Relating to Plastics<sup>2</sup>

D 1003 Test Method for Haze and Luminous Transmittance of Transparent Plastics<sup>2</sup>

D 1044 Test Method for Resistance of Transparent Plastics to Surface Abrasion<sup>2</sup>

D 1308 Test Method for Effect of Household Chemicals on Clear and Pigmented Organic Finishes<sup>3</sup>

D 2565 Practice for Xenon Arc Exposure of Plastics Intended for Outdoor Applications<sup>4</sup>

D 3002 Guide for Evaluation of Coatings Applied to Plastics<sup>3</sup>

D 3359 Test Method for Measuring Adhesion by Tape Test<sup>5</sup>

D 3892 Practice for Packaging/Packing of Plastics<sup>4</sup>

E 29 Practice for Using Significant Digits in Test Data to Determine Conformance with Specifications<sup>6</sup>

#### 2.2 ISO Standard:

ISO 7823-1:1987 (E) Plastics—Poly(Methyl Methacrylate) Sheets—Types, Dimensions, and Characteristics<sup>7</sup>

### 3. Terminology

#### 3.1 Definitions:

3.1.1 *General*—The definitions given in Terminology D 883 are applicable to this specification.

#### 3.2 Definitions of Terms Specific to This Standard:

3.2.1 *bow warp, n*—distortion in the form of a simple curve or arc extending across the sheet and displaced from the horizontal when the sheet is laying flat.

3.2.2 *edge kink warpage, n*—distortion in the form of a twist, wrinkle, or scallop occurring along the perimeter of the sheet.

3.2.3 *“S” warp, n*—distortion in the form of a compound curve or “S” shape caused by a nonuniform change in internal stresses.

<sup>3</sup> Annual Book of ASTM Standards, Vol 06.02.

<sup>4</sup> Annual Book of ASTM Standards, Vol 08.02.

<sup>5</sup> Annual Book of ASTM Standards, Vol 06.01.

<sup>6</sup> Annual Book of ASTM Standards, Vol 14.02.

<sup>7</sup> Available from American National Standards Institute, 25 W. 43rd St., 4th Floor, New York, NY 10036.

\*A Summary of Changes section appears at the end of this standard.

## 4. Classification

### 4.1 Categories:

4.1.1 *Category A-1*—Methacrylate sheet typically manufactured by the cell-casting process. This category represents the best optical-quality sheet. It is characterized by the highest long-term design stress and the highest degree of chemical resistance found in methacrylate sheet.

4.1.2 *Category A-2*—Methacrylate sheet typically manufactured by the continuous-casting method. The physical, chemical, and thermal properties are similar to Category A-1 sheet. The optical quality is lower than Category A-1 sheet. This category has better thickness control than that of Category A-1 sheet.

4.1.3 *Category B-1*—Methacrylate sheet manufactured by any of several processes (typically described as continuously manufactured sheet). This sheet possesses lower heat, chemical, and stress-craze resistance than Category A-1 and Category A-2 sheet. It has equivalent or better optical quality and thickness tolerances than Category A-2 sheet.

4.1.4 *Category B-2*—Methacrylate sheet typically manufactured by conventional extrusion processes. This sheet is characterized by excellent thickness control similar to Category A-2 and Category B-1 sheet. This sheet has reduced long-term design stress, chemical resistance, optical quality, and thermal stability.

4.2 *Finish*—The following finishes of methacrylate sheet may be specified. The physical and optical properties in this specification are based on Finish 1 material unless otherwise noted.

4.2.1 *Finish 1*—Smooth or polished.

4.2.2 *Finish 2*—Patterned, including textures and frosting.

4.2.3 *Finish 3*—Abrasion-resistant coated.

4.2.3.1 Finish 3 material can be of any category provided it meets the requirements of that category plus the additional requirements listed in Table 1.

4.2.4 *Type UVF (UV-Filtering)*—Materials that contain an ultraviolet absorber to limit the transmission of UV radiation through the sheet especially for protection of items sensitive to sunlight or UV radiation.

4.2.5 *Type UVT (UV-Transmitting)*—Materials that do not contain any UV absorbers and are used where there is a need to transmit a greater portion of UV radiation.

4.2.6 For general-purpose applications neither type need be specified. If not specified, materials will usually contain UV absorbers only sufficient to protect the polymer from degradation from exposure to direct sunlight or UV radiation. There are no specific UV-transmission requirements for material of unspecified type.

## 5. Detail Requirements

5.1 The following applies to all specified limits in this specification. For purposes of determining conformance with this specification, an observed value or a calculated value shall be rounded to the nearest 1 MPa (100 psi) for tensile strength, and for all other properties shall be rounded to the nearest unit in the last righthand place of digits used in expressing the limiting value, in accordance with the rounding method of Practice E 29.

5.2 Sheet shall conform to the requirements prescribed in Table 2. In addition, Category A-1 sheet shall conform to the permissible-thickness variations listed in Table 3.

5.3 *Shrinkage*—Test in accordance with 8.1.7.

5.4 *Thermal Stability*—Sheet shall show no evidence of bubbling or blistering when tested in accordance with 8.1.8.

5.5 *Abrasion-Resistant Material*—Finish 3 material (abrasion-resistant coated material) shall meet the requirements of the substrate material it is designated as and the properties shown in Table 1.

5.6 *Workmanship*—Sheet, as delivered, shall be free from warpage, cracks, scratches, blisters, voids, foreign matter, die lines, and other defects that may affect appearance or serviceability.

5.6.1 *Flatness of Sheet*—Sheet shall be free from edge kink warpage and from edge “S” warp when lying on a flat surface. Overall bow warp is permitted for all types of sheet to a maximum of 6.3 mm (0.250 in.) displacement from the horizontal for each 4-ft length, or fraction thereof, of a sheet under its own weight when laying in the horizontal position on a flat continuous surface. “S” warp that disappears or becomes bow warp when turned over is permitted.

5.6.2 *Chips and Dirt in Sheet:*

5.6.2.1 *Chips in Sheet of Thickness Equal to or Less Than 51 mm (2.008 in.)*—The maximum permissible chip size shall be 3.2 mm (0.125 in.). Chips that are approximately the maximum permissible size shall not have a frequency greater than 1 chip per 0.4 m<sup>2</sup> (4.3 ft<sup>2</sup>) of sheet area. Chips less than 0.8 mm (0.031 in.) are to be disregarded unless they form a concentrated pattern that may affect serviceability. Chips from 0.8 mm (0.031 in.) to the maximum permissible size shall not have a frequency greater than 1 per 0.4 m<sup>2</sup> (4.3 ft<sup>2</sup>). Chips out of tolerance in size may be knifed off and considered acceptable if the remaining blemish can be removed by polishing, except for Finish 3 sheet which cannot be easily polished. For Finish 3 sheet, the maximum permissible chip size shall be 4.75 mm (0.187 in.); all other requirements above apply except as noted.

5.6.2.2 *Chips in Sheet of Thicknesses Greater Than 51 mm (2.008 in.)*—Chips may be accepted providing they do not extend more than 0.4 mm (0.016 in.) above the surface.

5.6.2.3 *Dirt and Contaminants*—The maximum permissible dirt and contamination dimension shall be 3.2 mm (0.125 in.). Dirt and contaminants less than 0.8 mm (0.031 in.) shall be disregarded unless they form a concentrated pattern that may affect the serviceability of the sheet. The maximum permissible frequency for dimensions ranging from 0.8 mm (0.031 in.) to the maximum permissible for each type of sheet shall be 1 per 0.4 m<sup>2</sup> (4.3 ft<sup>2</sup>) of sheet area for thickness up to and including

**TABLE 1 Finish 3 Abrasion Resistant Material**

Property	Test Method	Requirement
Abrasion resistance, 100 cycles at 500 g load	D 1044	
Haze, max, %		4.0
Coating adhesion, percent retention, min	see 8.1.14	Minimum Classification 4B, Fig. 1, Test Methods D 3359
Chemical resistance, visual examination	D1308	no change

**TABLE 2 Detail Requirements for Cast Methacrylate Plastic Sheets**

Property	Test Method	Category			
		A-1	A-2	B-1	B-2
Tensile strength, min, MPa (psi)	D 638	62 (9.0 k)	62 (9.0 k)	62 (9.0 k)	62 (9.0 k)
Elongation at break, min, %	D 638	2	2	2	2 <sup>A</sup>
Index of refraction	D 542				
min:		1.48	1.48	1.48	1.48 <sup>A</sup>
max:		1.50	1.50	1.50	1.50
Specific gravity	D 792				
min:		1.18	1.18	1.18	1.18 <sup>A</sup>
max:		1.20	1.20	1.20	1.20
Luminous transmittance, min, %	D 1003				
<4.5 mm (0.177 in.)		91	91	91	91
>4.5 mm (0.177 in.) ≤32 mm (1.259 in.)		89	89	89	89
>32.0 mm (1.259 in.) ≤ 51.0 mm (2.000 in.)		87	87	87	87
Spectral transmittance, max, %	see 8.1.12				
Type UVF only 200 to 400 nm (6.0 mm, 0.236 in.)		5	5	5	5
Type UVT only 290 to 400 nm (3.0 mm, 0.118 in.)					
@290 nm		40	40	40	40
@310 nm		70	70	70	70
@340 nm		85	85	85	85
@400 nm		86	86	86	86
Haze, max,%	D 1003	3	3	3	3
Dimensional tolerance, max:					
Thickness, %		see Table 3	±10	±5	±5
Length and width, mm (in.)		-0.0, + 6.4 (-0.0, + 0.250)	-0.0, + 6.4 (-0.0, + 0.250)	-0.0, + 6.4 (-0.0, + 0.250)	-0.0, + 6.4 (-0.0, + 0.250)
Shrinkage, max, %	see 8.1.7	2.8	2.8	...	...
Transverse:		...	...	0.0	5.0
Machine:		...	...	3.0	8.0
Water absorption, %	D 570 (24-h method)		see Fig. 1 Fig. 1	...	<sup>A</sup>
Deflection temperature under flexural load, 1820 kPa (264 psi), °C (°F), min	D 648				
<12.0 mm (0.472 in.)		87 (188.6)	87 (188.6)	87 (188.6)	87 (188.6)
>12.0 mm (0.472 in.) ≤24.0 mm (0.944 in.)		88 (190.4)	88 (190.4)	88 (190.4)	N/A <sup>B</sup>
>24.0 mm (0.944 in.) ≤100 mm (3.937 in.)		93 (199.4)	93 (199.4)	N/A <sup>B</sup>	N/A <sup>B</sup>
Thermal stability		see 8.1.8.1	see 8.1.8.1	see 8.1.8.2	see 8.1.8.2
Impact strength, Izod, J/m (ft-lb/in.), min	D 256, Method A	16.0 (0.3)	16.0 (0.3)	16.0 (0.3)	16.0 (0.3) <sup>A</sup>

<sup>A</sup> For Category B-2 sheet only, properties noted may be determined on the resin from which the sheet is extruded.

<sup>B</sup> Not applicable.

12.0 mm (0.472 in.). For Finish 3 sheet the maximum permissible dimension for dirt and contaminants shall be 4.8 mm (0.187 in.); all other requirements above apply.

**5.6.2.4 Other Defects**—Minor defects, such as mold or handling scratches, or die lines that can be removed by polishing, shall be permitted provided these are not objectionable individually or in group patterns. Excluding side letgoes for masked and unmasked sheets in thicknesses greater than 51 mm (2.004 in.) and for unmasked sheets that are thicker than 6.0 mm (0.236 in.) up to and including 51 mm (2.004 in.), defects within 25 mm (0.984 in.) of the untrimmed edge of the sheet, that do not significantly reduce mechanical strength of the sheet, shall be permitted. Side letgoes for sheets thicker than 51 mm (2.004 in.) may exist providing they do not extend more than 0.4 mm (0.016 in.) below the surface. Side letgoes for unmasked sheets thicker than 6.0 mm (0.236 in.) up to and including 51 mm (2.004 in.) shall be allowed within a 50 mm (1.97 in.) band from the untrimmed edge of the sheet. For Finish 3 sheet, the maximum permissible length for mold scratches shall be 25 mm (0.984 in.); the maximum permissible length for medium or heavy handling scratches or abrasions

shall be 50 mm (1.97 in.); the maximum permissible length of light-handling scratches or abrasions shall be 153 mm (6.024 in.); and scratches or abrasions less than 6 mm shall be disregarded unless they form a concentrated pattern that may affect the serviceability of the sheet. For Finish 3 sheet, the maximum permissible frequency for allowable scratches and abrasions as defined above shall be one per 0.4 m<sup>2</sup> (4.3 ft<sup>2</sup>) of sheet area.

## 6. Sampling

6.1 Unless otherwise indicated in Section 8 or Table 2, select a sample from a sheet 3.0 mm thick sufficient to determine conformance of the material to this specification.

NOTE 3—When 6.0-mm-thickness sheet is not available for sampling for spectral-transmittance measurement, other thicknesses may be used for sampling with adjustment of the values found to 6.0-mm thickness. Sheet thicker than 3.0 mm may be selected when agreed upon between the purchaser and the manufacturer. In that case, it may be necessary to machine test specimens to 3.2-mm thickness, which is required for some tests.

**TABLE 3 Permissible Thickness Variations for Category C-1 Cast Methacrylate Plastic Sheets**

Nominal Thickness, mm (in.) <sup>A</sup>	Permissible Thickness Variation, mm (in.)		
	Size 1 <sup>B</sup>	Size 2 <sup>C</sup>	Size 3 <sup>D</sup>
0.75 (0.030)	+0.178 (0.007) <sup>E</sup> -0.229 (0.009)	NA <sup>F</sup>	NA <sup>F</sup>
1.0 (0.039)	+0.152 (0.006) <sup>E</sup> -0.254 (0.010)	NA <sup>F</sup>	NA <sup>F</sup>
1.25 (0.049)	+0.152 (0.006) <sup>E</sup> -0.254 (0.010)	NA <sup>F</sup>	NA <sup>F</sup>
1.5 (0.059)	+0.381 (0.015) -0.483 (0.019)	+0.610 (0.024) -0.686 (0.027)	NA <sup>F</sup>
2.0 (0.079)	+0.356 (0.014) -0.508 (0.020)	+0.559 (0.022) -0.711 (0.028)	NA <sup>F</sup>
2.5 (0.098)	+0.330 (0.013) -0.533 (0.021)	+0.533 (0.021) -0.737 (0.029)	NA <sup>F</sup>
2.5 (0.100)	+0.330 (0.013) -0.533 (0.021)	+0.533 (0.021) -0.737 (0.029)	NA <sup>F</sup>
3.0 (0.118)	+0.381 (0.015) -0.635 (0.025)	+0.508 (0.020) -0.762 (0.030)	+0.508 (0.030) -1.02 (0.040)
3.2 (0.125)	+0.381 (0.015) -0.635 (0.025)	+0.508 (0.020) -0.762 (0.030)	+0.508 (0.030) -1.02 (0.040)
3.8 (0.150)	+0.406 (0.016) -0.762 (0.030)	+0.559 (0.022) -0.914 (0.036)	+0.737 (0.029) -1.27 (0.050)
4.0 (0.157)	+0.406 (0.016) -0.762 (0.030)	+0.559 (0.022) -0.914 (0.036)	+0.737 (0.029) -1.27 (0.050)
4.5 (0.177)	+0.432 (0.017) -0.838 (0.033)	+0.559 (0.022) -0.965 (0.038)	+0.686 (0.027) -1.09 (0.043)
4.8 (0.187)	+0.432 (0.017) -0.838 (0.033)	+0.559 (0.022) -0.965 (0.038)	+0.686 (0.027) -1.09 (0.043)
5.5 (0.217)	+0.508 (0.020) -1.02 (0.040)	+0.635 (0.025) -1.14 (0.045)	+0.737 (0.029) -1.27 (0.050)
5.56 (0.220)	+0.508 (0.020) -1.02 (0.040)	+0.635 (0.025) -1.14 (0.045)	+0.737 (0.029) -1.27 (0.050)
6.0 (0.236)	+0.508 (0.020) -1.02 (0.040)	+0.635 (0.025) -1.14 (0.045)	+0.508 (0.030) -1.27 (0.050)
6.4 (0.250)	+0.508 (0.020) -1.02 (0.040)	+0.635 (0.025) -1.14 (0.045)	+0.737 (0.029) -1.27 (0.050)
7.9 (0.312)	+0.559 (0.022) -1.22 (0.048)	+0.686 (0.027) -1.35 (0.053)	+0.813 (0.032) -1.47 (0.058)
8.0 (0.315)	+0.559 (0.022) -1.22 (0.048)	+0.686 (0.027) -1.35 (0.053)	+0.813 (0.032) -1.47 (0.058)
9.0 (0.354)	+0.635 (0.025) -1.40 (0.055)	+0.762 (0.030) -1.52 (0.060)	+0.889 (0.035) -1.65 (0.065)
9.5 (0.375)	+0.635 (0.025) -1.65 (0.065)	+0.762 (0.030) -1.78 (0.070)	+0.889 (0.035) -1.91 (0.075)
12.0 (0.472)	+0.635 (0.025) -1.65 (0.065)	+0.762 (0.030) -1.78 (0.070)	+0.889 (0.035) -1.91 (0.075)
12.7 (0.500)	+0.635 (0.025) -1.65 (0.065)	+0.762 (0.030) -1.78 (0.070)	+0.889 (0.035) -1.91 (0.075)
15.0 (0.591)	+0.737 (0.029) -1.80 (0.071)	+0.737 (0.029) -1.80 (0.071)	+0.864 (0.034) -1.93 (0.076)
15.9 (0.625)	+0.838 (0.033) -1.96 (0.077)	+0.838 (0.033) -1.96 (0.077)	+0.965 (0.038) -2.08 (0.082)
16.0 (0.630)	+0.838 (0.033) -1.96 (0.077)	+0.838 (0.033) -1.96 (0.077)	+0.965 (0.038) -2.08 (0.082)
18.0 (0.709)	+0.762 (0.030) -2.03 (0.080)	+0.762 (0.030) -2.03 (0.080)	+1.02 (0.040) -2.29 (0.090)
19.0 (0.750)	+0.762 (0.030) -2.03 (0.080)	+0.762 (0.030) -2.03 (0.080)	+1.02 (0.040) -2.29 (0.090)
22.0 (0.866)	+0.660 (0.026) -2.13 (0.084)	+0.660 (0.026) -2.13 (0.084)	+1.17 (0.046) -2.64 (0.104)
24.0 (0.945)	+0.584 (0.023) -2.21 (0.087)	+0.584 (0.023) -2.21 (0.087)	+1.22 (0.048) -2.84 (0.112)
25.4 (1.00)	+0.584 (0.023) -2.21 (0.087)	+0.584 (0.023) -2.21 (0.087)	+1.22 (0.048) -2.84 (0.112)
31.8 (1.250)	+1.32 (0.052) -2.39 (0.094)	+1.32 (0.052) -2.39 (0.094)	+1.32 (0.052) -2.39 (0.094)
32.0 (1.280)	+1.32 (0.052) -2.39 (0.094)	+1.32 (0.052) -2.39 (0.094)	+1.32 (0.052) -2.39 (0.094)
38.0 (1.496)	+1.00 (0.039) -3.07 (0.021)	+1.00 (0.039) -3.07 (0.121)	+1.96 (0.077) -4.04 (0.159)
44.0 (1.732)	+1.24 (0.049) -3.48 (0.137)	+1.24 (0.049) -3.48 (0.137)	+2.34 (0.092) -4.57 (0.180)
44.4 (1.750)	+1.24 (0.049) -3.48 (0.137)	+1.24 (0.049) -3.48 (0.137)	+2.34 (0.092) -4.57 (0.180)

Nominal Thickness, mm (in.) <sup>A</sup>	Permissible Thickness Variation, mm (in.)		
	Size 1 <sup>B</sup>	Size 2 <sup>C</sup>	Size 3 <sup>D</sup>
50.8 (2.000)	+1.47 (0.058) -3.86 (0.152)	+1.47 (0.058) -3.86 (0.152)	+2.74 (0.108) -5.13 (0.202)
51.0 (2.008)	+1.47 (0.058) -3.86 (0.152)	+1.47 (0.058) -3.86 (0.152)	+2.74 (0.108) -5.13 (0.202)
57.0 (2.244)	+1.78 (0.070) -4.22 (0.166)	+1.78 (0.070) -4.22 (0.166)	NA <sup>F</sup>
64.0 (2.520)	+2.01 (0.079) -4.60 (0.081)	+2.01 (0.079) -4.60 (0.181)	NA <sup>F</sup>
70.0 (2.756)	+2.34 (0.092) -4.93 (0.194)	+2.34 (0.092) -4.93 (0.194)	NA <sup>F</sup>
76.0 (2.992)	+2.59 (0.102) -5.28 (0.208)	+2.59 (0.102) -5.28 (0.208)	NA <sup>F</sup>
80.0 (3.150)	+2.89 (0.114) -5.64 (0.222)	+2.89 (0.114) -5.64 (0.222)	NA <sup>F</sup>
90.0 (3.543)	+3.07 (0.121) -6.07 (0.239)	+3.07 (0.121) -6.07 (0.239)	NA <sup>F</sup>
95.0 (3.740)	+3.40 (0.134) -6.40 (0.252)	+3.40 (0.134) -6.40 (0.252)	NA <sup>F</sup>
100.0 (3.937)	+3.61 (0.142) -6.81 (0.268)	+3.61 (0.142) -6.81 (0.268)	NA <sup>F</sup>

<sup>A</sup> Thickness of unshrunk sheet will increase approximately 4 % when it is heated at thermoforming temperatures.

<sup>B</sup> Sizes up to and including 91 by 152 cm (36 by 60 in.) and 102 by 127 cm (40 by 50 in.).

<sup>C</sup> Sizes by larger than Size 1, up to and including 122 by 234 cm (48 by 84 in.), 135 by 203 cm (53 by 80 in.), and 152 by 183 cm (60 by 72 in.).

<sup>D</sup> Sizes larger than Size 2, up to and including 170 by 259 cm (67 by 102 in.) and 183 by 244 cm (72 by 96 in.).

<sup>E</sup> For colorless sheet only, tolerances shall be 0.356 mm (+ 0.014 in.), 0.229 mm (-0.009 in.) for 0.762-mm (0.030-in.) thickness and 0.330 mm (+ 0.013 in.), 0.432 mm (-0.017 in.) for 1.02 mm (0.040 in.) and 1.27-mm (0.050-in.) thicknesses.

<sup>F</sup> Not applicable.

## 7. Number of Tests

7.1 Perform the number of tests indicated in each test method in Section 8. All of the tests listed in Section 8 shall be used to establish conformity of a material to this specification. The average result for the specimens tested shall conform to the requirements prescribed in this specification. It is recommended that routine inspection be limited to the following:

7.1.1 Thickness and dimensions,

7.1.2 Appearance, and

7.1.3 Deflection temperature.

## 8. Test Methods

8.1 Determine the properties enumerated in this specification in accordance with the following test methods. All test specimens are to be prepared from sheet as received unless stated otherwise in the specific test method, except that for Category B-2 sheet, the properties listed in Table 2 may be determined in the resin from which the sheet is extruded.

8.1.1 *Test Conditions*—Conduct the test in the standard laboratory atmosphere of 23 ± 2.0°C (73.4 ± 1.8°F) and 50 ± 5 % relative humidity, unless otherwise specified in the test methods or in this specification.

8.1.2 *Index of Refraction*—Test in accordance with Test Methods D 542 using the Refractometric Method.

8.1.3 *Specific Gravity*—Test in accordance with Method A of Test Methods D 792.

8.1.4 *Luminous Transmittance*—For colorless material measure the light transmittance in accordance with Test Method D 1003. The test specimens must be taken from the material as received.

8.1.5 *Haze*—Test in accordance with Test Method D 1003, except that the test specimens shall have a thickness not over 12.7 mm (0.500 in.). Measure haze on colorless material only. The test specimens must be taken from the material as received.

8.1.6 *Water-Absorption*—Test in accordance with Test Method D 570 using the 24-h immersion procedure. Before testing, condition the test specimens for 24 h at 50 ± 3°C (122 ± 5.4°F).

8.1.7 *Shrinkage*:

8.1.7.1 *Procedure A*—For Category A-1 and A-2 materials, test two specimens, each 300 by 300 mm (11.81 by 11.81 in.). On each specimen, mark two fine lines at right angles to each other entirely across the specimen from the midpoints of opposite edges. Place fine gage marks across each of these lines and 50 ± 2.5 mm (1.97 ± 0.1 in.) from the edge of the specimen. Measure the distance between each pair of gage marks to the nearest 0.25 mm. Suspend each specimen from outside the gage marks at one end in a circulating-air oven at 160 ± 10°C (320 ± 18°F) for the length of time specified in the following schedule (see Note 4):

Nominal Thickness, mm (in.)	Heating Time, min
6.0 (0.236) or less	16
9.00 (0.354)	25
12.0 (0.472)	33
18.0 (0.708)	55
24.0 (0.944)	79
38.0 (1.500)	136
51.0 (2.000)	203
55.0 (2.165) and greater	240

After removal from the oven, allow the specimens to cool to 23 ± 1.0°C (73.4 ± 1.8°F), while in the suspended position. Remeasure the distance between each pair of gage marks and calculate the shrinkage as the percent change in distance between gage marks, based on the original distance, as follows:

$$\% \text{ shrinkage} = [(d_1 - d_2)/d_1] \cdot 100 \quad (1)$$

where:

- $d_1$  = original distance, and
- $d_2$  = distance after thermal conditioning.

NOTE 4—For thicknesses falling between those specified, use the heating time for the next higher thickness.

8.1.7.2 *Procedure B*—For Category B-1 and B-2 materials, select three 150 by 150 mm (6 by 6 in.) areas, one near the center area of the sheet. At the approximate center of each area, scribe a line parallel to the machine direction, and a line at 90° to this, to indicate the transverse direction of the sheet. At the point of intersection of the lines, scribe a 125 mm (5 in.) diameter circle. Mark the scribed diameters for identification as machine or transverse direction. Cut the 150 by 150 mm (6 by 6 in.) specimens out of the sheet. Hang the specimens in a circulating-air oven maintained at 50 ± 6°C (122 ± 10°F) for a period of time equal to 2 h for each 0.25 mm (0.01 in.) of sheet thickness (see Note 5). Without cooling, lay the specimens horizontally on a piece of preheated plate glass sprinkled with talcum powder and place in a circulating air oven maintained at 160 ± 10°C (320 ± 18°F). Preheat the plate glass to the test temperature in the oven for at least 15 min before laying the specimens on it. Heat the specimens for the

period of time prescribed in the following schedule:

Nominal Thickness, mm (in.)	Heating Period, min
3.0 (0.118) or thinner	15
Over 3.0 (0.118)	30

Remove the plate glass with the specimens from the oven and cool to room temperature in still air. Measure the diameters scribed on the specimen in the machine direction and in the transverse direction. Report the average change in length in each direction as a percent of the original diameter, as follows:

$$\% \text{ shrinkage} = [(l_1 - l_2)/l_1] \cdot 100 \quad (2)$$

where:

- $l_1$  = original length, and
- $l_2$  = average length after thermal conditioning.

NOTE 5—Sheet that has been in storage for prolonged periods may require a longer period of conditioning to avoid the formation of bubbles due to moisture.

8.1.8 *Thermal Stability*:

8.1.8.1 *Procedure A*—For Category A-1 and A-2 materials, test two sheets, each 300 by 300 mm (11.81 by 11.81 in.). Hang each sheet in a circulating-air oven at 180 ± 5°C (356 ± 9°F). Time of heating shall be ½h for 9.0 mm (0.354) mm thickness and under, 1 h for above 9.0 mm to 24.0 mm (0.944 in.) inclusive, and 2 h for over 24.0 mm thickness. After removal from the oven, allow the sheet to cool to 23 ± 1.0°C (73.4 ± 1.8°F) while hanging vertically. Visually examine the sheets for the presence of bubbles and blisters.

8.1.8.2 *Procedure B*—For Category B-1 and B-2 materials, visually examine the specimens used in 8.1.7.2 for the presence of bubbles and blisters.

8.1.9 *Deflection Temperature Under Flexural Load*—Test in accordance with Test Method D 648 at 1820 kPa (264 psi) loading.

8.1.10 *Tensile Strength and Elongation at Break*—Test in accordance with Test Method D 638, using Type I or Type II specimens at a cross-head speed of 5 mm/min (0.2 in./min).

8.1.11 *Impact Strength (Izod)*—Test in accordance with Method A of Test Methods D 256.

8.1.12 *Spectral Transmittance of Type UVF and UVT Sheet*—Measure the spectral transmittance at each wavelength specified in Table 2 with a suitable spectrophotometer.

8.1.13 *Abrasion Resistance*—(Applicable to Finish 3 Material Only):

Test one specimen in accordance with Test Method D 1004, using a 500-g load on each wheel for 100 cycles.

8.1.14 *Coating Adhesion*—(Applicable to Finish 3 Material Only):

Test one specimen in accordance with Section 11, Tape Adhesion, of Practice D 3002, except as follows: Clean the surface using isopropyl alcohol with a soft cloth and then air-dry. Make four parallel cuts 3.2 mm (0.125 in.) apart and a similar set of cuts at 90° to the first. Remove the debris with light hand rubbing using Grade 0000 steel wool, being careful not to contaminate the test area with grease or fingerprints.

Apply a strip of 25.4 mm (1.0 in.) wide cellulose tape,<sup>8</sup> pressing the tape down firmly without wrinkles or bubbles. Remove the tape immediately by quickly pulling it at a 90° angle. Repeat the tape pull two times, using fresh tape each time in the same grid area, being careful not to contaminate the grid by touching it. Visually compare the area from which the coating has been removed to the standards contained in Fig. 1 of Test Method D 3359.

8.1.15 *Chemical Resistance*—Test one specimen in accordance with the Covered Spot Test of Test Method D 1308. The three tested reagents shall be the following: (1) 3 % aqueous solution of trisodium phosphate, (2) 40 % aqueous solution of sulfuric acid, and (3) reagent-grade toluene.

**9. Retest and Rejection**

9.1 If any failure occurs, the materials may be retested to establish conformity in accordance with agreement between the purchaser and the seller.

**10. Packaging and Package Marking**

10.1 *Packaging*—The material shall be packaged in standard commercial containers, so constructed as to ensure acceptance by common or other carriers for safe transportation at the lowest rate to the point of delivery, unless otherwise specified in the contract or order.

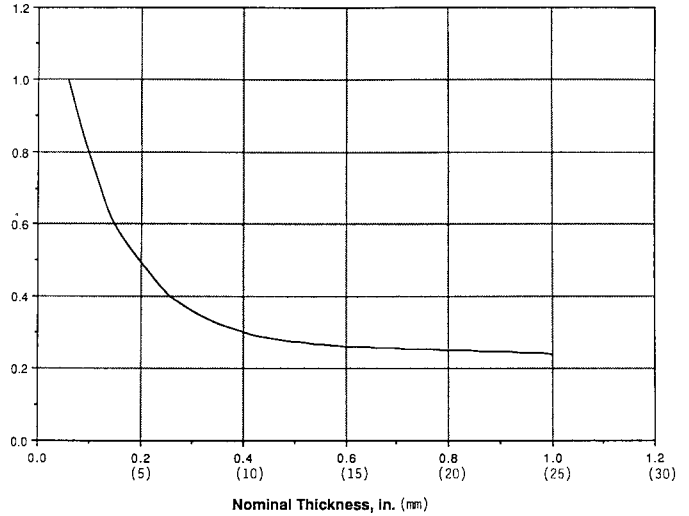


FIG. 1 Maximum Percent Water Absorption Versus Thickness

10.2 All packing, packaging, and marking provisions of Practice D 3892 shall apply to this specification.

**11. Keywords**

11.1 acrylic; acrylic sheet; plastic; plastic sheet; PMMA; poly(methyl methacrylate); recycled material; transparent plastic; sheet

<sup>8</sup> 3M 600 cellulose tape, or equivalent, has been found suitable for this purpose.

**SUMMARY OF CHANGES**

This section identifies the location of selected changes to this specification. For the convenience of the user, Committee D20 has highlighted those changes that may impact the use of this specification. This section may also include descriptions of the changes or reasons for the changes, or both.

*D 4802 – 01:*

- (1) Revised type designation and requirements from UV Absorbing to UV Filtering to eliminate confusion with general purpose materials which contain UV absorber.
- (2) Deleted exceptions for and references to corner letgoes.
- (3) Deleted requirements for and references to obsolete test methods D 673 and D 756.
- (4) Deleted weathering requirements which only applied to finish 3 material.

- (5) Revised packaging requirements.
- (6) Added several nominal thicknesses to Table 3 to accommodate both hard metric and hard English units to clearly specify the tolerances since both are used commercially. No tolerances were changed.
- (7) Added paragraph 1.4 to address recycling.
- (8) Summary of Changes section added.

*The ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.*

*This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.*

*This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).*