



*"Celebrating 33 Years of
Professional Sales & Service"*

August 22, 2011

Mr. Chuck Dammion
Dammion Engineering
554 Old Spanish Trail
Slidell, LA 70458

Re: Your Fencing Needs

Mr. Dammion;

Thank you for contacting Baker Sales Inc. with your fencing inquiry.

I have enclosed our quote, a brochure and a drawing for the 6 foot high aluminum ornamental fencing you requested. Line item number four is the optional quad flair final we spoke about. It's the same style that is on the fence across the street.

If you need fence installer information or I can help any other way please let me know.

Sincerely yours,
Baker Sales Inc.

A handwritten signature in black ink, appearing to read "Michael J. Wolfram".

Michael J. Wolfram
Sales Manager
michael@bakersalespipe.com

Visit our web page
www.BakerSalesPipe.com

for Current & Specials.

P.S. No order is TOO BIG
or too small!

Baker Sales Inc. ~ P.O. Box 5100 ~ Slidell, Louisiana 70469
Phone: (985) 641-6200 ~ 1-800-472-4204 ~ Fax (985) 641-5200 ~
email: sales@bakersalespipe.com
Or Visit our website: www.bakersalespipe.com

QUOTATION

No. 44812

PG 1 OF 1

PO Box 62600
 Department 1250
 New Orleans, LA
 70162-2600
 Phone: (985) 641-6200
 Fax: (985) 641-2482



QUOTED TO
 DAMMON ENGINEERING


SHIP VIA
 COLLECT
 JOB NAME
 RESALE #
 SHIP TO
 WILL CALL

BUYER
 CHUCK DAMMON

SHIP DATE
 08/22/2011
 EXPIRES
 08/23/2011
 SHIP VIA
 WILL CALL
 F.O.B.
 SLIDELL, LA

LINE	QUANTITY	DESCRIPTION	WIDTH	LENGTH	WEIGHT	UNIT PRICE	TOTAL
1	26 PCS	#F1-63008 6'H X 3 RAIL SPEAR TOP PANEL W/6 CLIPS <i>Style #1</i>			557.0	80.53/FT	2,093.78
2	25 PCS	#NVL-6319 -.102" LINE POST FOR 3 RAIL/SPEAR TOP - B <i>In Brochure</i>			250.0	22.25/FT	556.25
3	2 PCS	#NVE-6319 -.102" END POST FOR 3 RAIL/SPEAR TOP - B			20.0	22.25/FT	44.50
4	390 PCS	QUAD FLARE FINIAL ALUM POLYESTER COATED BLACK <i>(Optional)</i>			1,061.0	1.55/FT	604.50

TOTAL WT	SUBTOTAL	CUTTING	LA	PARISH	TOTAL
1,888 LBS	\$3,299.03	\$0.00	\$131.96	\$156.70	\$3,587.69

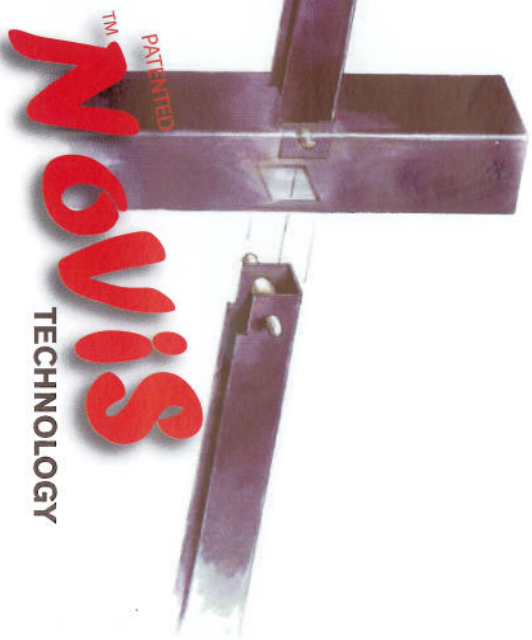

PATENTED Novis TECHNOLOGY

OUR INNOVATIVE "NO VISIBLE SCREWS" POST, PANEL AND RAIL SYSTEM ...IS THE CLEANEST LOOK IN THE INDUSTRY. THERE ARE NO VISIBLE SCREWS WHERE THE PICKETS MEET THE RAIL, OR WHERE THE RAIL INSERTS INTO THE POST.



OUR UNIQUE SYSTEM ...IS THE MOST RACKABLE PANEL IN THE INDUSTRY. EVERY SERIES AND STYLE RACKS 36 INCHES PER 6 OR 8 FOOT SECTION. THERE IS NEVER ANY UPCHARGE FOR DOUBLE PUNCHING.

OUR STAINLESS STEEL CLIP ...ALLOWS OUR PANEL TO FIT SNUGLY INTO A ROUTED POST, MAKING ASSEMBLY A SNAP!



PATENTED Novis TECHNOLOGY

Our unique stainless steel clip system makes installation faster and easier!

DIMENSIONS AND SPECIFICATIONS


	JN-SERIES MECHANICAL FENCE 5/8" PICKETS NO VISIBLE SCREWS Novis	FN-SERIES FENCE 3/4" NO VISIBLE SCREWS Novis	CN-SERIES FENCE 3/4" PICKETS NO VISIBLE SCREWS Novis
Panel Size	6 ft. L - 3 ft. to 6 ft. H	6 ft. L - 4 ft. to 6 ft. H	8 ft. L - 4 ft. to 6 ft. H
Pickets	5/8" sq. x .050"	3/4" sq. x .050"	3/4" sq. x .050"
Rails-Top Wall	1" x .079"	1 1/4" x .078"	1 1/2" x .079"
Rails-Side Walls	1" x .079" 0.156" w/NOVIS Bar	1" x .078"	1 1/2" x .079" 0.19" w/NOVIS bar
Mushroom Top Rail	-----	1.417" x 1.5" x .039"-.19" w/NOVIS bar	1.417" x 1.5" x .039"-.19" w/NOVIS bar
"C" Rounded Top Rail	-----	-----	1 1/8" x 1 3/8" Top wall .118" Side wall .787"-.19" w/NOVIS bar
Gate Frame	1.626 sq. x .122"	1.626 sq. x .122"	1.626 sq. x .122"
Standard Post	2" sq. x .060"	2" sq. x .060"	2 1/2" sq. x .075"
Alternate Post	-----	2 1/2" sq. x .075"	-----
Std. Gate Post	2" sq. x .125"	2" sq. x .125"	2 1/2" sq. x .125"
Alt. Gate Post	-----	2 1/2" sq. x .125"	-----
Picket Spacing	3 1/4"	3 1/4"	3 1/4"
Post Spacing	72" on center	72" on center w/ 2" post w/ 2 1/2" post	96" on center
Paint Processes	Electrostatic Powder Coat	Electrostatic Powder Coat	Electrostatic Powder Coat
Colors	Black, White, Bronze, Green	Black, White, Bronze, Green	Black, White, Bronze, Green

FENCE AND GATE ACCESSORIES



- STYLES 3 & 5 AVAILABLE ONLY IN 4.5 FT PANELS AND MEET BOCA POOL CODES
- STYLE 7 WITH MUSHROOM CAP AVAILABLE IN 4 FOOT AND 5 FOOT PANELS AND MEETS BOCA POOL CODES

FORSTER ALUMINUM FENCE STYLES

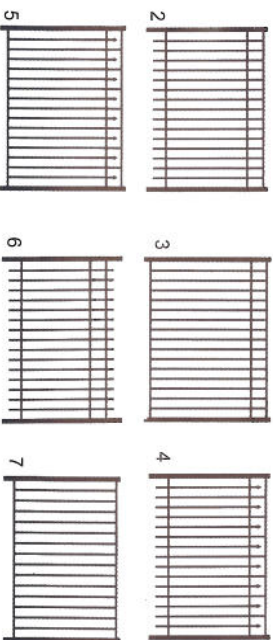

UNIVERSAL SCROLL GATES

ARCH GATE

Gate Openings: 4' - 5' - 6'
Height Available: 4' - 4.5' - 5' - 6'

DOUBLE DRIVE GATE

Gate Openings: 10' - 12'
Height Available: 4' - 4.5' - 5' - 6'

* Manufactured without bottom scroll to meet BOCA pool codes

STANDARD GATES

ARCH GATE

WALK GATE

Gate Openings: 4' - 5' - 6'
Height Available: 4' - 4.5' - 5' - 6'

ESTATE GATE


Gate Openings: 8' - 10' - 12'
Height Available: 4' - 4.5' - 5' - 6'

DOUBLE DRIVE GATE

Gate Openings: 8' - 10' - 12'
Height Available: 4' - 4.5' - 5' - 6'

FORSTER FENCE

Panel Specification on FNI Series

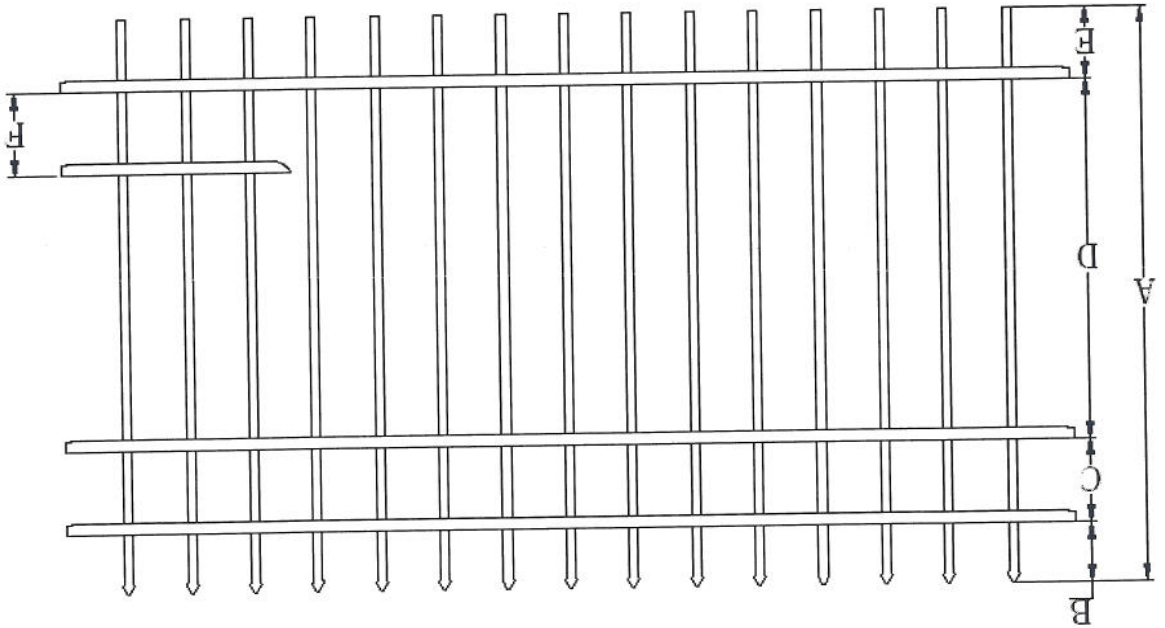

A	B	C	D	E	F
FNI-4300	48"	5"	7"	30"	6"
FNI-5300	60"	6"	7"	40"	7"
FNI-6300	72"	6"	8"	51"	7"
FNI-6400	72"	6"	8"	51"	7"

- Note: 1. Residential 3/4" fence only.
 2. The width is 72" (post center to center) with 2.0" post and 72.5" with 2.5" post.
 3. Picket: 3/4" square with wall thickness 0.05"
 4. Picket space: 3-11/16"
 5. Rail: 1" X 1 1/16" with wall thickness top 0.078", side 0.078"

Post Specification on FNI Series



Regular Post	for 6' high panel	102"	2.0" or 2.5"	0.06" or 0.075"
	for 5' high panel	88"		
	for 4' high panel	72"		
Gate Post	for 6' high panel	102"	2.0" or 2.5"	0.125"
	for 5' high panel	88"		
	for 4' high panel	72"		
Style	A	B	C	