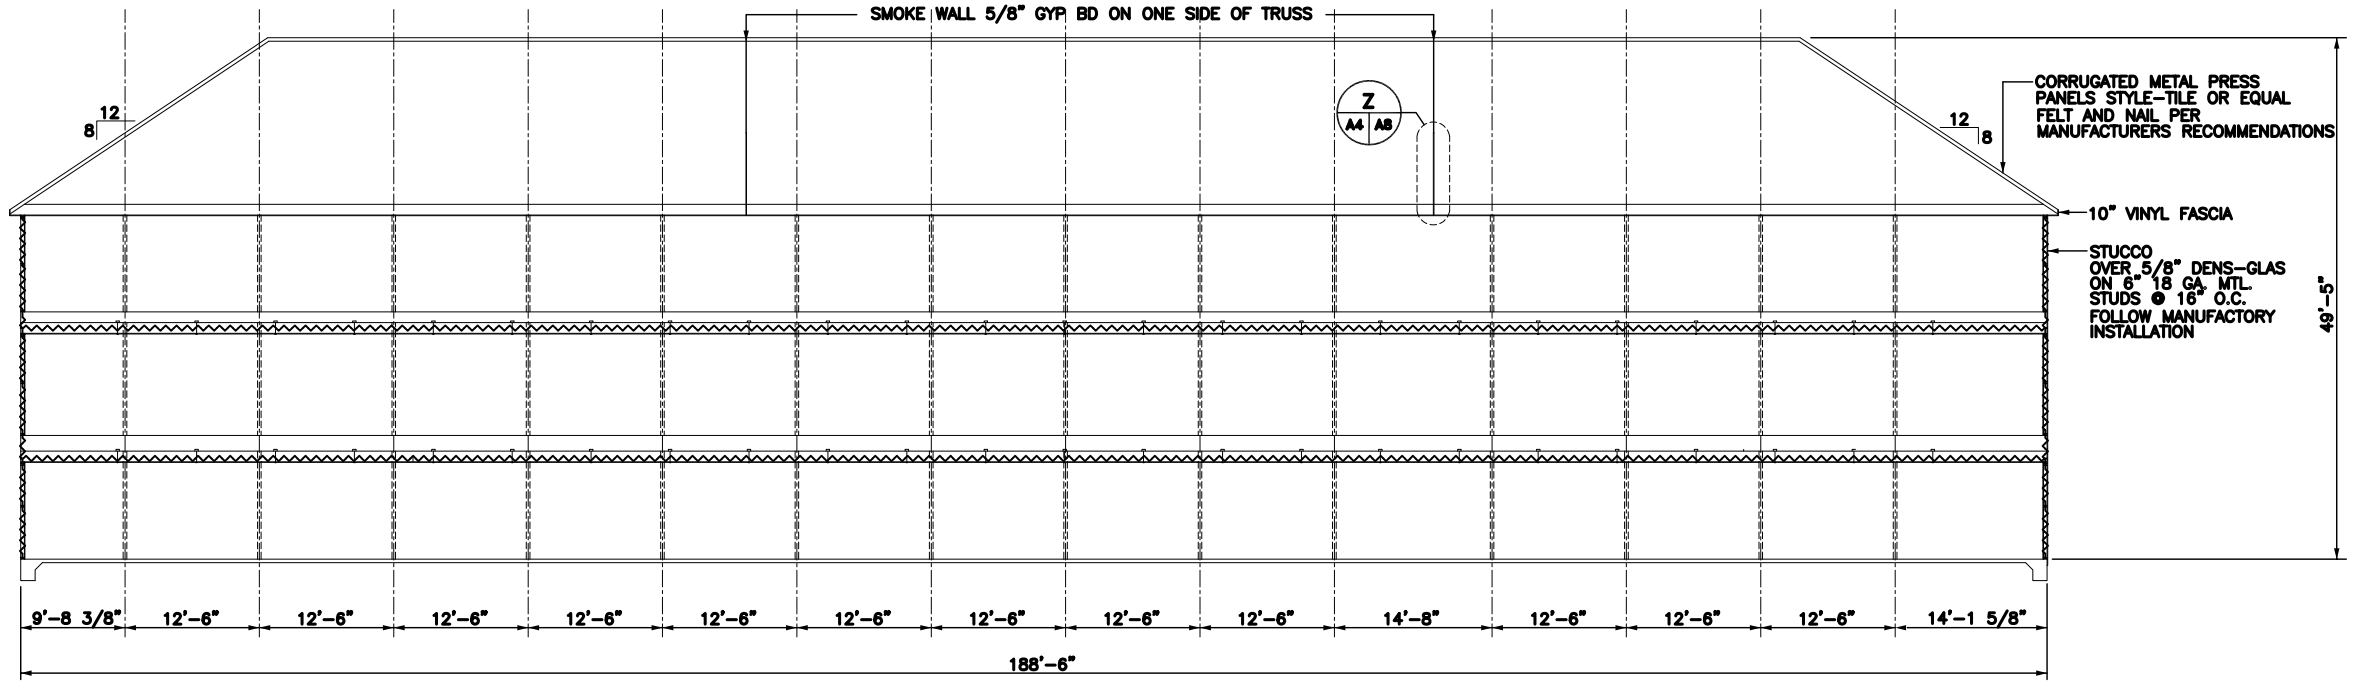

LONGITUDINAL SECTION (J / A1 A4)

SCALE: 1/8"=1'-0"

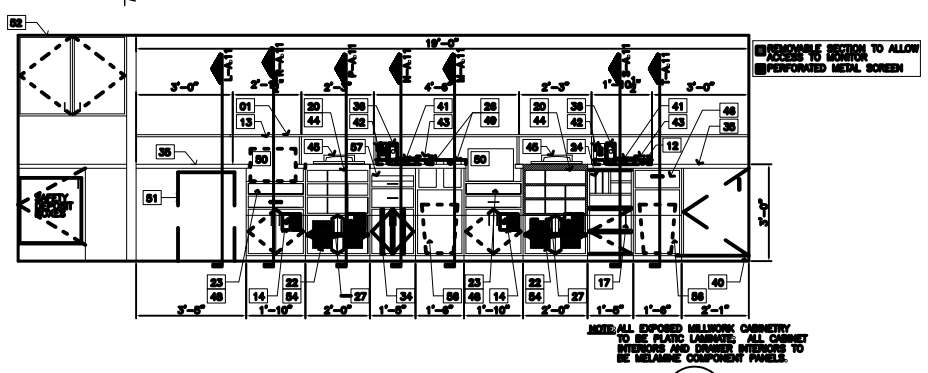

REGISTRATION DESK MILLWORK ELEVATION (4 / A-4)

N.T.S.

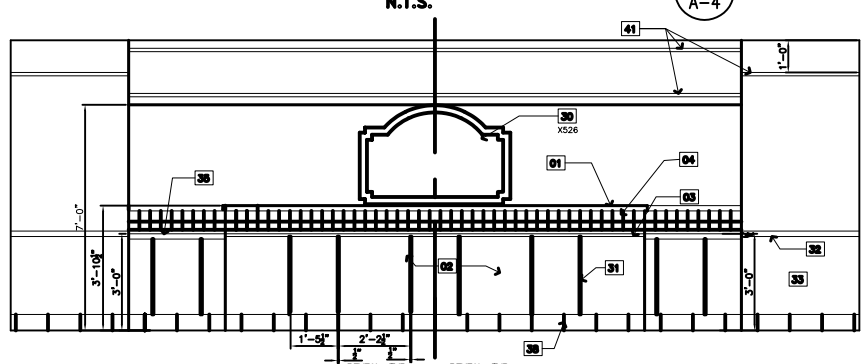

REGISTRATION DESK ELEVATION (3 / A-4)

N.T.S.

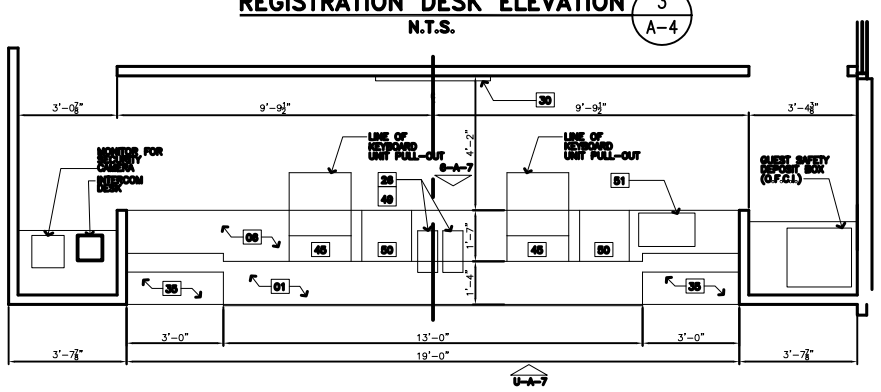

REGISTRATION DESK FLOOR PLAN

N.T.S.

REGISTRATION DESK CONSTRUCTION NOTE LEGEND

01	CORIAN OR GRANITE COUNTERTOP
02	PLASTIC LAMINATE
03	CORIAN TRIM MATCH TOP
04	CERAMIC TILE "CTS"
05	NOT USED
06	PLASTIC LAMINATE CABINETRY. PL-2: EXPOSED MILLWORK CABINET SURFACES ON EMPLOYEE SIDE.
07	S.S. DROP EDGE (1 1/2")
08	OPEN ELECTRICAL RACEWAY
09	3" X 6" OPENING FOR ACCESS TO WIREWAY
10	ADJUSTABLE SHELF WITH LIP AT BACK EDGE.
11	OPEN COMMUNICATIONS WIREWAY
12	PLUGMOLD WITH OUTLETS
13	UNDERCOUNTER LIGHT FIXTURE
14	HARMONICA AND DATA PORTS INSTALLED BELOW PRINTER.
15	INTERIOR PANELS (MELAMINE COMPONENT PANELS) PL-3; ALL INTERIOR PANELS AND DRAWER INTERIORS TO BE M.C.P.
16	ISOLATED GROUND DEDICATED CIRCUIT OUTLET
17	RECESSED PULLS; COLOR: BLACK. SUBMIT SAMPLES TO OWNER.
18	WIRE MANAGEMENT TROUGH
19	1 1/2" DIAMETER HOLE WITH GROMMET
20	REMOVABLE P.LAM UNIT FOR OWNER FURNISHED MONITOR UNIT TO BE REMOVABLE FOR INSTALLATION OF MONITOR AND ACCESS TO DATA CABLE CONNECTIONS.
21	ADJUSTABLE MONITOR SHELF W/ ADJUSTABLE EDGE LIP.
22	PERFORATED METAL SCREEN. MoNICHOLS, STAINLESS STEEL, 18 HOLES P.S.I. SIZE O/A. 3/16" DIAM. AT 1/4" STAGGERED CENTERS
23	CASH DRAWER – OWNER FURNISHED; M-6 CASH DRAWER CORPORATION, MODEL #MF-122. (16.6"W X 16.3"L X 4.25" H) CONTRACTOR TO INSTALL AND ATTACH TO MILLWORK PRIOR TO FINAL FABRICATION.
24	1/4" CLEAR ACRYLIC DIVIDERS WITH EXPOSED EDGES POLISHED
25	NOT USED
26	OPENING FOR FOLIO: 1'-3 1/2" D X 7 1/2" W
27	SLIDE-OUT SHELF WITH LIP AT BACK EDGE. ACCURIDE PULL-OUT SHELF RUNNER, MODEL # 322.
28	RECESSED PAPER STORAGE BEHIND PRINTER
29	SLIDE OUT SHELF WITH PLASTIC LAMINATE FINISH
30	LOGO SIGN PANEL (O.F.C.I.)
31	1/2" REVEAL– PAINT
32	WOOD CHAIR RAIL –PAINT
33	PAINT-ON KNOCKDOWN
34	PLASTIC LAMINATE CLAD PLYWOOD DIVIDERS
35	H.C. ACCESSIBLE COUNTER
36	TELEPHONE OUTLET
37	WOOD BASE MOULDING, PT. 1
38	TILE BASE "CT-2"
39	WOOD BASE CAP
40	3/4" SUBSTRATE-TOE KICK.
41	TEBA UNIT – OWNER FURNISHED
42	CREDIT CARD IMPRINTER – OWNER FURNISHED
43	RESERVATIONS TELEPHONE OWNER FURNISHED
44	UNDERCOUNTER OPEN STORAGE W/ CLEAR ACRYLIC DIVIDERS EQUALLY SPACED, EXCEPT AS SHOWN. UNIT TO SLIDE OUT TO PROVIDE ACCESS TO COMPUTER MONITOR.
45	C.R.T. – RECESSED IN COUNTERTOP WITH KEYBOARD OWNER FURNISHED
46	DRAWERS (MISC. STORAGE)
47	TELEPHONE CONSOLE – OWNER FURNISHED
48	CASH DRAWER – OWNER FURNISHED – M-6 CASH DRAWER CORPORATION, MODEL #MF-122. (16.6"W X 16.3"L X 3.94"H) MILLWORK CONTRACTOR TO INSTALL AND ATTACH TO MILLWORK PRIOR TO FINAL FABRICATION. VERIFY SIZE/ MODEL# BEFORE FABRICATION W/ OWNER'S REP.
49	FOLIO BUCKET – RECESSED IN COUNTER TOP OWNER FURNISHED
50	COMPUTER PRINTER – OWNER FURNISHED RECESSED IN COUNTERTOP WITH FRONT ACCESS
51	"DACO-8" UNIT – OWNER FURNISHED
52	CABINET
53	CABINET WITH ADJUSTABLE SHELF WITH LIP AT BACK EDGE.
54	COMPUTER CABINET WITH SLIDE-OUT SHELF. DOORS TO HAVE PERFORATED METAL SCREEN FOR VENTILATION. MoNICHOLS, STAINLESS STEEL, 18 HOLES P.S.I. SIZE O/A. 3/16" DIAM. AT 1/4" STAGGERED CENTERS.
55	CABINET WITH SLOTS AS SHOWN
56	OPEN CABINET WITH TRASH STORAGE BELOW
57	SLIDE OUT SHELF FOR POSTING TRAY. 19" X 17" WIDE. FACE TO BE FLUSH WITH DRAWER FACE BELOW.

FINISH LEGEND

FINISH	DESCRIPTION	LOCATION
PL1	PLASTIC LAMINATE FORMICA PATTERN 7022-58 COLOR: NATURAL CHANG FINISH: MATTE	REGISTRATION DESK FACADE AND BACK OF FRONT DESK MILLWORK BOARD ROOM, MEETING ROOM, MILLWORK
PL-2	PLASTIC LAMINATE FORMICA PATTERN 771-58 COLOR:WHITE KID LEATHER FINISH: MATTE	REGISTRATION DESK; EXPOSED SURFACES OF INTERIOR COUNTERS AND SUITE, BACK OF HOUSE MILLWORK TOILET PARTITION
PL-3	PLASTIC LAMINATE WILSON ART PATTERN 4308-60 COLOR: VERDIGRIS	ELEVATOR WALL (INSIDE)

NOTE: ALL FINISHES TO BE VERIFIED BY LA QUINTA INN, INC. PRIOR TO ANY FABRICATION.

(FOR PT-TYPES SEE FINISH SCHED.)

NOTE: EQUIPMENT CUTOUT DIMENSIONS TO BE VERIFIED IN SHOP DRAWING REVIEW.

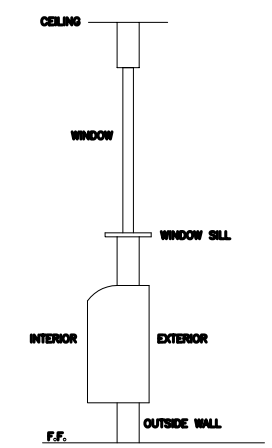

NOTE: ALL DIMENSIONS SHALL BE VERIFIED BY GENERAL CONTRACTOR

A/C & WINDOW ELEVATION

N.T.S.

LONGITUDINAL SECTION

LA QUINTA INN & SUITES #12
HOLIDAY BOULEVARD
SLIDELL, LOUISIANA

LA QUINTA INN & SUITES #12

DAMMON ENGINEERING, INC.
1095 FLORIDA AVENUE SLIDELL, LA. 70458
985-649-5832
DAMMONENGINEERING.COM

SCALE:AS NOTED
FILE:
JOB NO. 1828
DATE: 2-15-07
SHEET 12

A-4

OF 33