



## Standard Test Method for Determining Travel of a Membrane Switch <sup>1</sup>

This standard is issued under the fixed designation F 1682; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reappraisal.

### 1. Scope

1.1 This test method covers the determination of the travel of a membrane switch.

1.2 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

### 2. Referenced Documents

2.1 ASTM Standards:

F 1570 Test Method for Determining the Tactile Ratio of a Membrane Switch<sup>2</sup>

### 3. Terminology

3.1 *Definitions:*

3.1.1 *contact closure*—point at which a specified resistance is achieved.

3.1.2  $F_{\max}$  (actuation force)—maximum force measured prior to or including point at which contact closure ( $F_{\min}$ ) is achieved (see Fig. 1 and Fig. 2).

3.1.3  $F_{\min}$ —minimum force seen between  $F_{\max}$  and point at which probe movement ceases.  $F_{\max}$  can equal  $F_{\min}$ .  $F_{\min}$  is the ideal location for contact closure (see Fig. 1 and Fig. 2).

3.1.4 *membrane switch*—a momentary switching device in which at least one contact is on, or made of, a flexible substrate.

3.1.5 *non-tactile switch*—a switch assembly that provides a tactile ratio equal to zero (see Test Method F 1570).

3.1.6 *tactile switch*—a switch assembly that provides a tactile ratio greater than zero (see Test Method F 1570).

3.1.7 *travel*—distance moved by the surface in contact with the test probe.

### 4. Significance and Use

4.1 Switch travel is one factor used to quantify the feel of a membrane switch.

### 5. Apparatus

5.1 *Test Probe*, made of nonelastic material with shape and size to be specified.

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee F-1 on Electronics and is the direct responsibility of Subcommittee F01.18 on Membrane Switches.

Current edition approved Feb. 10, 1996. Published April 1996.

<sup>2</sup> *Annual Book of ASTM Standards*, Vol 10.05.

### TYPICAL TACTILE FORCE-TRAVEL CURVE

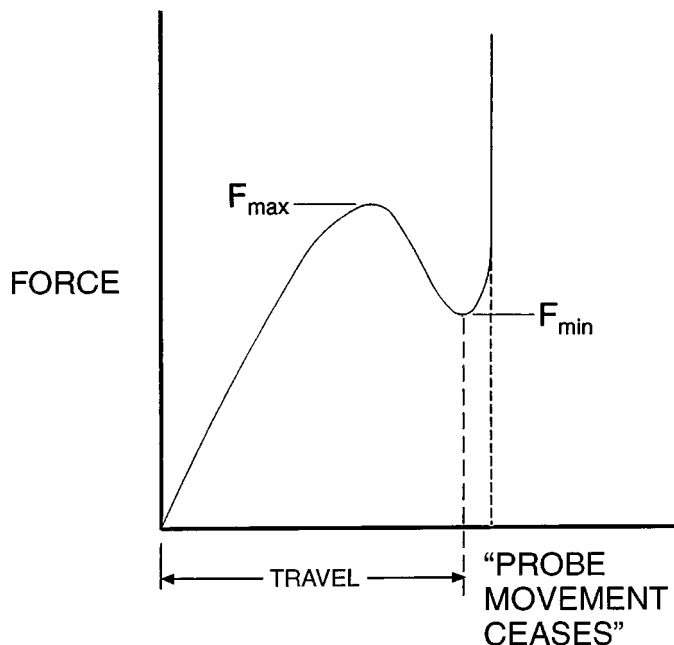


FIG. 1 Typical Tactile Force—Travel Curve

5.2 *Device*, to hold probe securely and provide perpendicular movement into and away from switch under test.

5.3 *Monitoring Device*, suitable to detect  $F_{\max}$  and  $F_{\min}$ .

5.4 *Test Surface*, flat, smooth, unyielding and larger than switch under test.

5.5 *Suitable Monitoring Device*, to measure travel.

### 6. Procedure

6.1 *PreTest Setup:*

6.1.1 Determine if switch is “tactile” or “non-tactile”. If unknown, measure in accordance with Test Method F 1570 (see Fig. 1 and Fig. 2).

6.1.2 Precondition switch by depressing manually 25 times.

6.1.3 Secure switch on test surface.

6.1.4 Position test probe over desired area of switch.

6.1.5 Attach travel monitoring device to probe.

6.1.6 Position probe until tip is just touching top surface of switch.

6.1.7 Set travel monitoring device to zero.

TYPICAL NON-TACTILE FORCE-TRAVEL CURVE

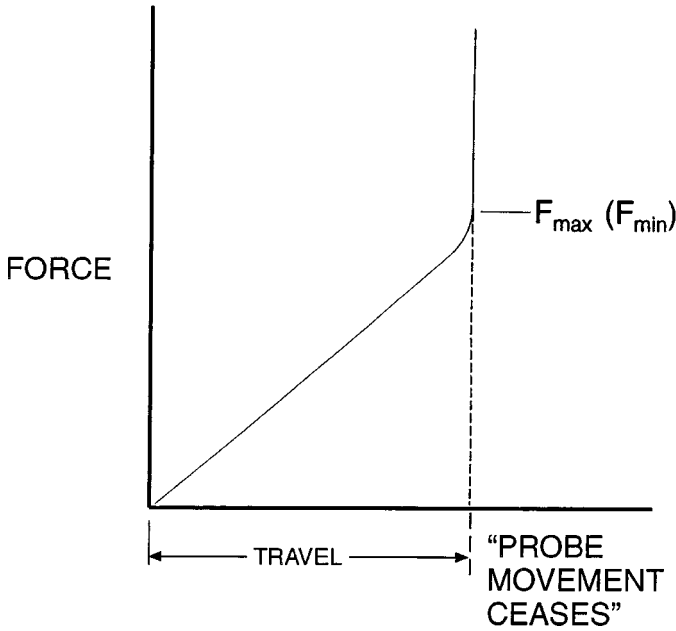


FIG. 2 Typical Non-Tactile Force Travel Curve

6.2 *In-Process Test, Tactile Switch (Tactile Ratio > 0)* (see Fig. 1):

6.2.1 Begin by activating test probe movement down at a rate not to exceed 13 mm/s.

6.2.2 Continue probe movement past  $F_{max}$  until reaching  $F_{min}$  (see Fig. 1), record travel.

6.2.3 Reverse direction of test probe until it is no longer touching the top surface of the switch.

6.2.4 Repeat 6.2.1 thru 6.2.3 four times.

6.3 *In-Process Test, Non-Tactile Switch (Tactile Ratio = 0)* (see Fig. 2):

6.3.1 Begin by activating test probe movement down at a rate not to exceed 13 mm/s.

6.3.2 Continue travel until probe movement stops ( $F_{max} = F_{min}$ ; see Fig. 2), record travel.

6.3.3 Reverse direction of test probe until it is no longer touching the top surface of the switch.

6.3.4 Repeat 6.3.1 thru 6.3.3 four times.

7. Calculations

7.1 Determine the average of five readings and record as "Travel."

8. Report

8.1 Report the following information:

8.1.1 Temperature,

8.1.2 Relative humidity,

8.1.3 Barometric pressure,

8.1.4 Shape and size of probe,

8.1.5 Description of probe holding fixture and monitoring device,

8.1.6 Part number or description of switch, or both,

8.1.7 Date of test, and

8.1.8 Travel.

9. Precision and Bias

9.1 The precision and bias of this test method are under investigation.

10. Keywords

10.1 displacement; membrane switch; travel

*The American Society for Testing and Materials takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.*

*This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, 100 Barr Harbor Drive, West Conshohocken, PA 19428.*