
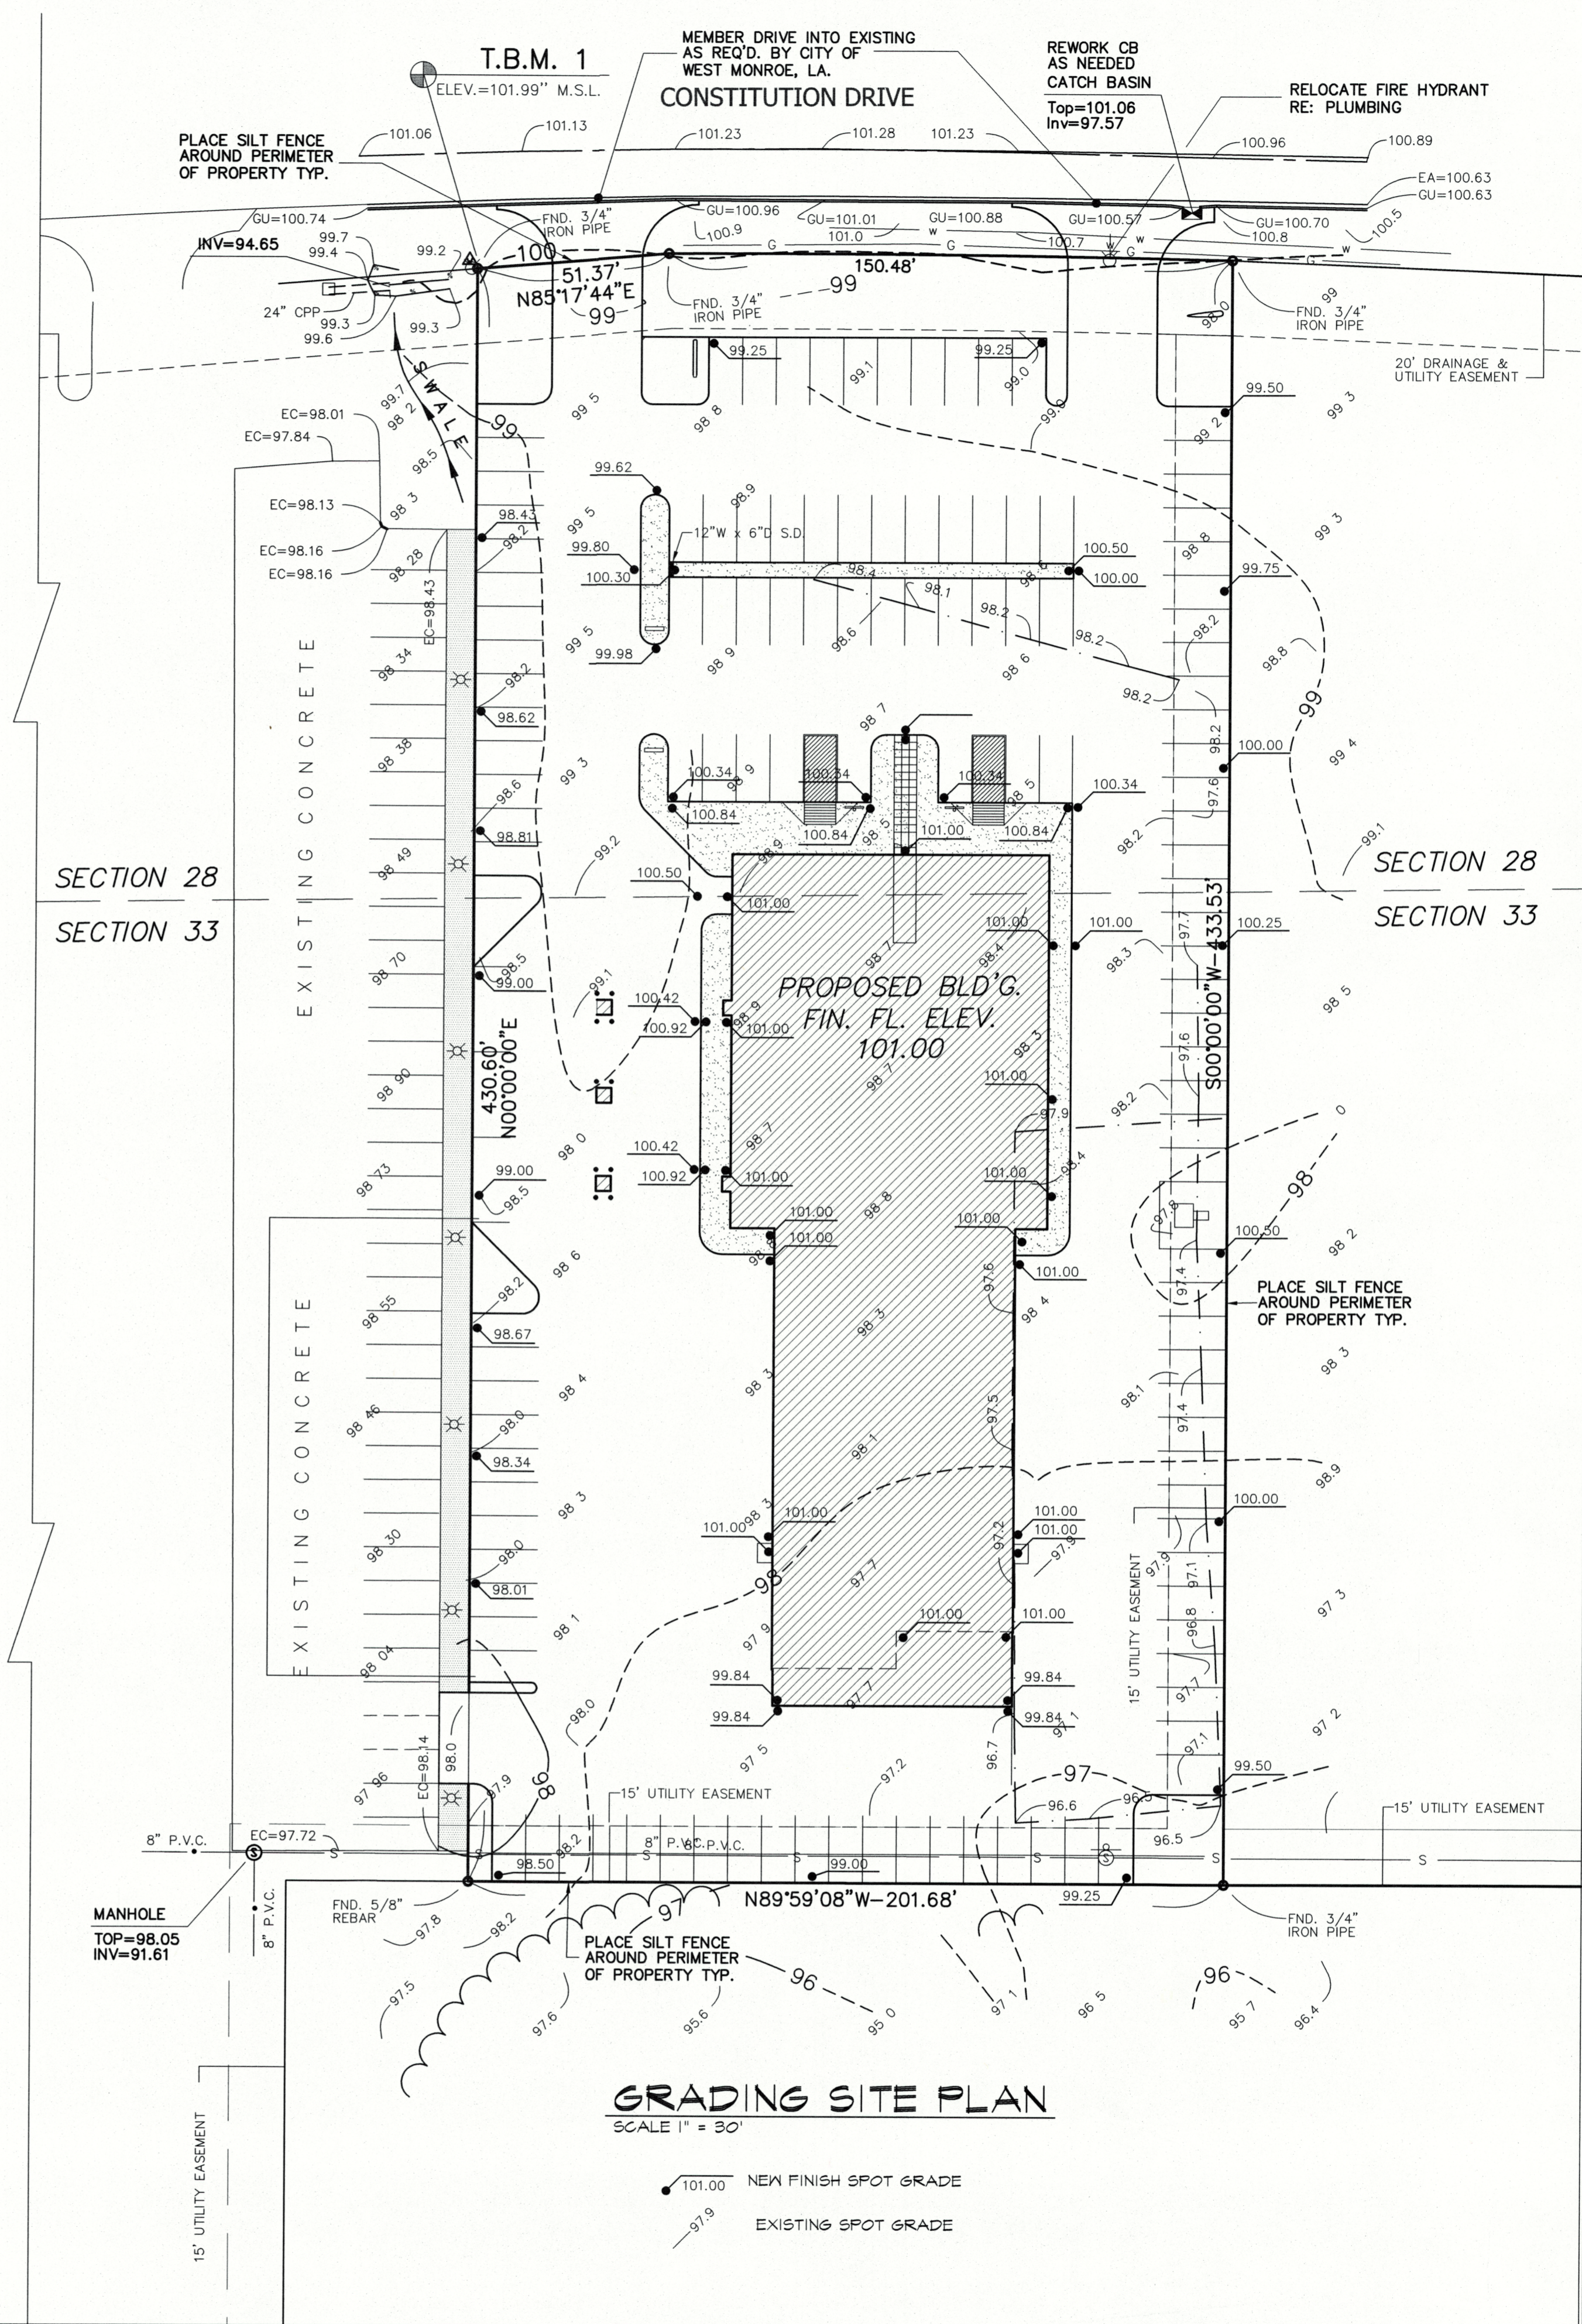
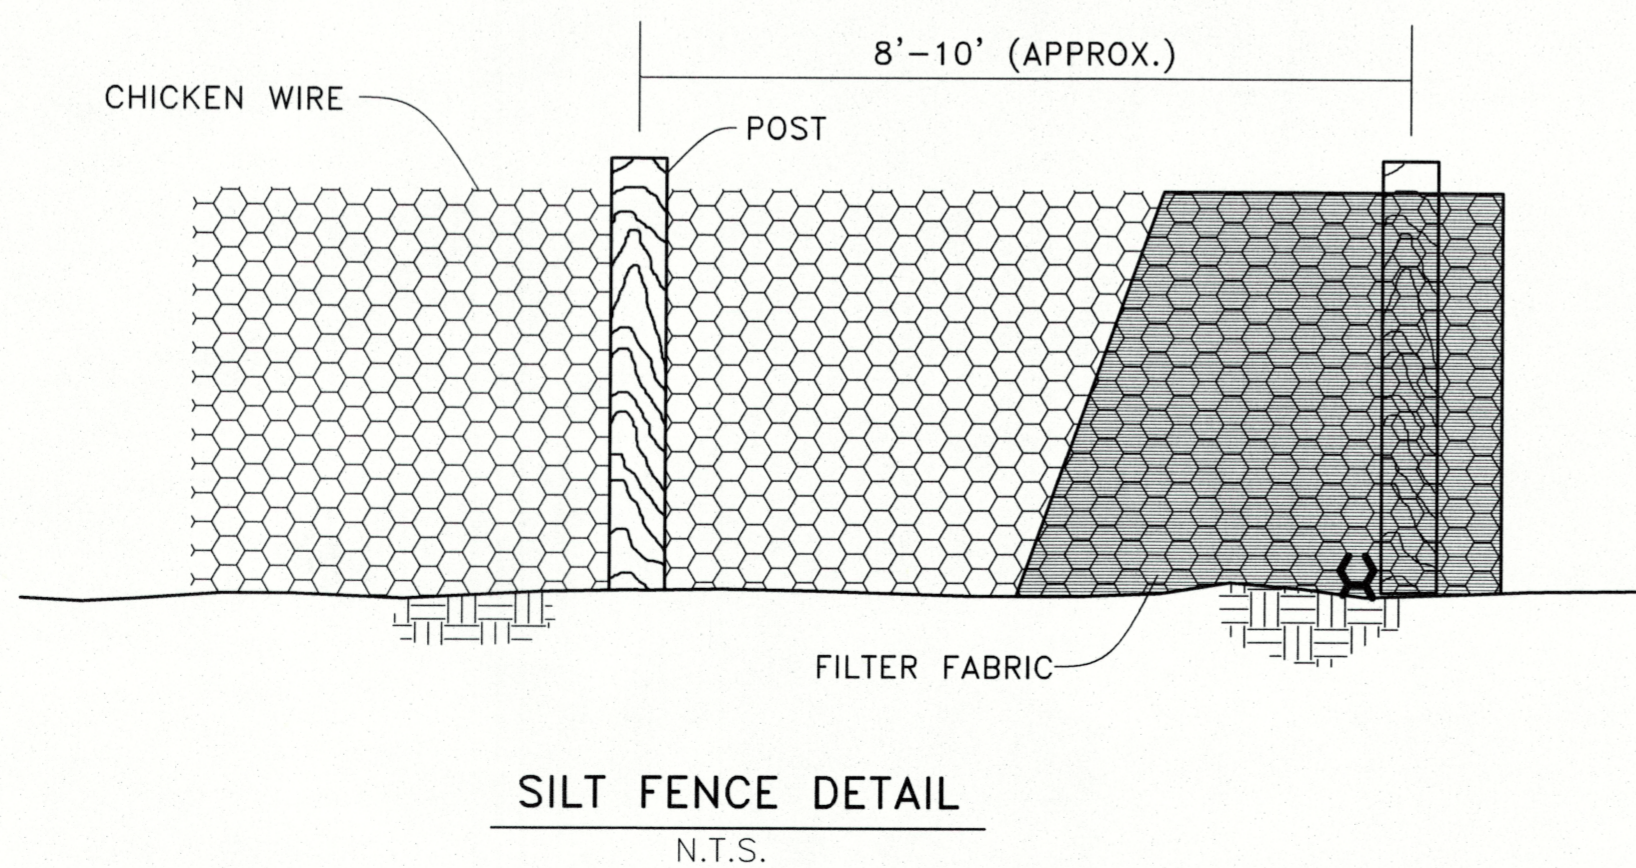



GENERAL NOTES:

- CONTRACTOR SHALL APPLY FOR A STORMWATER DISCHARGE PERMIT FROM THE LOUISIANA DEPARTMENT OF ENVIRONMENTAL QUALITY AND FURNISH A COPY OF THE APPLICATION TO THE ENGINEER PRIOR TO COMMENCING WORK. THE ENGINEER WILL PROVIDE THE REQUIRED APPLICATION FORM TO THE CONTRACTOR UPON REQUEST.
- ENGINEER WILL PROVIDE AND MAINTAIN EROSION CONTROL MEASURES AS SHOWN HEREON TO PREVENT SILTATION OF ADJACENT PROPERTY AND DRAINAGE FACILITIES. ANY SILTATION OF ADJACENT PROPERTY OR DRAINAGE FACILITIES WILL BE REMOVED PRIOR TO FINAL ACCEPTANCE BY OWNER.
- EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL SUCH TIME THAT CONSTRUCTION HAS PROGRESSED TO THE POINT THAT SILTATION IS NOT EXPECTED.
- ALL AREAS WHICH ARE DISTURBED DURING CONSTRUCTION SHALL BE STABILIZED WITH SEED AND MULCH AS SOON AS PRACTICAL AFTER BEING DISTURBED. THESE AREAS SHALL BE MAINTAINED UNTIL FINAL ACCEPTANCE BY OWNER.
- ALL RIP-RAP INSTALLED AT ENDS OF DRAINAGE PIPE SHALL BE OF THE 10 POUND CLASS AND SHALL BE PLACED ON GEOTEXTILE FABRIC. IT IS THE CONTRACTOR'S RESPONSIBILITY TO INSPECT AND MAINTAIN ALL EROSION CONTROL MEASURES ON A DAILY BASIS DURING CONSTRUCTION INCLUDING REPLACEMENT OF ANY FAILED MEASURES.
- IF WIND EROSION BECOMES SIGNIFICANT DURING CONSTRUCTION, THE CONTRACTOR SHALL STABILIZE THE AFFECTED AREA USING SPRINKLING, IRRIGATION OR OTHER ACCEPTABLE METHODS. HAVE NOT BEEN COMPLETED TO PLAN GRADE OR WHERE THE WEATHER OR SOIL CONDITIONS ORGANIC OR SYNTHETIC MULCHES SHALL BE USED ON CUT AND EMBANKMENT SLOPES WHICH WILL NOT PERMIT COMPLETING THEM WITHIN A REASONABLE TIME OR ON OTHER AREAS WHERE SOIL EROSION IS LIKELY TO OCCUR.


STORMWATER POLLUTION PREVENTION PLAN

- PHASE 1 - PRECONSTRUCTION REQUIREMENTS**
- ESTABLISH SILT TRAPS AT ALL EXISTING PRIMARY STORMWATER DISCHARGE POINTS. THIS SHALL CONSIST OF PLACING SEDIMENT CHECK DAMS AND SILT FENCING AS INDICATED.
 - PLACE ALL DEVICES SUCH THAT NO DIRECT DISCHARGE CAN BE MADE WITHOUT STORMWATER RUNNING THROUGH THESE TEMPORARY DETENTION DEVICES.
- PHASE 2 - INITIAL CONSTRUCTION REQUIREMENTS**
- COORDINATE CONSTRUCTION ACTIVITIES TO CONTROL DISTURBANCE TO NATURAL GROUND WITHIN THE EXISTING DRAINAGE CHANNELS.
 - PERFORM GRADING TRANSVERSE TO SLOPES.
 - PROVIDE CONTINUOUS SILT FENCING ALONG ENTIRE LENGTH OF TOE OF SLOPES PRIOR TO PLACING FILL MATERIAL.
- PHASE 3 - INTERMEDIATE CONSTRUCTION REQUIREMENTS**
- ESTABLISH GRASS GROUND COVER ON FINISHED SLOPES AS SOON AS PRACTICAL AFTER GRADING OPERATIONS ARE COMPLETE.
 - ESTABLISH SEDIMENT CHECK DAMS AROUND OPEN PIPE INLETS. MAINTAIN UNTIL RUNOFF AREAS ARE PAVED OR STABILIZED.
 - ESTABLISH SILT FENCE AND SEDIMENT CHECK DAMS ON NEW DISCHARGE POINTS AND MAINTAIN UNTIL COMPLETED OUTLET FACILITIES ARE INSTALLED.
- PHASE 4 - FINAL CONSTRUCTION REQUIREMENTS**
- MAINTAIN PERIMETER BARRIERS UNTIL ALL SLOPES AND DISTURBED AREAS HAVE ATTAINED SPECIFIED GRASS COVER AND PAVING IS COMPLETE.
 - REMOVE BARRIERS (SILT FENCES, HAY BALES, ETC.) AND DISPOSE OF PROPERLY.
 - REMOVE SEDIMENT BUILD-UPS IN DETENTION FACILITIES AND DOWNSTREAM PROPERLY.
 - FINISH DRESS AND ESTABLISH GRASS COVER ON ANY REMAINING DISTURBED AREAS.

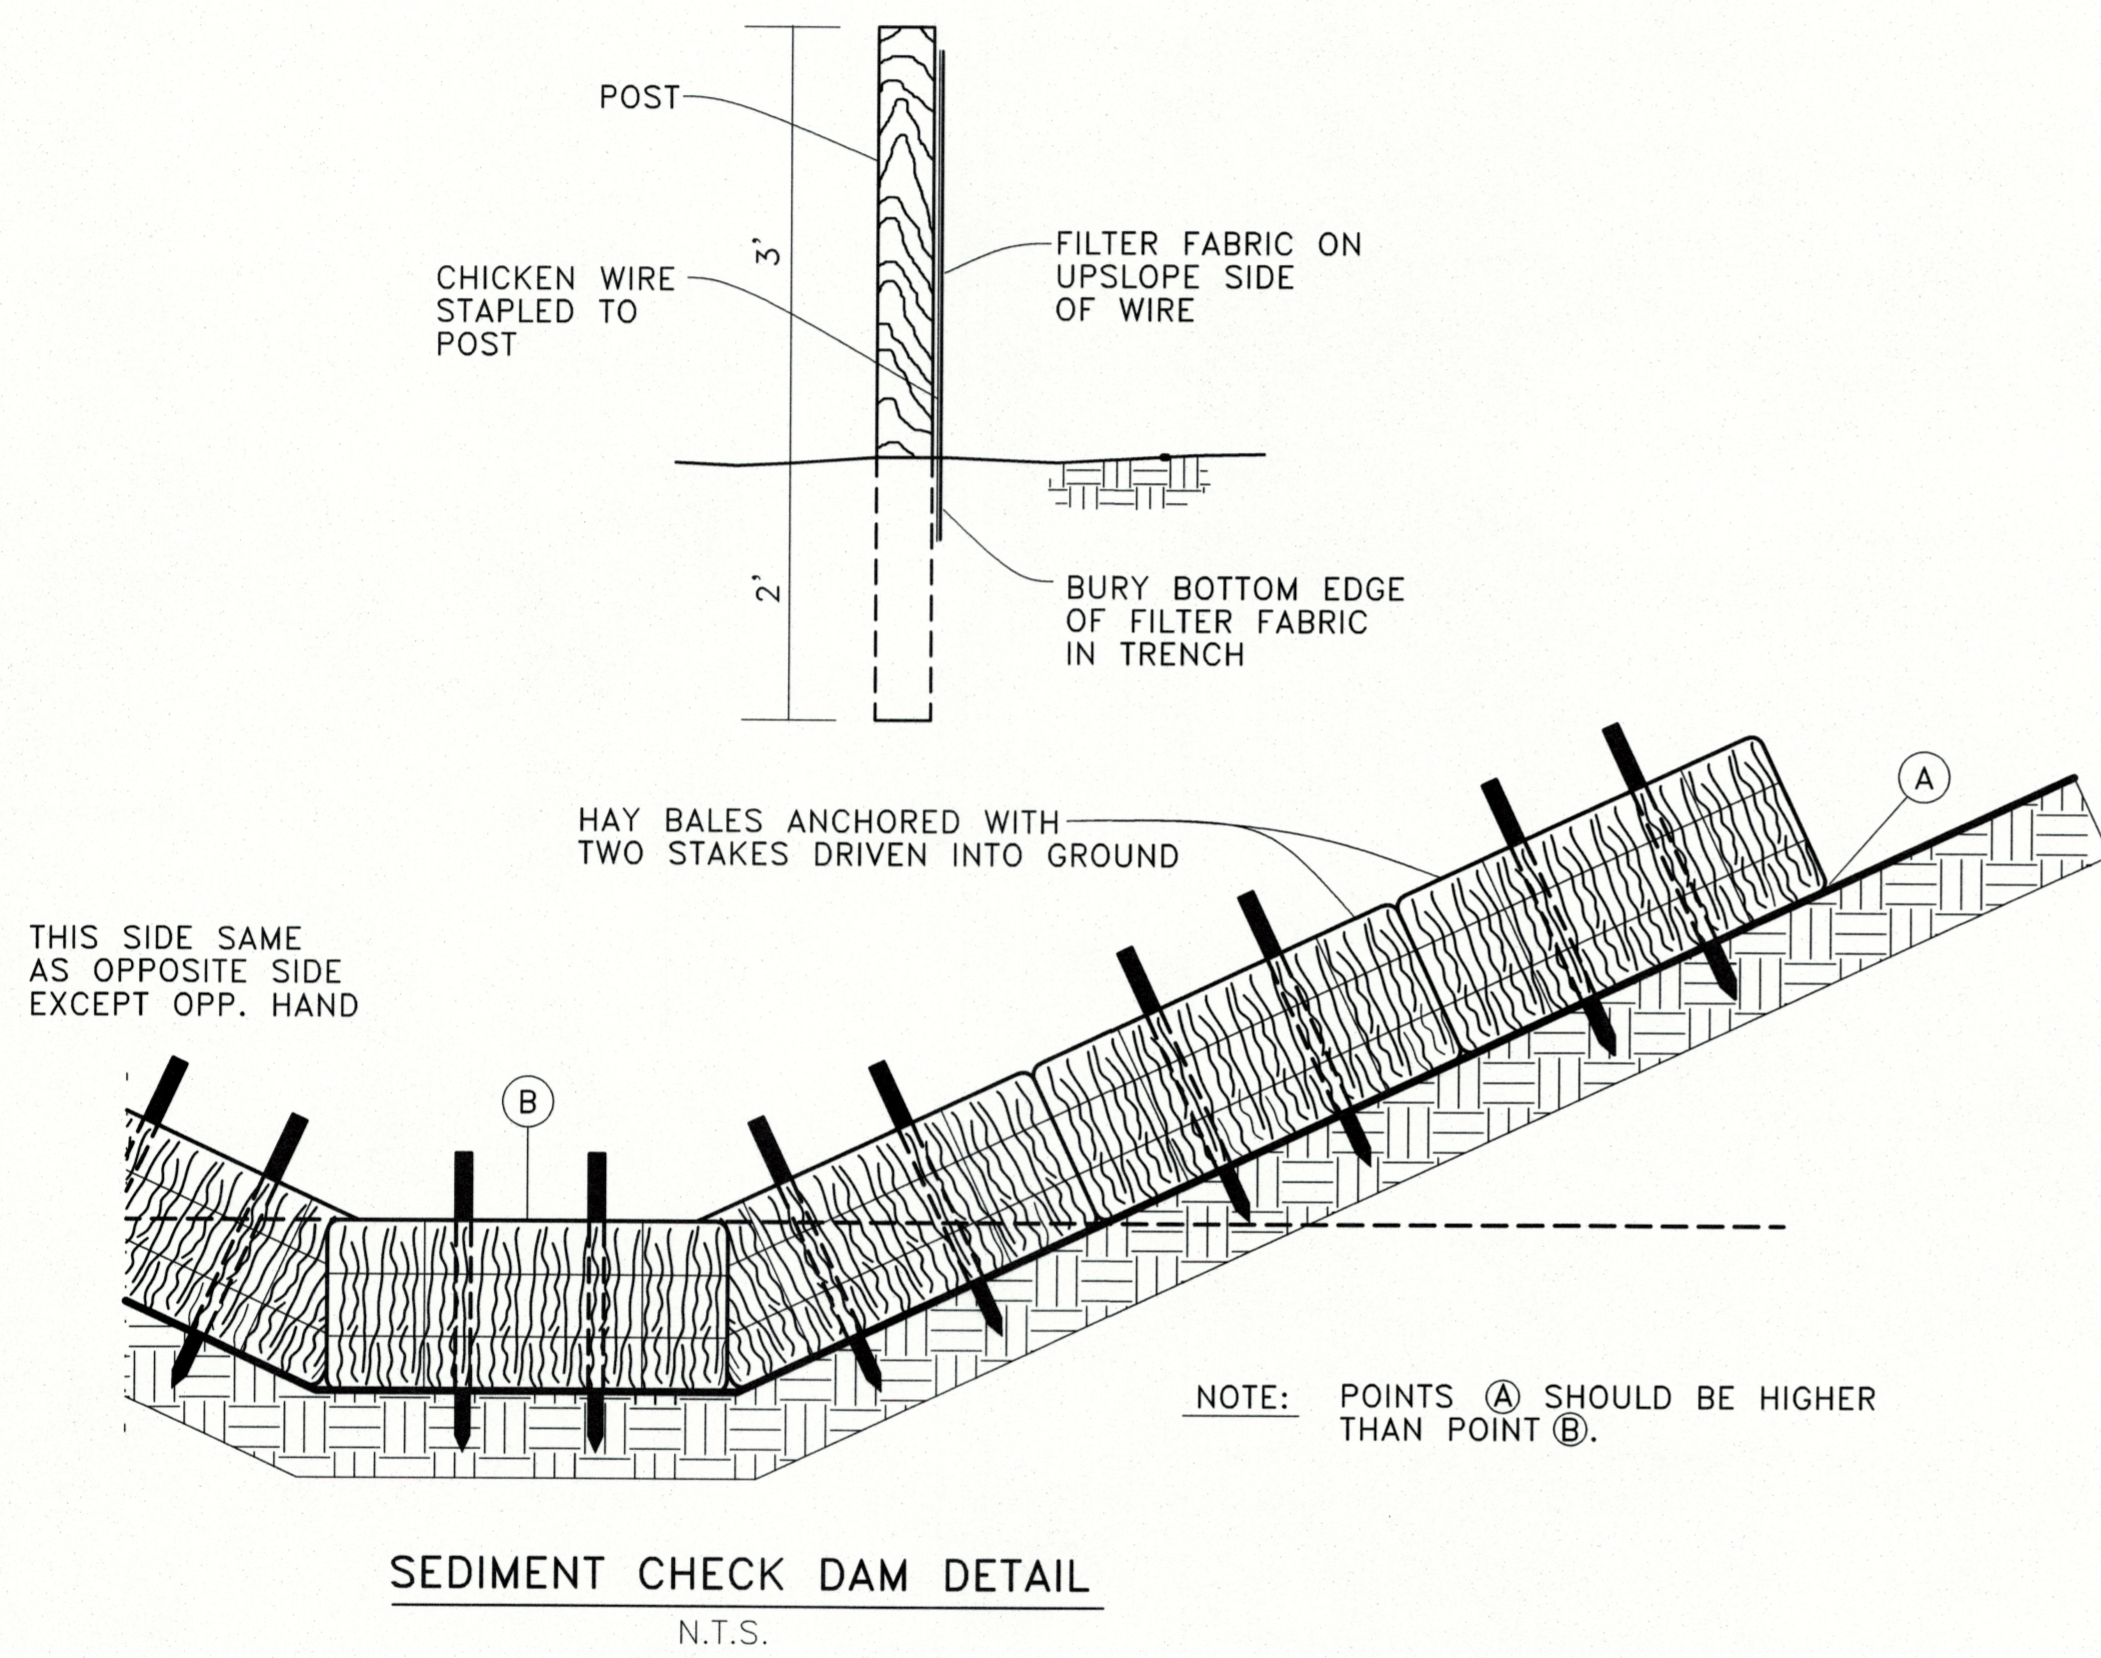



103 Cypress Street
West Monroe, Louisiana 71291
Tel: 338.998.1315 Fax: 338.998.1315 www.tbastudio.com



PROJECT:
INTERSTATE HYUNDAI
CONSTITUTION DRIVE, WEST MONROE, LOUISIANA

DRAWING REVISIONS	
DATE	DESCRIPTION

Drawn By: TDD
 Checked By: TMB
 SHEET
C1.02
 Date: MAY 2013
 Project No.: 12-0013
 File Name:
 DESCRIPTION:
 SITE PLAN