

NEW WELL AND EQUIPMENT SHALL BE FULLY ENCLOSED IN A 6' WOOD FENCE WITH LOCKING GATE.

NEW WELL  
6'X6' CONCRETE WELL PAD  
52'-0"

50' GRADED DRAINAGE RADIUS AROUND WELL HEAD. LAND SHALL SLOPE AWAY FROM WELL HEAD.

RAW WATER SAMPLING TAP  
MASTER VALVE  
CHECK VALVE

DUMPSTER PAD SEWER DRAIN

1-1/2" SDR26 PVC  
108'

1" BALL VALVE DRAIN LINE

STENNER CHLORINE INJECTOR AND 20 GAL DOUBLE WALLED CHLORINE STORAGE CONTAINER IN WELL HOUSE.

GREASE TRAP

WELL HOUSE WITH LOCKING DOOR

2 STORAGE TANKS (220 GAL EACH)

PRESSURE GAUGE

SAMPLE TAP, (SMOOTH BORE, TURNED DOWN)

TO DISTRIBUTION  
1-1/2" FLOW METER

6" NEW TREATMENT PLANT AND EQUIPMENT SHALL BE FULLY ENCLOSED IN A FENCE.

5000 GAL SEWER PLANT TABLET CHLORINATION

CHLORINE CONTACT TANK

UN-CU


100'-0"U

3 ENLARGED WELL PLAN  
SCALE: N.T.S.

4 ENLARGED WELL PLAN  
SCALE: N.T.S.

**DAMMON ENGINEERING, INC.**  
LOUISIANA & MISSISSIPPI  
www.dammonengineering.com  
info@dammon.com  
PH: 985.649.9832  
Chief Engineer: Brian Mestich, PE  
Sirelli, LA 70459

#	DESCRIPTION	DATE
1		

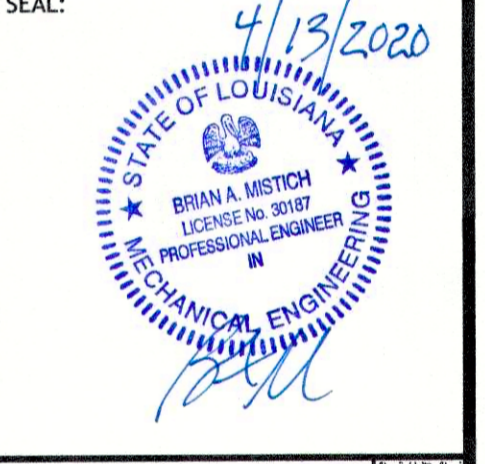

NEW RESTAURANT  
ABACURANT  
1938 LA HWY. 22 WEST  
MADISONVILLE, LA 70447  
JOB NO: 2349 | DATE: 09-16-2020  
DRAWN BY: BMM  
CHECKED BY: BMM

SHEET TITLE:  
WELL PLAN

DRAWING NUMBER:  
**W102**  
SHEET No: 1 of 2