## ARCHITECTURAL FLOOR PLAN

SCALE: 1/4"=1'-0"

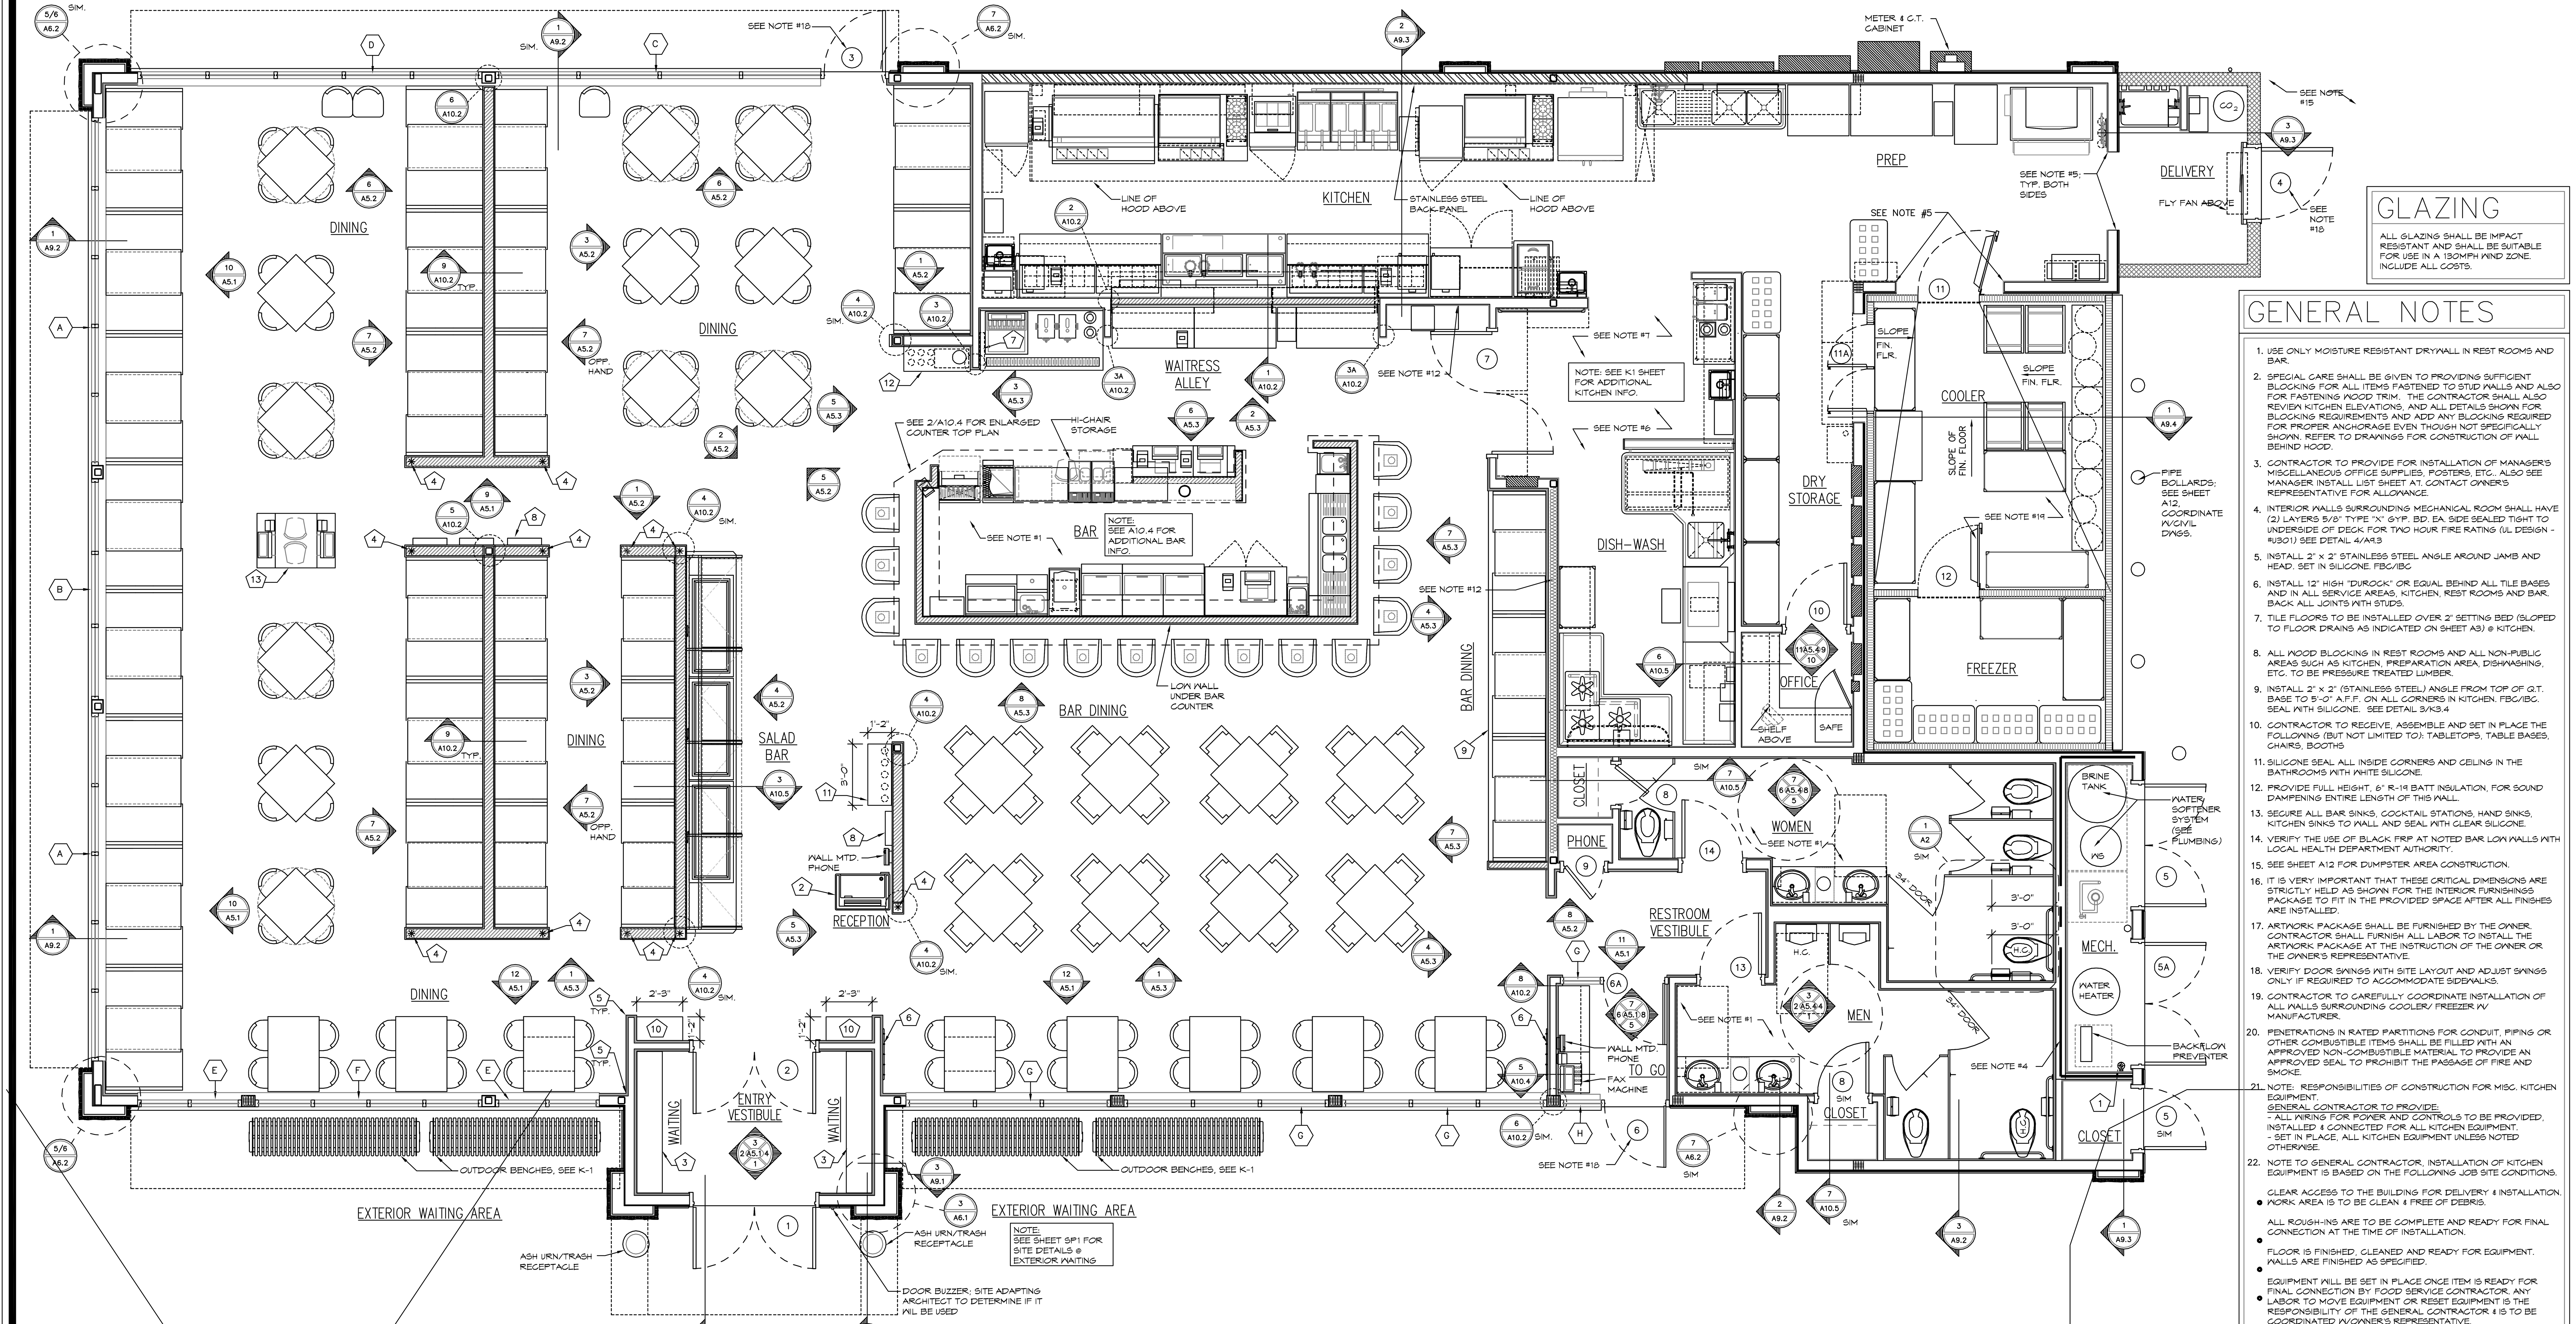


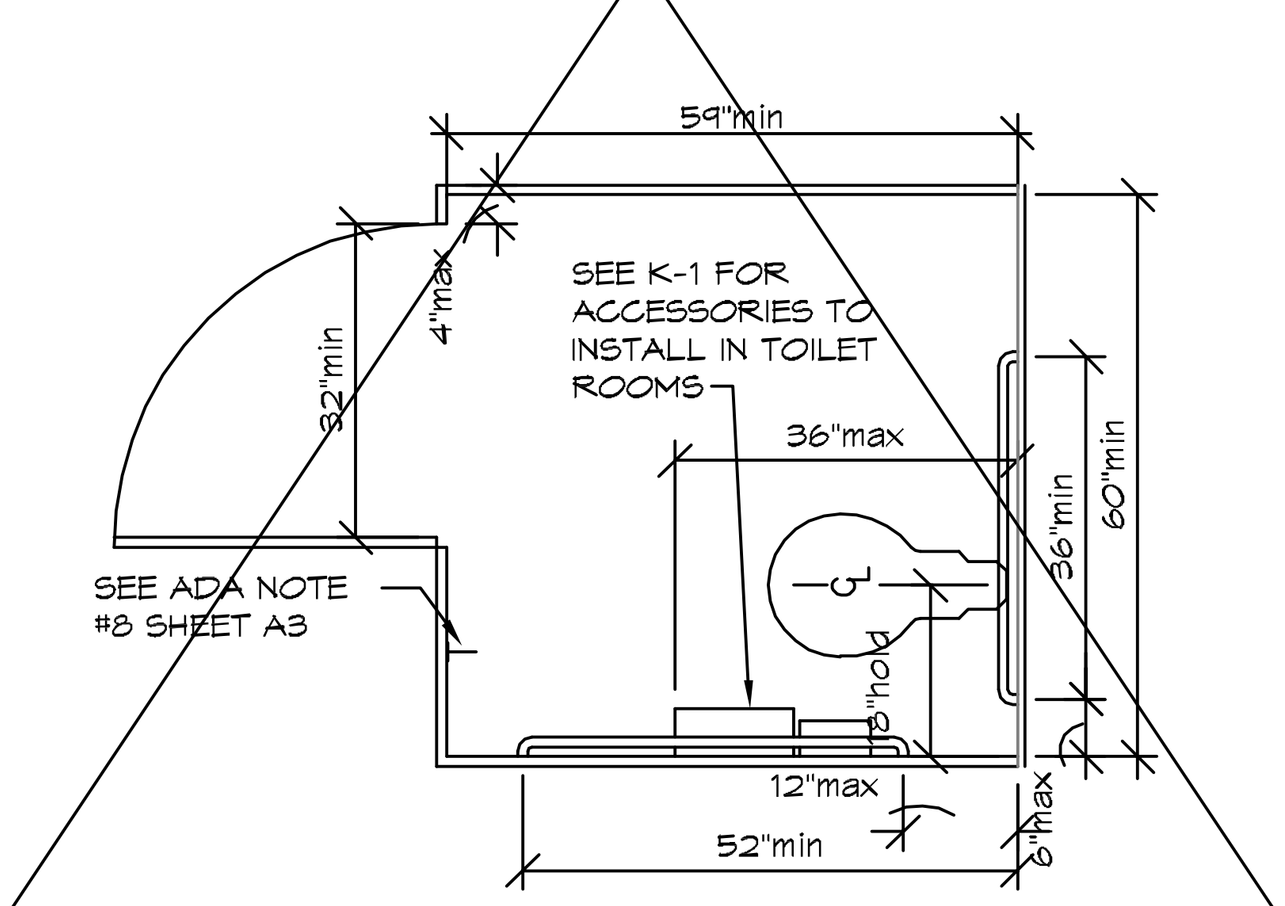


## TYP H.C. STALL PLAN

3/8"=1'-0"

## GLAZING

ALL GLAZING SHALL BE IMPACT RESISTANT AND SHALL BE SUITABLE FOR USE IN A 130MPH WIND ZONE. INCLUDE ALL COSTS.

## GENERAL NOTES

1. USE ONLY MOISTURE RESISTANT DRYWALL IN REST ROOMS AND BAR.
2. SPECIAL CARE SHALL BE GIVEN TO PROVIDING SUFFICIENT BLOCKING FOR ALL ITEMS FASTENED TO STUD WALLS AND ALSO FOR FASTENING WOOD TRIM. THE CONTRACTOR SHALL ALSO REVIEW KITCHEN ELEVATIONS, AND ALL DETAILS SHOWN FOR BLOCKING REQUIREMENTS AND ADD ANY BLOCKING REQUIRED FOR PROPER ANCHORAGE EVEN THOUGH NOT SPECIFICALLY SHOWN. REFER TO DRAWINGS FOR CONSTRUCTION OF WALL BEHIND HOOD.
3. CONTRACTOR TO PROVIDE FOR INSTALLATION OF MANAGER'S MISCELLANEOUS OFFICE SUPPLIES, POSTERS, ETC. ALSO SEE MANAGER INSTALL LIST SHEET A1. CONTACT OWNER'S REPRESENTATIVE FOR ALLOWANCE.
4. INTERIOR WALLS SURROUNDING MECHANICAL ROOM SHALL HAVE (2) LAYERS 5/8" TYPE "X" GYP. BD. EA. SIDE SEALED TIGHT TO UNDERSIDE OF DECK FOR TWO HOUR FIRE RATING (UL DESIGN - #U301) SEE DETAIL 4/A9.3
5. INSTALL 2" x 2" STAINLESS STEEL ANGLE AROUND JAMB AND HEAD. SET IN SILICONE. FBC/IBC
6. INSTALL 12" HIGH "DUROCK" OR EQUAL BEHIND ALL TILE BASES AND IN ALL SERVICE AREAS, KITCHEN, REST ROOMS AND BAR. BACK ALL JOINTS WITH STUDS.
7. TILE FLOORS TO BE INSTALLED OVER 2" SETTING BED (SLOPED TO FLOOR DRAINS AS INDICATED ON SHEET A3) @ KITCHEN.
8. ALL WOOD BLOCKING IN REST ROOMS AND ALL NON-PUBLIC AREAS SUCH AS KITCHEN, PREPARATION AREA, DISHWASHING, ETC. TO BE PRESSURE TREATED LUMBER.
9. INSTALL 2" x 2" (STAINLESS STEEL) ANGLE FROM TOP OF Q.T. BASE TO 5'-0" A.F.F. ON ALL CORNERS IN KITCHEN. FBC/IBC. SEAL WITH SILICONE. SEE DETAIL 3/K3.4
10. CONTRACTOR TO RECEIVE, ASSEMBLE AND SET IN PLACE THE FOLLOWING (BUT NOT LIMITED TO): TABLETOPS, TABLE BASES, CHAIRS, BOOTHS
11. SILICONE SEAL ALL INSIDE CORNERS AND CEILING IN THE BATHROOMS WITH WHITE SILICONE.
12. PROVIDE FULL HEIGHT, 6" R-19 BATT INSULATION, FOR SOUND DAMPENING ENTIRE LENGTH OF THIS WALL.
13. SECURE ALL BAR SINKS, COCKTAIL STATIONS, HAND SINKS, KITCHEN SINKS TO WALL AND SEAL WITH CLEAR SILICONE.
14. VERIFY THE USE OF BLACK FRP AT NOTED BAR LOW WALLS WITH LOCAL HEALTH DEPARTMENT AUTHORITY.
15. SEE SHEET A12 FOR DUMPSTER AREA CONSTRUCTION.
16. IT IS VERY IMPORTANT THAT THESE CRITICAL DIMENSIONS ARE STRICTLY HELD AS SHOWN FOR THE INTERIOR FURNISHINGS PACKAGE TO FIT IN THE PROVIDED SPACE AFTER ALL FINISHES ARE INSTALLED.
17. ARTWORK PACKAGE SHALL BE FURNISHED BY THE OWNER. CONTRACTOR SHALL FURNISH ALL LABOR TO INSTALL THE ARTWORK PACKAGE AT THE INSTRUCTION OF THE OWNER OR THE OWNER'S REPRESENTATIVE.
18. VERIFY DOOR SWINGS WITH SITE LAYOUT AND ADJUST SWINGS ONLY IF REQUIRED TO ACCOMMODATE SIDEWALKS.
19. CONTRACTOR TO CAREFULLY COORDINATE INSTALLATION OF ALL WALLS SURROUNDING COOLER/ FREEZER W/ MANUFACTURER.
20. PENETRATIONS IN RATED PARTITIONS FOR CONDUIT, PIPING OR OTHER COMBUSTIBLE ITEMS SHALL BE FILLED WITH AN APPROVED NON-COMBUSTIBLE MATERIAL TO PROVIDE AN APPROVED SEAL TO PROHIBIT THE PASSAGE OF FIRE AND SMOKE.
21. NOTE: RESPONSIBILITIES OF CONSTRUCTION FOR MISC. KITCHEN EQUIPMENT.
GENERAL CONTRACTOR TO PROVIDE:
- ALL WIRING FOR POWER AND CONTROLS TO BE PROVIDED, INSTALLED & CONNECTED FOR ALL KITCHEN EQUIPMENT.
- SET IN PLACE, ALL KITCHEN EQUIPMENT UNLESS NOTED OTHERWISE.
22. NOTE TO GENERAL CONTRACTOR. INSTALLATION OF KITCHEN EQUIPMENT IS BASED ON THE FOLLOWING JOB SITE CONDITIONS.
- CLEAR ACCESS TO THE BUILDING FOR DELIVERY & INSTALLATION. WORK AREA IS TO BE CLEAN & FREE OF DEBRIS.
- ALL ROUGH-INS ARE TO BE COMPLETE AND READY FOR FINAL CONNECTION AT THE TIME OF INSTALLATION.
- FLOOR IS FINISHED, CLEANED AND READY FOR EQUIPMENT. WALLS ARE FINISHED AS SPECIFIED.
- EQUIPMENT WILL BE SET IN PLACE ONCE ITEM IS READY FOR FINAL CONNECTION BY FOOD SERVICE CONTRACTOR. ANY LABOR TO MOVE EQUIPMENT OR RESET EQUIPMENT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR & IS TO BE COORDINATED W/OWNER'S REPRESENTATIVE.

## KEY NOTES

1. CONTRACTOR TO PROVIDE & INSTALL DRAWING TUBE FOR PERMANENT HOUSING OF AS-BUILT DRAWINGS. DRAWING TUBE SHALL BE 6" PVC W/GLUED BOTTOM CAP & SCREW ON TOP CAP. PROVIDE ATTACHMENT CHAIN TO CAP & TUBE. STRAP TO WALL W/PIPE STRAP OR EQUAL.
2. HOSTESS PODIUM- SEE DETAIL 7/A10.3
3. WAITING BENCH- SEE DETAIL 10/A10.2
4. ✱ INDICATES UNISTRUT SUPPORT POST SET IN CONCRETE AND INSTALLED AT ENDS OF ALL LOW WALL CONDITIONS SHOWN. SEE DETAIL 9/A10.2 FOR INSTALLATION.
5. TYP PNL-1 CORNER DETAIL- SEE DETAIL 1/A10.1
6. COAT HOOKS- SEE DETAIL 6/A10.1
7. NEWSPAPER DISPLAY CABINET- SEE DETAIL 7/A10.1
8. MENU HOLDER- SEE DETAIL 8/A10.1
9. RAISED PLATFORM BOOTH SEATING- SEE DETAIL 12/A10.2
10. SERVICE CABINET- SEE DETAIL 4/A10.5
11. SERVICE CABINET- SEE DETAIL 5/A10.5
12. SERVICE CABINET- SEE DETAIL 8/A10.5
13. SERVICE CABINET- SEE DETAIL 9/A10.5

## LEGEND

(#) WINDOW TYPES; SEE SHEET A8.1

(#) DOOR TYPES; SEE SHEET A8.1

| MARK | REVISION | DATE |
|---|---|---|
| . | GLAZING | 8.24.05 |
| . | . | . |

SEAL

ARCHITECT
RANDY REYNOLDS ARCHITECT
252 POTEAT PL[illegible] FRANKLIN, TENNE[illegible] 37064
PHONE (615) [illegible]675 * FAX (615) 59[illegible]

Ruby Tuesday

# ARCHITECTURAL FLOOR PLAN

# RUBY TUESDAY # 4734

I-10E SERVICE ROAD at TYLER DRIVE (I-10 at Gause Blvd)
SLIDELL LOUISIANA

RRA PROJECT NUMBER 0521
ISSUE FOR REVIEW JULY 22, 2005
ISSUE FOR CONSTRUCTION .
CHECKED BY RR
SCALE AS NOTED
SHEET NUMBER A-2