


Flexible Duct—Straight Run Friction Loss Per 100 Ft.

Air Volume—Cubic Feet Per Minute

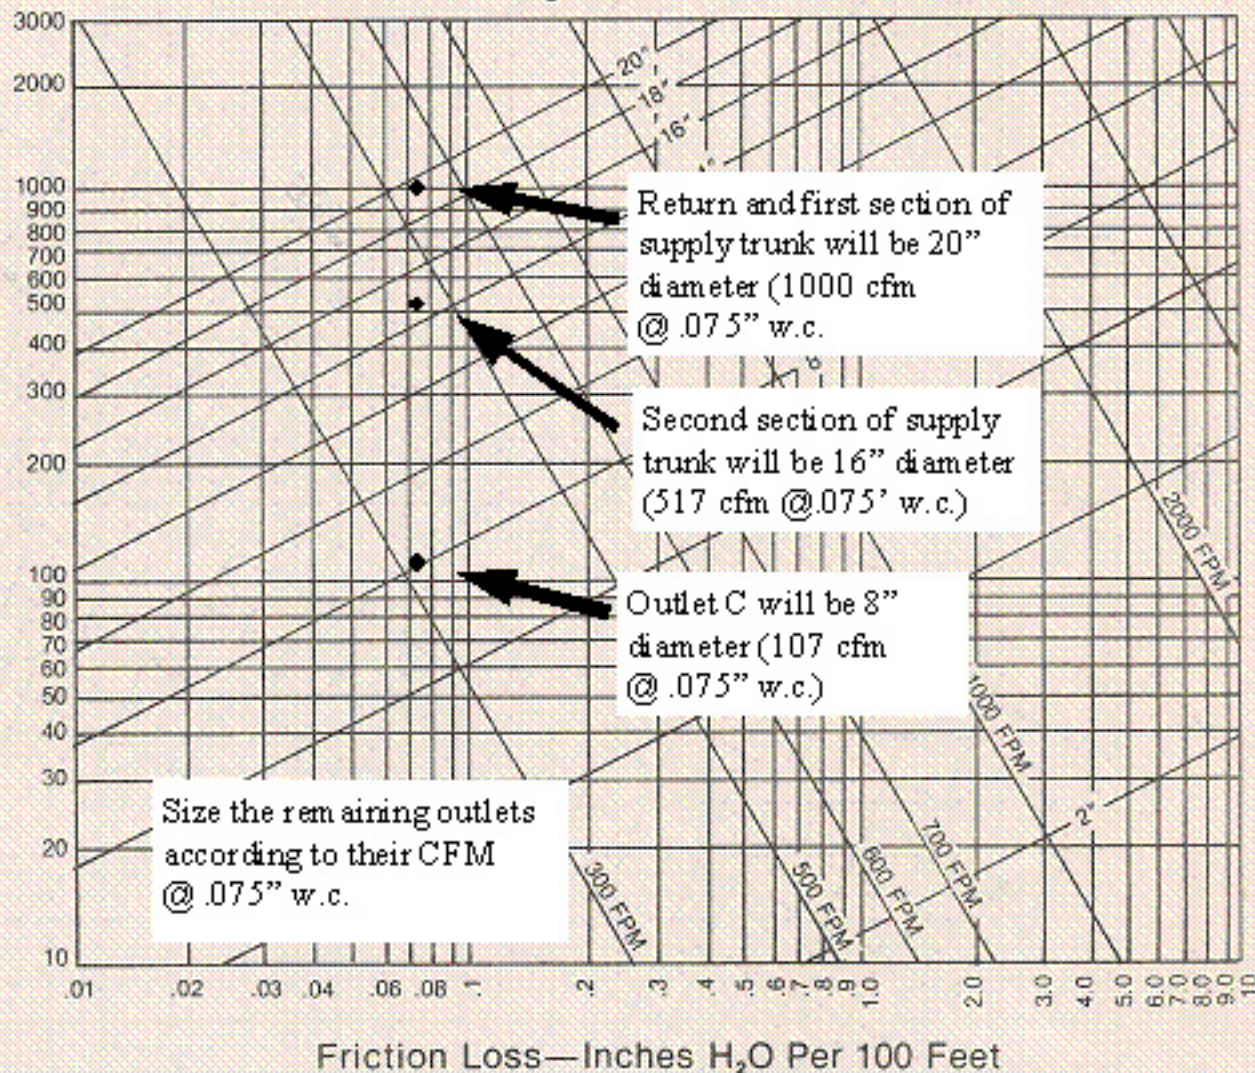

Return and first section of supply trunk will be 20" diameter (1000 cfm @ .075" w.c.)

Second section of supply trunk will be 16" diameter (517 cfm @ .075" w.c.)

Outlet C will be 8" diameter (107 cfm @ .075" w.c.)

Size the remaining outlets according to their CFM @ .075" w.c.