

Submittal Data: System 42RCLX AUU42RCLX & AOU42RLX



Job Name:	Location:			
Purchaser:				
Engineer:				
Submitted To:	For:	☐ Reference	☐ Approval	☐ Construction
Submitted By:				

Capacities:

Cooling	42,700 BTU/h
Min/Max Cooling	13,700-45,000BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
Heating	45,200 BTU/h
Min/Max Heating	14,300-54,600BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	8.5
SEER	15.0
EER <i>Cooling/Heating</i>	9.2/10.5
Low Ambient Temp. <i>F° Cooling/Heating</i>	0/0
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/</i>	50/48/44
Noise Level Heating <i>db (A) - H/ M/ L</i>	50/48/44
Weight	88 lbs.
Total Height	9-3/4 in.
Space required above ceiling	8-1/2 in.

Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	55/56
Recommended Fuse Size	30A
Min. Ampacity	26A
Running Current Cooling (<i>Rated/Max</i>)	20.3/21.7
Running Current Heating (<i>Rated/Max</i>)	19.1/21.7
Weight	231 lbs.

Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	230 ft. each
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

Note: Figures are based on 230 Volts

OUTLINE AND DIMENSIONS

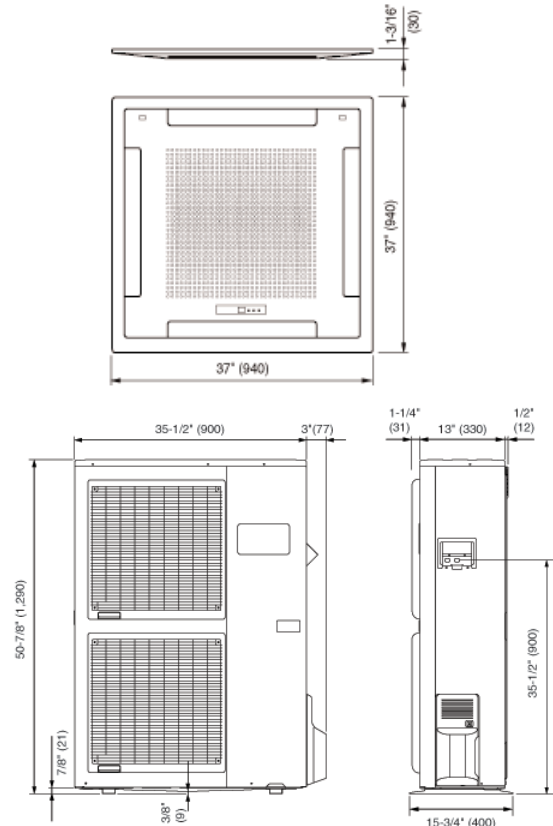

Standard Features:

- ♦ Six year compressor warranty
- ♦ Two year parts warranty
- ♦ Weekly timer
- ♦ Auto Louver: Up/Down
- ♦ Energy saver; Slender Fit
- ♦ Pump Down Operation
- ♦ Full Function Wired Remote Control
- ♦ Cold Prevention
- ♦ Built in Low Ambient
- ♦ Auto Restart/ Reset
- ♦ Refrigerant R410A
- ♦ High Ceiling Mode
- ♦ Branch Duct Capable
- ♦ Auto Mode; Quiet Mode; Dry Mode

Notes: