


Features Of All Styles Of Mueller® Bronze Saddles For O.D. Controlled PVC Pipe

- ❑ **THICK TAPPING BOSS** – precision machined for a pressure tight connection that resists pull-out. Generous wrenching surfaces to provide sure grip while installing corporation valve.



- ❑ **NITRILE O-RING SEALED** – glued in place and confined in a groove to resist cold-flow or distortion and provide a pressure tight seal against the main.

- ❑ **SILICON BRONZE SCREWS** – for strength and corrosion resistance (also hinge pin on swing hinge style).

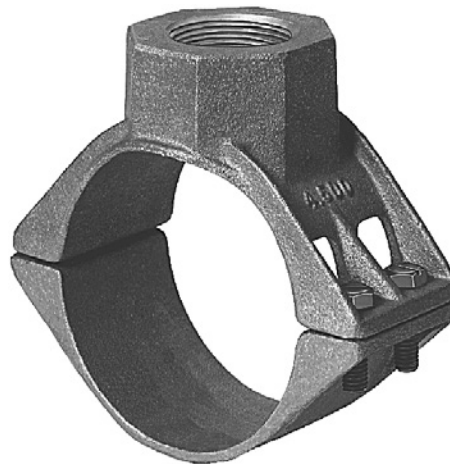

- ❑ **WIDE STRAP** – is specially shaped to fit the contour of the O.D. controlled plastic main and seal dependably without pipe distortion. Double-wide straps on saddles with 1-1/2" or 2" tapped outlets for added stability.

- ❑ **MANUFACTURED AND TESTED** – in accordance with all applicable parts of ANSI/AWWA C800-NSF 61 Certified.



Rev. 5-11 Shaded area indicates change.

MUELLER® Bronze Service Saddles for cast iron, ductile iron, A-C pipe, & AWWA C900 PVC plastic pipe.

- ❑ **THICK TAPPING BOSS** – precision machined for a pressure tight connection that resists pull-out.
- ❑ **HEAVY BODY** – provides strength at critical stress points. Constructed of 85-5-5-5 ASTM B62 brass.
- ❑ **STRAPS** – Silicon Bronze are flattened to provide increased gripping surface. 304L stainless steel - for additional pipe support.*



- ❑ **ROLLED STRAP THREADS** – for added strength.
- ❑ **MANUFACTURED AND TESTED** – in accordance with all applicable parts of ANSI/AWWA C800 – NSF 61 Certified.
- ❑ **NITRILE O-RING GASKET** – is cemented in place and confined in a retaining groove, for pressure tight seal on the main.
- ❑ **BODY CURVATURE** – designed to fit pipe accurately for secure clamping and uniform sealing pressure.

*Stainless steel strap recommended for saddle used on AWWA OD C900 PVC.

MUELLER® Ductile Iron Service Saddles for cast iron, ductile iron, steel, A-C pipe, & AWWA C900 PVC plastic pipe.

- ❑ **THICK TAPPING BOSS** – precision machined for a pressure tight connection that resists pull-out.
- ❑ **HEAVY BODY** – provides strength at critical stress points. Constructed of ASTM A536 ductile iron.
- ❑ **STRAPS** – Forged alloy steel straps – are zinc plated and are extra large and flattened to provide increased gripping surface. 304L Stainless steel - for additional pipe support.*



- ❑ **ROLLED STRAP THREADS** – for added strength.
- ❑ **MANUFACTURED AND TESTED** – in accordance with all applicable parts of ANSI/AWWA C800 – NSF 61 Certified.
- ❑ **NITRILE O-RING GASKET** – is cemented in place and confined in a retaining groove, for pressure tight seal on the main.
- ❑ **BODY CURVATURE** – designed to fit pipe accurately for secure clamping and uniform sealing pressure.
- ❑ **NYLON 11** – fluidized bed applied, 10-12 mil thick coating is standard - superior corrosion resistance, non-conductive, and unique capability to flex with saddle as it is tightened to conform to pipe OD.

*Stainless steel strap recommended for saddle used on AWWA OD C900 PVC.

WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

MUELLER® SS Series Stainless Steel Service Saddle for 4" through 12" cast iron, ductile iron, steel and PVC plastic pipe.

- ❑ **SELECTION** - Available with single stud, 3/4" and 1" tapping boss (CC or IP); or double stud, 3/4", 1", 1-1/4", 1-1/2" and 2" tapping boss (CC or IP). Offered in both 5" and 7-1/2" lengths.
- ❑ **SHELL** - 304L stainless steel shell is cut to exacting tolerances. Low carbon chemistry minimizes carbon precipitation corrosion.



- ❑ **NSF 61 Certified**
- ❑ **STUDS, NUTS & WASHERS** - Studs are 304 stainless steel with spin-fit threads. Nuts are also heavy hex 304 stainless steel and have an anti-galling compound coating. 304 stainless washers prevent galling and facilitate tightening.
- ❑ **NITRILE GASKET** - Ribbed gasket covers saddle edge to edge. Multiple concentric ribs for a dependable pressure tight seal.
- ❑ **FINGER LUGS** - 304L stainless finger lug design
- ❑ **WELDING** - State-of-the-art robotic MIG welds are continuous bead to provide superior strength.
- ❑ **PRESSURE RATING** -150 psig (1034 kPa)

4.4



MUELLER® H-13000 & S-13000 SERIES BRONZE SERVICE SADDLES FOR C900 PVC PIPE

Rev. 5-11 Shaded area indicates change.

MUELLER® Service Saddles for AWWA C900 PVC pipe

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. (F.I.P.T.) thread
- For use on cast iron O.D. PVC pipe made to ANSI/AWWA C900 standard
- 3/4" - 2" tap sizes
- NSF 61 Certified



S-13000 Series
2-piece hinged
4"-8" mains;
3/4" to 1"
tapping



H-13000 Series
2-piece
4"-8" mains;
3/4" to 1"
tapping



H-13000 Series
2-piece
4"-8" mains;
1/2" or 2"
tapping



H-13000 Series
2-piece
10" & 12" mains;
3/4" to 2"
tapping

MUELLER® Service Saddles for cast iron O.D. PVC pipe

Nominal Main Size	Type Of Thread In Service Saddle Outlet											Design	
	AWWA Taper Thread (C.C.)					Design	AWWA Iron Pipe Thread (F.I.P.T)						Design
	Catalog Number	Tapping Size					Catalog number	Tapping Size					
3/4"		1"	1-1/2"	2"	3/4"	1"		1-1/2"	2"				
4"	S-13440	X	X	-	-	Two-piece	S-13490	X	X	-	-	Two-piece	
4"	H-13440	X	X	X	X		H-13490	X	X	X	X		
6"	S-13441	X	X	-	-		S-13491	X	X	-	-		
6"	H-13441	X	X	X	X		H-13491	X	X	X	X		
8"	S-13442	X	X	-	-		S-13492	X	X	-	-		
8"	H-13442	X	X	X	X		H-13492	X	X	X	X		
10"	H-13443	X	X	X	X		H-13493	X	X	X	X		
12"	H-13444	X	X	X	X		H-13494	X	X	X	X		

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size			
	3/4"	1"	1-1/2"	2"
E-5™	X	X	X	X
D-5™	X	X	X	X
TRU-CUT™	X	X	-	-
MEGA-CUT™	X	X	X	X
PL-2™	X	X	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.

MUELLER® H-13000 & S-13000 SERIES BRONZE SERVICE SADDLES FOR IPS PVC PIPE



4.5

Shaded area indicates change. Rev. 5-11

MUELLER® Service Saddles for iron pipe size PVC pipe

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. (F.I.P.T.) thread
- For use on IPS PVC pipe (O.D. controlled)
- 3/4" - 2" tap sizes
- NSF 61 Certified



S-13000 Series
2-piece hinged
2" to 8" mains;
3/4" to 1" tapping



H-13000 Series
2-piece
2" to 8" mains;
3/4" to 1" tapping



H-13000 Series
2-piece
4"-8" mains;
1-1/2" or 2"
tapping



H-13000 Series
3-piece
10" & 12" mains;
3/4" to 1"
tapping

MUELLER® Service Saddles for IPS PVC pipe

Nominal Main Size	Type Of Thread In Service Saddle Outlet											
	Awwa Taper Thread (C.C.)					Design	Awwa Iron Pipe Thread (F.I.P.T.)				Design	
	Catalog Number	Tapping Size					Catalog Number	Tapping Size				
3/4"		1"	1-1/2"	2"	3/4"	1"		1-1/2"	2"			
2"	S-13420	X	X	-	-	Two piece	S-13470	X	X	-	-	Two piece
2"	H-13420	X	X	-	-		H-13470	X	X	-	-	
2-1/2"	S-13422	X	X	-	-		S-13472	X	X	-	-	
2-1/2"	H-13422	X	X	-	-		H-13472	X	X	-	-	
3"	S-13425	X	X	-	-		S-13475	X	X	-	-	
3"	H-13425	X	X	-	-		H-13475	X	X	-	-	
4"	S-13428	X	X	-	-		S-13478	X	X	-	-	
4"	H-13428	X	X	X	X		H-13478	X	X	X	X	
6"	S-13431	X	X	-	-		S-13481	X	X	-	-	
6"	H-13431	X	X	X	X		H-13481	X	X	X	X	
8"	S-13433	X	X	-	-		S-13483	X	X	-	-	
8"	H-13433	X	X	X	X		H-13483	X	X	X	X	
10"	H-13434	X	X	-	-	Three piece	H-13484	X	X	-	-	Three piece
12"	H-13435	X	X	-	-		H-13485	X	X	-	-	

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size			
	3/4"	1"	1-1/2"	2"
E-5™	X	X	X	X
D-5™	X	X	X	X
TRU-CUT™	X	X	-	-
MEGA-CUT™	X	X	X	X
PL-2™	X	X	-	-

4.6



MUELLER® BR1B SERIES BRONZE SERVICE SADDLES - SINGLE STRAP

Rev. 12-09

MUELLER® Service Saddles for use on A-C, cast iron, ductile iron pipe

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- For use on A-C pipe, cast iron or ductile iron pipe
- 200 psig (1379 kPa) maximum working pressure
- Available in single strap designs
- Brass body
- Flattened silicon bronze straps
- Roll strap threads
- O-ring sealed outlet
- 1/2" thru 1" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



BR 1 B Series

MUELLER® Service Saddles with Bronze Single Strap

Pipe O.D. Range*		Kind and Size of Pipe			Bronze Single Straps				
Inch	mm	A-C	Cast or Ductile Iron	Tap***	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)			
						1/2"	5/8"	3/4"	1"
4.74-5.32	121.0-135.0	**	4"	CC or IP	BR1B0474	062	075	075	100
6.84-7.45	174.0-189.0		6"	CC or IP	BR1B0684	062	075	075	100
8.99-9.67	229.0-245.0		8"	CC or IP	BR1B0899	062	075	075	100
11.04-12.12	281.0-307.0		10"	CC or IP	BR1B1104	062	075	075	100
13.14-14.58	334.0-370.0		12"	CC or IP	BR1B1314	062	075	075	100

*A-C pipe, classes 150-200 per ASTM C295 and AWWA C400 – actual O.D. of pipe being used must fall within the pipe O.D. range listed in the preceding charts. Centrifugally cast pipe, classes 50-250 per ANSI/AWWA C102/A21.2; ANSI/AWWA C106/A21.6; ANSI/AWWA C108/A21.8, and Federal specification WW-P-421. Ductile iron pipe, classes 50-56 per ANSI/AWWA C151/A21.51; Cast iron O.D. PVC plastic pipe per AWWA C900.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer, to make certain you select the proper clamp: 1) Determine the O.D. of the pipe at the point of saddle installation; 2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service saddle tap size			
	1/2"	5/8"	3/4"	1"
E-5™	X	X	X	X
D-5™	-	-	X	X
TRU-CUT™	-	-	X	X
MEGA-CUT™	X	X	X	X
PL-2	-	-	X	X

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER

⚠ WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

MUELLER® BR1S SERIES BRONZE SERVICE SADDLES - SINGLE STRAP

Mueller Co.

4.7

Rev. 12-09

MUELLER® Service Saddles for use on A-C, cast iron, ductile iron, and AWWA C900 PVC plastic pipe

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- For use on A-C pipe, cast iron or ductile iron pipe and C900 PVC pipe
- 200 psig (1379 kPa) maximum working pressure
- Available in single strap designs
- Brass body
- 304L stainless steel straps
- Roll strap threads
- O-ring sealed outlet
- 1/2" thru 1" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



BR 1 S Series

MUELLER® Service Saddles with Stainless Steel Single Strap

Pipe O.D. Range*		Kind and Size of Pipe			Stainless Steel Single Straps				
Inch	mm	A-C	Cast or Ductile Iron, C900 PVC	Tap*** Thread	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)			
						1/2"	5/8"	3/4"	1"
4.74-5.32	121.0-135.0	**	4"	CC or IP	BR1S0474	050	062	075	100
6.84-7.45	174.0-189.0		6"	CC or IP	BR1S0684	050	062	075	100
8.99-9.67	229.0-245.0		8"	CC or IP	BR1S0899	050	062	075	100
11.04-12.12	281.0-307.0		10"	CC or IP	BR1S1104	050	062	075	100
13.14-14.58	334.0-370.0		12"	CC or IP	BR1S1314	050	062	075	100

*A-C pipe, classes 150-200 per ASTM C295 and AWWA C400 – actual O.D. of pipe being used must fall within the pipe O.D. range listed in the preceding charts. Centrifugally cast pipe, classes 50-250 per ANSI/AWWA C102/A21.2; ANSI/AWWA C106/A21.6; ANSI/AWWA C108/A21.8, and Federal specification WW-P-421. Ductile iron pipe, classes 50-56 per ANSI/AWWA C151/A21.51; Cast iron O.D. PVC plastic pipe per AWWA C900.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer., to make certain you select the proper clamp: 1) Determine the O.D. of the pipe at the point of saddle installation; 2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service saddle tap size			
	1/2"	5/8"	3/4"	1"
E-5™	X	X	X	X
D-5™	-	-	X	X
TRU-CUT™	-	-	X	X
MEGA-CUT™	X	X	X	X
PL-2	-	-	X	X

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER

WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

4.8



MUELLER® BR2B SERIES BRONZE SERVICE SADDLES - DOUBLE STRAP

Rev. 12-09 Shaded area indicates change

MUELLER® Service Saddles for use on A-C, cast iron, ductile iron

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- For use on A-C pipe, cast iron or ductile iron pipe and cast iron O.D.
- 200 psig (1379 kPa) maximum working pressure
- Available in double strap designs
- Brass body
- Flattened silicon bronze straps
- Rolled strap threads
- O-ring sealed outlet
- 3/4" thru 2" tap sizes (1/2" and 5/8" some styles)
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



BR 2 B Series

MUELLER® Service Saddles with Bronze Double Straps

Pipe O.D. Range*		Kind and Size of Pipe			Bronze Double Straps							
Inch	mm	A-C	Cast or Ductile Iron	Tap*** Thread	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)						
						1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
4.74-5.32	121.0-135.0	**	4"	CC or IP	BR2B0474	050	062	075	100	-	-	-
4.74-5.10	121.0-129.4		4"	CC or IP	BR2B0474	-	-	-	-	125	150	200
5.10-5.60	129.4-142.2		4"	CC or IP	BR2B0510	-	-	-	-	125	150	200
6.84-7.45	174.0-189.0		6"	CC or IP	BR2B0684	050	062	075	100	125	150	200
8.99-9.67	229.0-245.0		8"	CC or IP	BR2B0899	050	062	075	100	125	150	200
11.04-12.12	281.0-307.0		10"	CC or IP	BR2B1104	050	062	075	100	125	150	200
13.14-14.58	334.0-370.0		12"	CC or IP	BR2B1314	050	062	075	100	125	150	200
15.22-16.88	386.6-428.7		14"	CC or IP	BR2B1522	-	-	075	100	-	150	200
17.32-19.19	439.9-487.4		16"	CC or IP	BR2B1732	-	-	075	100	-	150	200
18.00-19.50	457.2-495.3		18"	CC or IP	BR2B1800	-	-	075	100	125	150	200
20.00-24.30	508.0-624.8		20"	CC or IP	BR2B2000	-	-	075	100	125	150	200
24.00-25.80	609.6-655.3		24"	CC or IP	BR2B2400	-	-	075	100	125	150	200

*A-C pipe, classes 150-200 per ASTM C295 and AWWA C400 – actual O.D. of pipe being used must fall within the pipe O.D. range listed in the preceding charts. Centrifugally cast pipe, classes 50-250 per ANSI/AWWA C102/A21.2; ANSI/AWWA C106/A21.6; ANSI/AWWA C108/A21.8, and Federal specification WW-P-421. Ductile iron pipe, classes 50-56 per ANSI/AWWA C151/A21.51; Cast iron O.D. PVC plastic pipe per AWWA C900.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer., to make certain you select the proper clamp: 1) Determine the O.D. of the pipe at the point of saddle installation; 2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size						
	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
E-5™	X	X	X	X	X	X	X
D-5™	-	-	X	X	X	X	X
TRU-CUT™	-	-	X	X	-	-	-
MEGA-CUT™	X	X	X	X	X	X	X
PL-2™	-	-	X	X	-	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER

WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

MUELLER® BR2S & BR2W SERIES BRONZE SERVICE SADDLES - DOUBLE STRAP



4.9

Shaded area indicates change Rev. 12-09

MUELLER® Service Saddles for use on A-C, cast iron, ductile iron, and AWWA C900 PVC plastic pipe

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- For use on A-C pipe, cast iron or ductile iron pipe and cast iron O.D. PVC pipe
- 200 psig (1379 kPa) maximum working pressure
- Available in double strap designs
- Brass body
- Flattened silicon bronze straps (standard)
- Optional 304L stainless steel straps
- Rolled strap threads
- O-ring sealed outlet
- 3/4" thru 2" tap sizes (1/2" and 5/8" some styles)
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



BR 2 S Series
BR 2 W Series

MUELLER® Service Saddles with Stainless Steel Double Straps

Pipe O.D. Range*		Kind and Size of Pipe			Stainless Steel Double Straps							
Inch	mm	A-C	Cast or Ductile Iron, C900 PVC	Tap*** Thread	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)						
						1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
4.74-5.32	121.0-135.0	**	4"	CC or IP	BR2S0474	050	062	075	100	-	-	-
4.74-5.10	121.0-129.4		4"	CC or IP	BR2S0474	-	-	-	-	125	150	200
5.10-5.60	129.4-142.2		4"	CC or IP	BR2S0510	-	-	-	-	125	150	200
6.84-7.45	174.0-189.0		6"	CC or IP	BR2S0684	050	062	075	100	125	150	200
8.99-9.67	229.0-245.0		8"	CC or IP	BR2S0899	050	062	075	100	125	150	200
11.04-12.12	281.0-307.0		10"	CC or IP	BR2S1104	050	062	075	100	125	150	200
13.14-14.58	334.0-370.0		12"	CC or IP	BR2S1314	050	062	075	100	125	150	200
15.22-16.88	386.6-428.7		14"	CC or IP	BR2S1522	-	-	075	100	-	150	200
17.32-19.19	439.9-487.4		16"	CC or IP	BR2S1732	-	-	075	100	-	150	200
18.00-19.50	457.2-495.3		18"	CC or IP	BR2W1800	-	-	075	100	125	150	200
20.00-24.30	508.0-624.8		20"	CC or IP	BR2W2000	-	-	075	100	125	150	200
24.00-25.80	609.6-655.3		24"	CC or IP	BR2W2400	-	-	075	100	125	150	200

*A-C pipe, classes 150-200 per ASTM C295 and AWWA C400 – actual O.D. of pipe being used must fall within the pipe O.D. range listed in the preceding charts. Centrifugally cast pipe, classes 50-250 per ANSI/AWWA C102/A21.2; ANSI/AWWA C106/A21.6; ANSI/AWWA C108/A21.8, and Federal specification WW-P-421. Ductile iron pipe, classes 50-56 per ANSI/AWWA C151/A21.51; Cast iron O.D. PVC plastic pipe per AWWA C900.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer, to make certain you select the proper clamp: 1) Determine the O.D. of the pipe at the point of saddle installation; 2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size						
	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
E-5™	X	X	X	X	X	X	X
D-5™	-	-	X	X	X	X	X
TRU-CUT™	-	-	X	X	-	-	-
MEGA-CUT™	X	X	X	X	X	X	X
PL-2™	-	-	X	X	-	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER



WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

Rev. 5-11 Shaded area indicates change.

Nylon Ductile Iron Service Saddles for use on cast iron, ductile iron, AWWA C900 PVC plastic, steel and A-C pipe

- Outlet tapped with AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- Single strap design rated at 250 psig (1724 kPa) maximum working pressure
- ASTM A536 ductile iron body
- Body is Nylon 11 (10 -12 mil)
- 304L stainless steel strap
- Rolled strap threads
- Nitrile O-ring gasket
- 1/2" thru 2" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



DR 1 S Series

MUELLER® Service Saddles with Stainless Steel Single Strap

Pipe O.D. Range*		Kind and Size of Pipe				Single Stainless Steel Strap						
Inch	mm	A-C	Std. Steel, IPS PVC	Cast Iron, Ductile Iron C900 PVC	Tap*** Thread	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)					
							1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
2.35-2.50	59.7-63.5	**	2"	2"*	CC or IP	DR1S0235	050	075	100	-	-	-
2.85-2.91	72.4-73.9		2-1/2"	2-1/2"*	CC or IP	DR1S0285	050	075	100	-	-	-
3.56-4.00	91.0-101.0		3-1/2"	3"	CC or IP	DR1S0356	050	075	100	-	-	-
4.47-5.32	113.5-135.1		4"	4"	CC or IP	DR1S0447	050	075	100	125	150	200
6.59-7.37	167.4-187.2		6"	6"	CC or IP	DR1S0659	050	075	100	125	150	200
8.54-9.79	216.9-248.7		8"	8"	CC or IP	DR1S0845	050	075	100	125	150	200
10.64-12.12	270.3-307.8		10"	10"	CC or IP	DR1S1064	050	075	100	-	-	-
12.62-14.38	320.5-365.3		12"	12"	CC or IP	DR1S1262	050	075	100	-	-	-

* Important—carefully check the range of the saddle with the O.D. of the pipe being used.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer, to make certain you select the proper clamp:

1) Determine the O.D. of the pipe at the point of saddle installation;

2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size					
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
E-5™	X	X	X	X	X	X
D-5™	-	X	X	X	X	X
TRU-CUT™	-	X	X	-	-	-
MEGA-CUT™	X	X	X	X	X	X
PL-2™	-	X	X	-	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.

WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

MUELLER® DR1A SERIES DUCTILE IRON SERVICE SADDLES - SINGLE STRAP

Nylon Ductile Iron Service Saddles for use on cast iron, ductile iron, steel pipe

- Outlet tapped with either AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- Single strap design rated at 250 psig (1724 kPa) maximum working pressure
- ASTM A536 ductile iron body
- Body is Nylon 11 (10 -12 mil)
- Forged alloy steel strap
- Rolled strap threads
- Nitrile O-ring gasket
- 1/2" thru 2" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



DR 1 A Series

MUELLER® Service Saddles with Single Alloy Strap

Pipe O.D. Range*		Kind and Size of Pipe				Single Alloy Strap						
Inch	mm	A-C	Std. Steel	Cast Iron, Ductile Iron	Tap***	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)					
							1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
2.35-2.50	59.7-63.5	**	2"	2"*	CC or IP	DR1A0235	050	075	100	-	-	-
2.85-2.91	72.4-73.9		2-1/2"	2-1/2"*	CC or IP	DR1A0285	050	075	100	-	-	-
3.56-4.00	91.0-101.0		3-1/2"	3"	CC or IP	DR1A0356	050	075	100	-	-	-
4.47-5.32	113.5-135.1		4"	4"	CC or IP	DR1A0447	050	075	100	125	150	200
6.59-7.37	167.4-187.2		6"	6"	CC or IP	DR1A0659	050	075	100	125	150	200
8.54-9.79	216.9-248.7		8"	8"	CC or IP	DR1A0845	050	075	100	125	150	200
10.64-12.12	270.3-307.8		10"	10"	CC or IP	DR1A1064	050	075	100	-	-	-
12.62-14.38	320.5-365.3		12"	12"	CC or IP	DR1A1262	050	075	100	-	-	-

* Important – carefully check the range of the saddle with the O.D. of the pipe being used.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer, to make certain you select the proper clamp:

1) Determine the O.D. of the pipe at the point of saddle installation;

2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size					
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
E-5™	X	X	X	X	X	X
D-5™	-	X	X	X	X	X
TRU-CUT™	-	X	X	-	-	-
MEGA-CUT™	X	X	X	X	X	X
PL-2™	-	X	X	-	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.

WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

4.12



MUELLER® DR2A SERIES DUCTILE IRON SERVICE SADDLES - DOUBLE STRAP

Rev. 5-11 Shaded area indicates change.

Nylon Ductile Iron Service Saddles for use on cast iron, ductile iron, steel pipe

- Outlet tapped with AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- Double strap design rated at 500 psig (3447 kPa) maximum working pressure
- ASTM A536 ductile iron body
- Body is Nylon 11 (10 -12 mil)
- Forged alloy steel strap
- Rolled strap threads
- Nitrile O-ring gasket
- 1/2" thru 2" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



DR 2 A Series

MUELLER® Service Saddles with Double alloy strap Strap

Pipe O.D. Range*		Kind and Size of Pipe				Double Steel Alloy Strap						
Inch	mm	A-C	Std. Steel	Cast Iron, Ductile Iron	Tap*** Thread	Base Catalog Number	Size of Tapping (add to "Base" to complete catalog number)					
							1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
2.35-2.50	59.7-63.5	**	2"	2"*	CC or IP	DR2A0235	050	075	100	-	-	-
3.56-4.00	91.0-101.0		3-1/2"	3"	CC or IP	DR2A0356	050	075	100	-	-	-
4.47-5.32	113.5-135.1		4"	4"	CC or IP	DR2A0447	050	075	100	125	150	200
6.59-7.37	167.4-187.2		6"	6"	CC or IP	DR2A0659	050	075	100	125	150	200
8.54-9.79	216.9-248.7		8"	8"	CC or IP	DR2A0845	050	075	100	125	150	200
10.64-12.12	270.3-307.8		10"	10"	CC or IP	DR2A1064	050	075	100	125	150	200
12.62-14.38	320.5-365.3		12"	12"	CC or IP	DR2A1262	050	075	100	125	150	200
17.40-18.80	442.0-477.5		-	16"	CC or IP	DR2A1740	-	075	100	125	150	200
18.00-19.50	457.2-495.3		-	18"	CC or IP	DR2A1800	050	075	100	125	150	200
20.00-21.60	508.0-548.6		-	20"	CC or IP	DR2A2000	050	075	100	125	150	200
24.00-25.80	609.0-655.3	-	24"	CC or IP	DR2A2400	050	075	100	125	150	200	

* Important—carefully check the range of the saddle with the O.D. of the pipe being used.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer. To make certain you select the proper clamp:

- 1) Determine the O.D. of the pipe at the point of saddle installation;
- 2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size					
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
E-5™	X	X	X	X	X	X
D-5™	-	X	X	X	X	X
TRU-CUT™	-	X	X	-	-	-
MEGA-CUT™	X	X	X	X	X	X
PL-2™	-	X	X	-	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.

WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

MUELLER® DR2S SERIES DUCTILE IRON SERVICE SADDLES - DOUBLE STRAP

Shaded area indicates change. Rev. 5-11

Nylon Ductile Iron Service Saddles for use on cast iron, ductile iron, AWWA C900 PVC plastic, steel and A-C pipe.

- Outlet tapped with AWWA taper (C.C.) or AWWA I.P. thread (F.I.P.T.)
- Double strap design rated at 500 psig (3447 kPa) maximum working pressure
- ASTM A536 ductile iron body
- Body is Nylon 11 (10 -12 mil)
- 304L stainless steel strap
- Rolled strap threads
- Nitrile O-ring gasket
- 1/2" thru 2" tap sizes
- Meets all applicable parts of ANSI/AWWA C800
- NSF 61 Certified



DR 2 S Series

MUELLER® Service Saddles with Double stainless steel strap

Pipe O.D. Range*		Kind and Size of Pipe				Double Stainless Steel Straps						
Inch	mm	A-C	Std. Steel IPS PVC	Cast Iron, Ductile Iron PVC C900	Tap*** Thread	Base Catalog Number	Size of Tapping (add to "Base " to complete catalog number)					
							1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
2.35-2.50	59.7-63.5		2"	2"*	CC or IP	DR 2 S 0235	050	075	100	-	-	-
3.56-4.00	91.0-101.0		3-1/2"	3"	CC or IP	DR 2 S 0356	050	075	100	-	-	-
4.47-5.32	113.5-135.1		4"	4"	CC or IP	DR 2 S 0447	050	075	100	125	150	200
6.59-7.37	167.4-187.4		6"	6"	CC or IP	DR 2 S 0659	050	075	100	125	150	200
8.56-9.79	216.9-248.7		8"	8"	CC or IP	DR 2 S 0854	050	075	100	125	150	200
10.64-12.12	270.3-307.8	**	10"	10"	CC or IP	DR 2 S 1064	050	075	100	125	150	200
12.62-14.38	320.5-365.3		12"	12"	CC or IP	DR 2 S 1262	050	075	100	125	150	200
17.40-18.80	442.0-477.5		-	16"	CC or IP	DR 2 S 1740	-	075	100	125	150	200
18.00-19.50	457.2-495.3		-	18"	CC or IP	DR 2 W 1800	050	075	100	125	150	200
20.00-21.60	508.0-548.6		-	20"	CC or IP	DR 2 W 2000	050	075	100	125	150	200
24.00-25.80	609-655.3		-	24"	CC or IP	DR 2 W 2400	050	075	100	125	150	200

* Important – carefully check the range of the saddle with the O.D. of the pipe being used.

** The outside diameter of A-C pipe varies from manufacturer to manufacturer. To make certain you select the proper clamp:

- 1) Determine the O.D. of the pipe at the point of saddle installation;
- 2) From the pipe O.D. range column of the above chart, choose a saddle that has a pipe O.D. range that includes the determined pipe diameter.
- 3) Ductile Iron Double Stainless Strap Saddles can be specifically sized for IPS PVC or C900.

***CC=AWWA Taper; IP=AWWA IP thread (F.I.P.T)

These machines may be used with the service saddles illustrated on this page

Machine	Service Saddle Tap Size					
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
E-5™	X	X	X	X	X	X
D-5™	-	X	X	X	X	X
TRU-CUT™	-	X	X	-	-	-
MEGA-CUT™	X	X	X	X	X	X
PL-2™	-	X	X	-	-	-

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.



WARNING: Use on A-C pipe, which contains a known carcinogen, requires appropriate protective equipment and procedures be employed.

MUELLER® SS Series Stainless Steel Service Saddle for 4" through 12" cast iron, ductile iron, steel and PVC plastic pipe.

- Single stud, 3/4" and 1" tapping boss (CC or IP); or Double stud, 3/4", 1", 1-1/4", 1-1/2" and 2" tapping boss (CC or IP). Offered in both 5" and 7-1/2" lengths.
- Shell - 304L stainless steel.
- Nitrile Gasket
- 304 SS Finger Lugs, Studs, Nuts & Washers
- Pressure rating -150 psig (1034 kPa)
- NSF 61 Certified



Stainless Steel Service Saddle

Standard Lengths: 5" and 7-1/2"

Pipe O.D. range*		Nominal Pipe Size	Saddle Size Number
Inches	Millimeters		
4.50-4.80	114.3-122.0	4"	0450
6.63-6.90	168.4-175.3	6"	0663
8.63-9.05	219.2-229.9	8"	0863
10.75-11.10	273.1-282.0	10"	1075
12.75-13.20	323.9-335.3	12"	1275

* Important – carefully check the range of the saddle with the O.D. of the pipe being used.
 **Also fits PVC Plastic Pipe – ASTM D2241 SDR 17 and lower and ASTM D1785 schedule 80 and above.

How to determine a Mueller® SS Saddle Part Number

Select the appropriate numbers/letters from the charts to build the 13 digit part number.
Example: SS7D0663CC150 is a 7-1/2" long saddle for pipe 6.63" to 6.9" with double studs and 1-1/2" CC tap.

Material*	Length*	Number of Studs	Saddle Size Number	Thread Style	Tap Size
SS	5=5" (S or D)	S=Single	From chart above	CC	075=3/4" (S or D)
	7=7-1/2" (D only)	D=Double		IP	100=1" (S or D)
					125=1-1/4" (D only)**
					150=1-1/2" (D only)
					200=2" (D only)

*7-1/2" only available in "D" (double stud) style
 **1-1/4" in IP only

TO ORDER SPECIFY QUANTITY, OUTLET TAPPING SIZE AND CATALOG NUMBER.