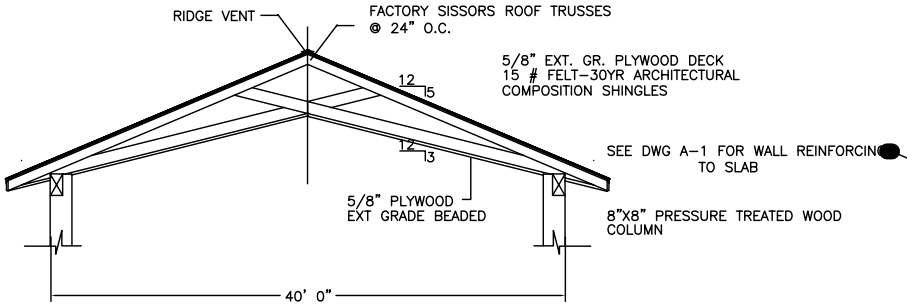

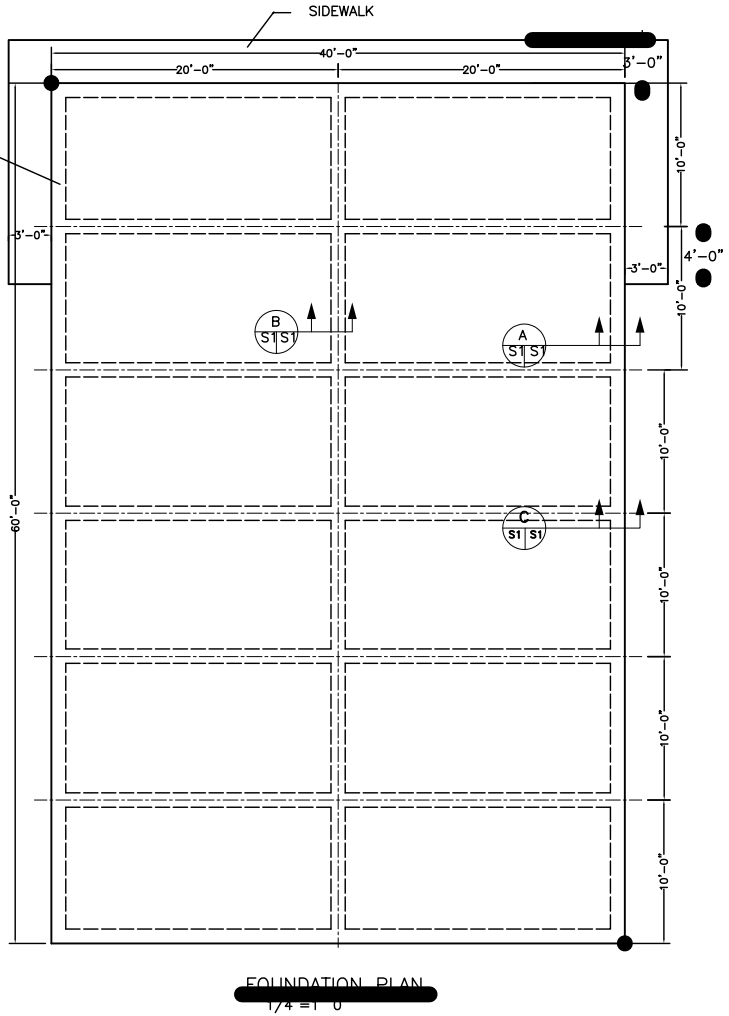

FOUNDATION PLAN
1/4 =1' 0

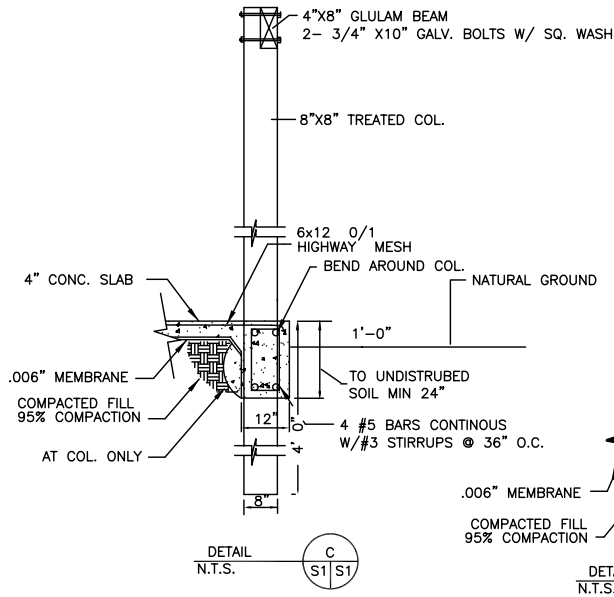

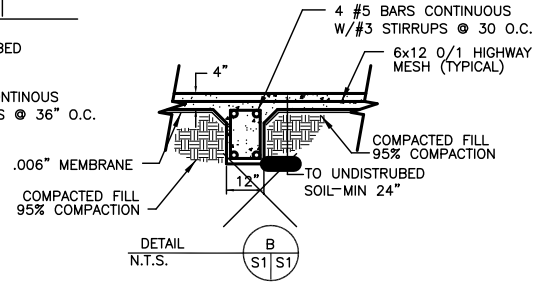

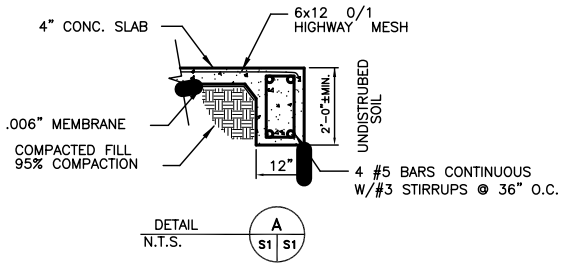

NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, DEPRESSIONS PRIOR TO COMMENCING WORK.
2. DIRT SHALL BE INSTALLED IN 6" LIFTS AND COMPACTED TO 95% MAXIMUM DENSITY.
3. TREAT SOIL BELOW SLAB FOR TERMITES.
4. CONCRETE MIX SHALL BE 3000 PSI. MINIMUM.

PAVILLION FOUNDATION PLAN

K BAR B RANCH
31294 HWY. 190
LACOMBE, LA 70445

K BAR B RANCH

DAMMON ENGINEERING, INC.
1005 FLORIDA AVENUE 985-649-5888 SLIDELL, LA. 70458
DAMMONENGINEERING.COM

1/4"=1'-0"
FILE:
JOB NO.
DATE:5/1/06
SHEET
S-1
OF