

### Ordering Information

Applicable product:		
Left outlet	K-1585-AB	shown
Right outlet	K-1586-AB	not shown
Accessories/hardware:		
Drain	K-7160-TF	recommended
Focal bath door or	K-701025	recommended
Focal bath door or	K-701026	
Forum™ bath door or	K-703012	
Helios™ bath door or	K-704010	
Helios™ bath screen	K-704012	

### Product Information



Fixture*:	basin area	top area	weight
Bathing well	1168 x 508mm	1397 x 584mm	58 Kg.
	water depth	capacity	
To overflow	273mm	163 litres	
Configuration			1-piece
Drain Outlet			Ø57mm
* Approximate measurements for comparison only.			

### Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Fixture not drilled for supply fittings.

Shimming may be required to level fixture.

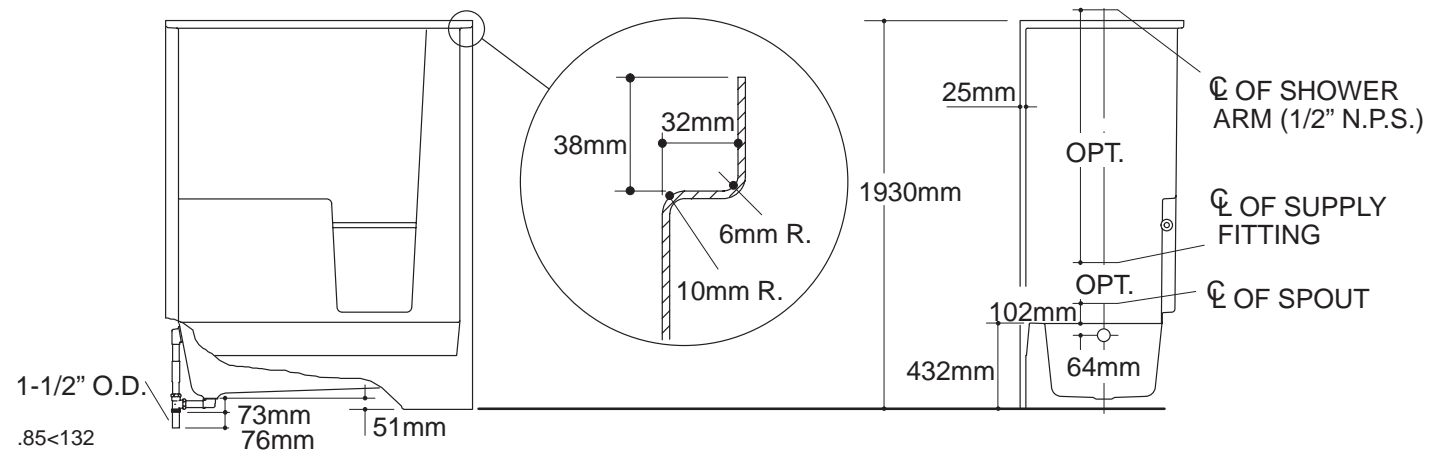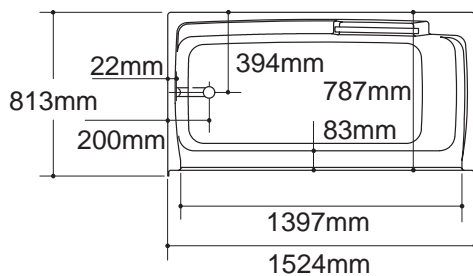

### Roughing-In Notes

Fixture conforms to ANSI Standard Z124.2. All dimensions are nominal.

No change in measurements if connected with drain illustrated.

Stud opening tolerance (+ 6mm – 0mm). When fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between stud frame and fixture may be required.