


FEATURES

- 63" x 24-3/4" x 82-1/2"
- Fireclay
- Avonite® countertop
- Integral pedestal lavatory in White
- Single-hole drilling
- Includes polished chrome overflow trim
- Includes lighted mirror and storage cabinets with white- or bird's-eye maple veneer doors

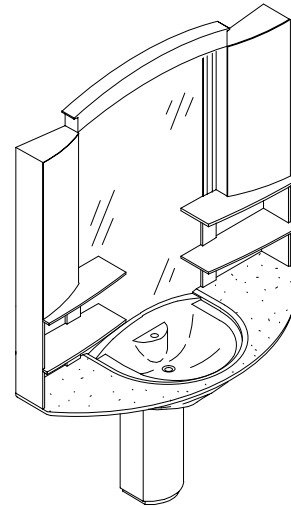

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- IAPMO/UPC
- Underwriters Laboratories (UL)

COLORS/FINISHES

- 0 White
- BY Bird's-Eye Maple

Accessories:

- CP Polished Chrome

SPECIFIED MODEL:

Model	Description	Colors/Finishes	
K-3012	Single basin vanity	<input type="checkbox"/> 0 White	<input type="checkbox"/> BY
Recommended Accessories			
K-15000	Trocadero sheetflow lavatory faucet	<input type="checkbox"/> CP	

PRODUCT SPECIFICATION:

The single basin vanity shall be 63" in length, 24-3/4" in width, and 82-1/2" in height. Vanity integral pedestal lavatory shall be made of fireclay, and countertop shall be made of Avonite®. Vanity pedestal lavatory shall have single-hole drilling. Vanity pedestal lavatory shall include polished chrome overflow trim. Vanity shall include lighted mirror and storage cabinets. Vanity shall be Kohler Model K-3012-_____.

TROCADERO™

REQUIRED ELECTRICAL SERVICE

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Remote box	120 V., 15 A, 60 Hz
------------	---------------------


REMOTE BOX TO UNIT

Two 25' lengths of nonmetallic sheathed cable 14-3 with ground. Use wire rated at 75° C min.

PRODUCT INFORMATION

Fixture*:		basin area	water depth
Lavatory		22" x 15"	6"
Outlet	1-3/4" D.		
Faucet hole	1-3/8" D.		

* Approximate measurements for comparison only.

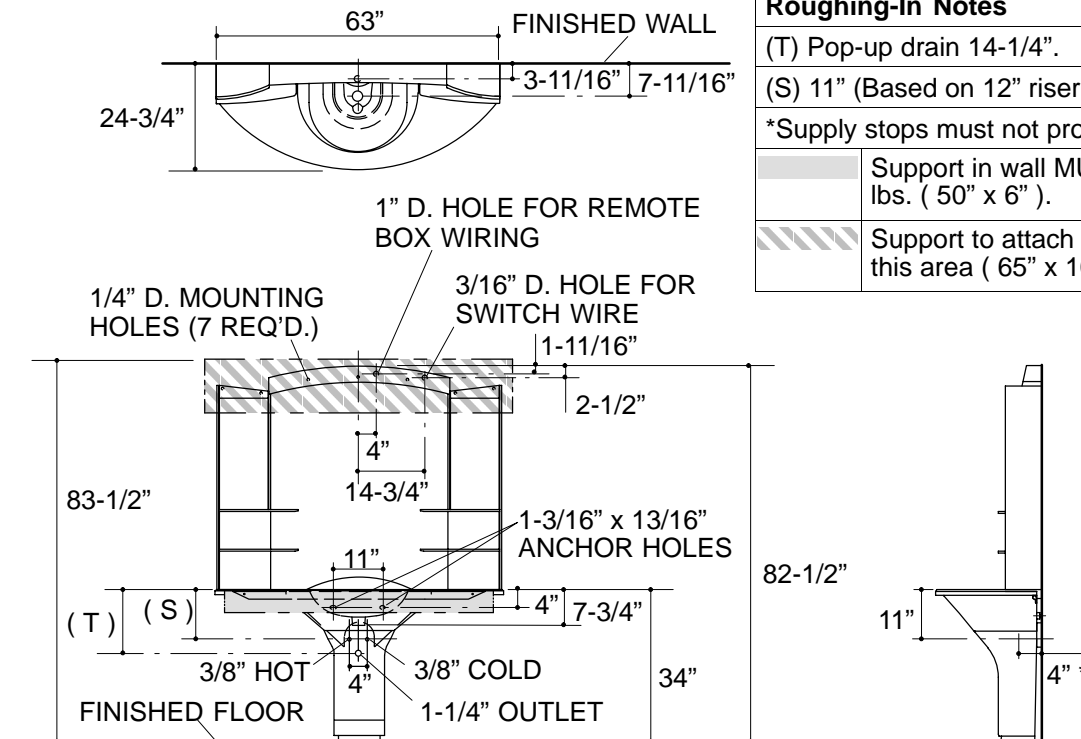

Roughing-In Notes

(T) Pop-up drain 14-1/4".

(S) 11" (Based on 12" riser which may require cutting).

*Supply stops must not protrude from wall more than 4".

Support in wall MUST be able to support 320 lbs. (50" x 6").

Support to attach upper cabinets and mirror in this area (65" x 10").

.75<132

PRODUCT DIAGRAM