

## Ordering Information

Applicable product:		
With neck jets	K-1370-N	shown
Without neck jets	K-1370-H1	not shown
Accessories/hardware:		
Jet trim kit	K-9698	required
Drain	K-7167	recommended
Apron	K-1373	optional
Vinyl tiling-in bead*	K-1181	optional
*Use K-1181 vinyl bead when wall material contacts any top surface of bath.		

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V., 20 A, 60 Hz

## Product Information

Fixture*:	basin area	top area	weight
Bathing well	44" x 25"	54" x 29"	165 lbs.
	water depth	capacity	
To overflow	17"	100 gals.	

\* Approximate measurements for comparison only.

Pump:	HP	V	Hz	A
1-speed	2	120	60	18.5


Included Components:	
Cutout template	106490-7

## Installation Notes



Refer to installation instructions included with fixture before beginning installation.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 24" of the pump.

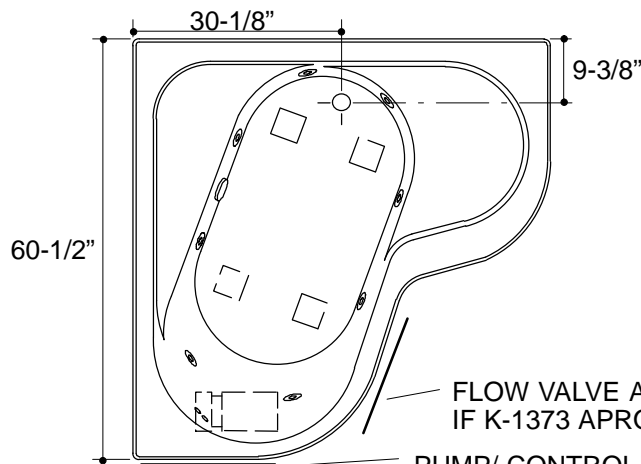

PUMP/ CONTROL ACCESS, IF K-1373 APRON IS NOT USED.

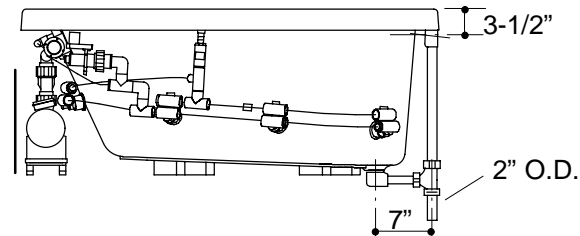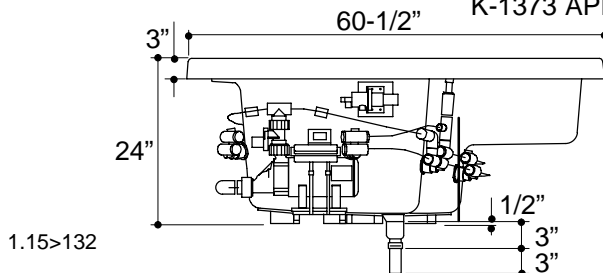

## Roughing-In Notes

Fixture conforms to ANSI Standard Z124.1. All dimensions are nominal.

No change in measurements if connected with drain illustrated.

Minimum access:

Pump/control	25" W x 15" H panel	see illustration
Flow valve	20" W x 15" H panel	see illustration