

**BATH AND SHOWER FAUCET TRIM  
K-T16115**

**ALSO K-T16116, K-T16139, K-305**




**FEATURES**

- Brass construction
- Available with scroll or traditional handle
- Push button diverter

**CODES/STANDARDS APPLICABLE**

Specified model meets or exceeds the following:



- ASME/ANSI A112.18.1M
- ASSE/ANSI 1016
- CSA B125 (K-T16115, K-T6116)
- IAPMO/UPC (K-T16115, K-T6116)



**COLORS/FINISHES**

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes



**SPECIFIED MODEL:** For complete faucet, both faucet trim and Rite-Temp valve must be specified.

Model	Description	 <input type="checkbox"/> ADA		 <input type="checkbox"/> ADA		
		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T16115-4	Bath and Shower Trim, Scroll Handle	<input type="checkbox"/> CP	<input type="checkbox"/> PB			
K-T16115-4A	Bath and Shower Trim, Traditional Handle			<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T16116-4	Shower Only Trim, Scroll Handle	<input type="checkbox"/> CP	<input type="checkbox"/> PB			
K-T16116-4A	Shower Only Trim, Traditional Handle			<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T16139-4	Valve Only Trim, Scroll Handle	<input type="checkbox"/> CP	<input type="checkbox"/> PB			
K-T16139-4A	Valve Only Trim, Traditional Handle			<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

**Required Accessory on Page 2.**

**PRODUCT SPECIFICATION:**

Rite-Temp pressure-balancing single-control bath and shower faucet trim shall be of brass construction. Bath and shower trim shall include showerhead with arm and flange, 5-3/4" non-diverter spout with N.P.T. connection, and faceplate with handle and push-button diverter. Shower only trim shall include showerhead with arm and flange, and faceplate with handle and push-button diverter. Valve only trim shall include faceplate with handle and push-button diverter. Faucet trim shall be K-T\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ and Rite-Temp valve shall be K-305-\_\_\_\_\_ -NA.


Required Accessory			
K-305-K	Rite-Temp Valve Without Stops	<input type="checkbox"/> NA	
K-305-KS	Rite-Temp Valve With Stops		<input type="checkbox"/> NA

## INSTALLATION NOTES

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7 to 18" with single elbow between valve and wall-mount spout.

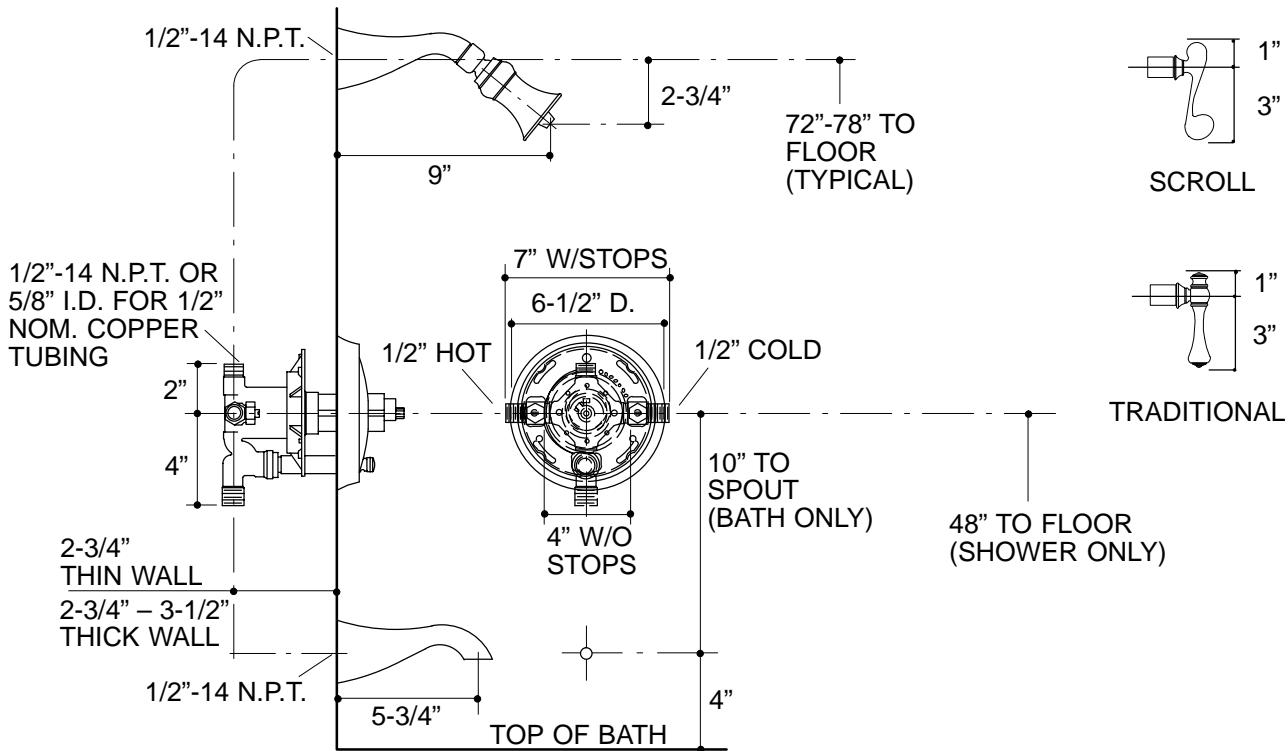

## PRODUCT DIAGRAM