

Ordering Information

Applicable product:		
Left outlet	K-1533-AF	shown
Right outlet	K-1532-AF	not shown
Drain	K-7160-AF	recommended
Focal shower door or Focal shower door or Forum™ shower door	K-701000 or K-701026 or K-703012	recommended

Product Information



Fixture*:	basin area	top area	weight
Bathing well	1219 x 559mm	1422 x 610mm	43 Kg.
	water depth	capacity	
To overflow	229mm	132 litres	
Configuration			1-piece
* Approximate measurements for comparison only.			

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Fixture not drilled for supply fittings.

Shimming may be required to level fixture.

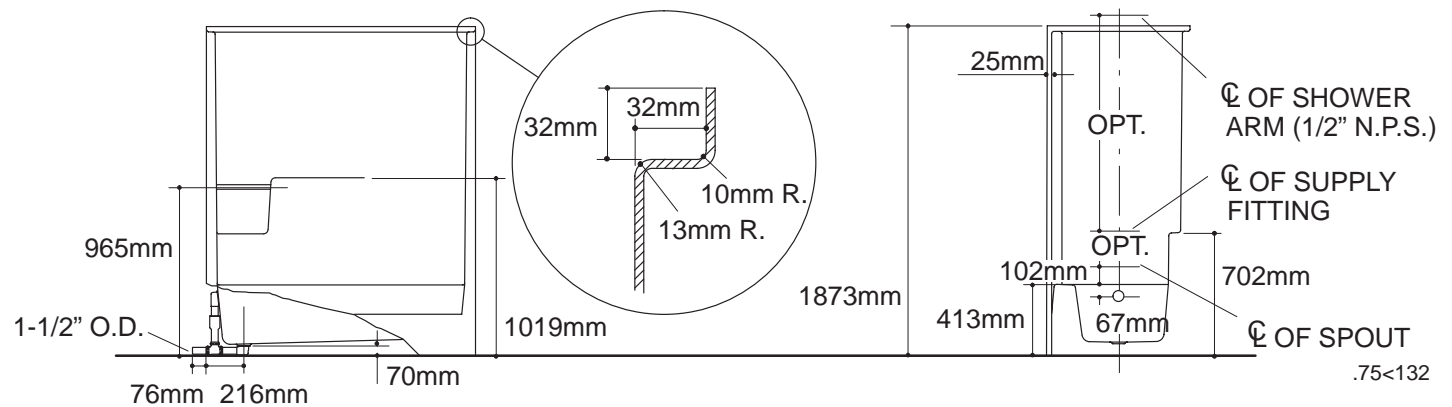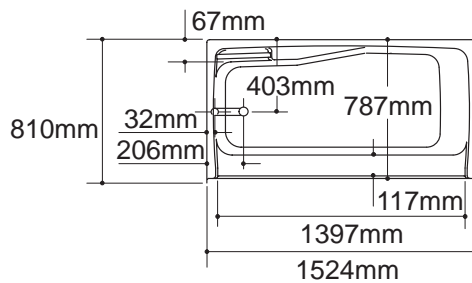

Roughing-In Notes

Fixture conform to ANSI Standard Z124.2. All dimensions are nominal.

No change in measurements if connected with drain illustrated.

Stud opening tolerance (+ 6mm – 0mm). When fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between stud frame and fixture may be required.