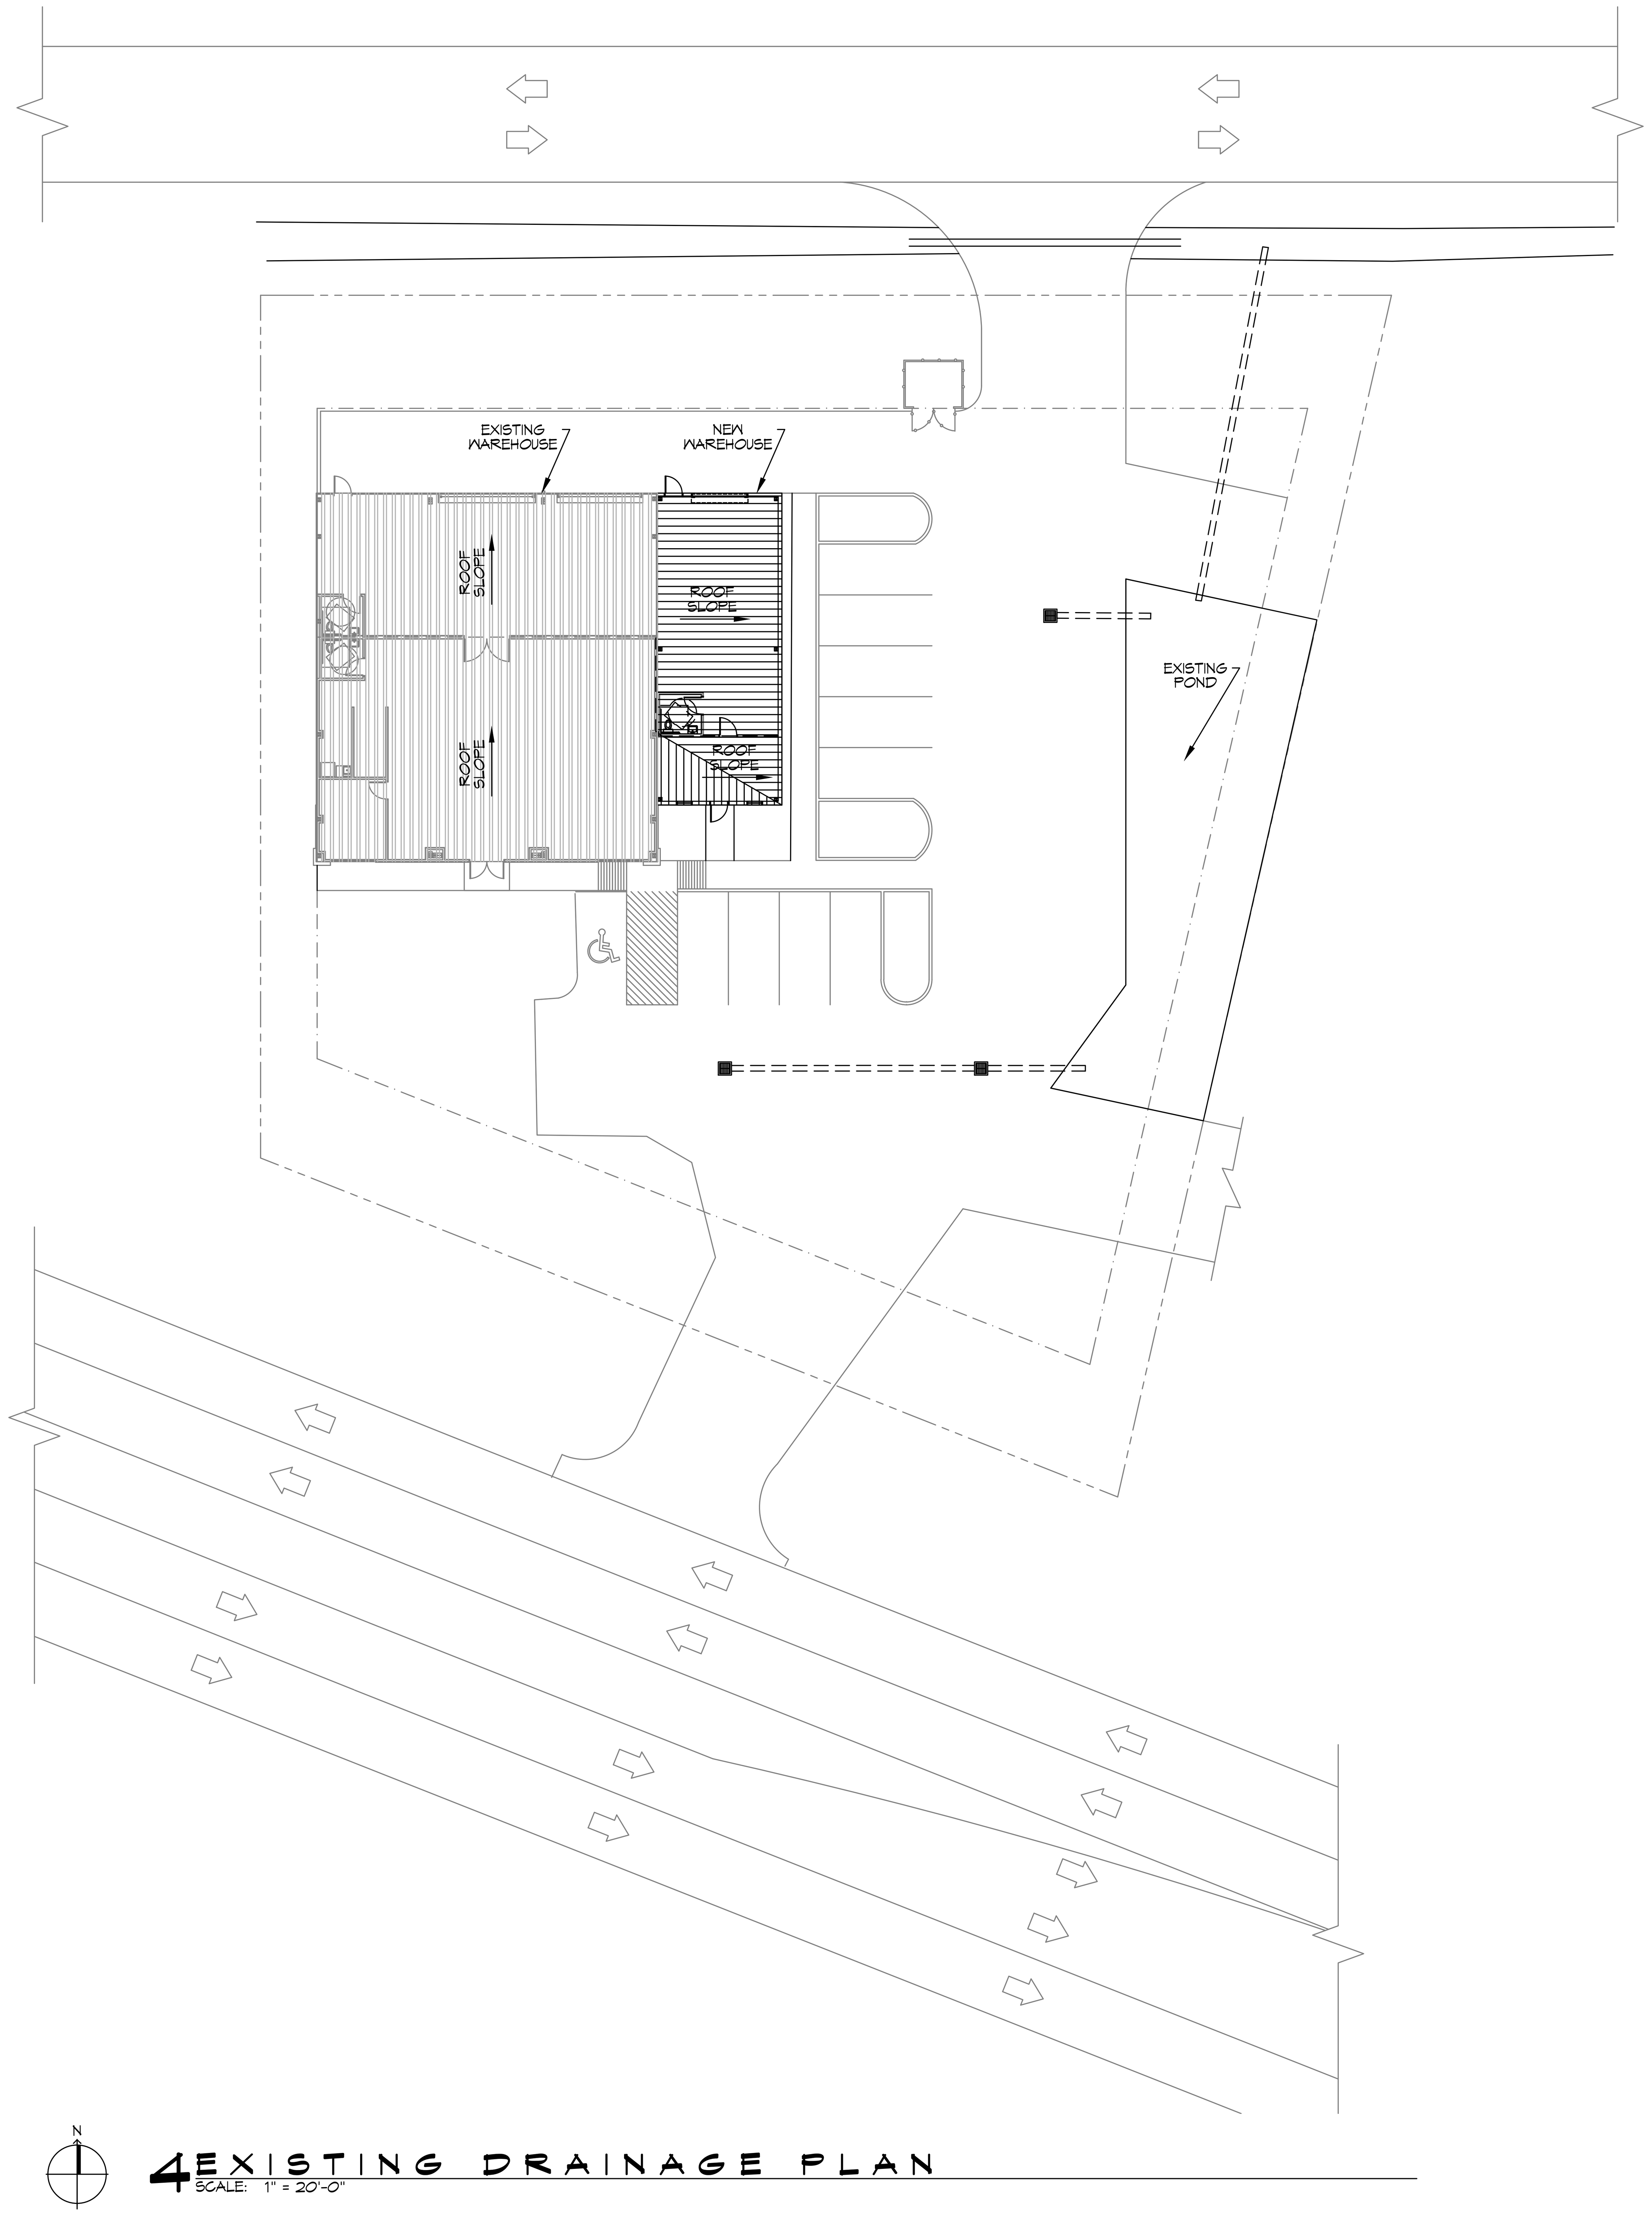

4 EXISTING DRAINAGE PLAN
SCALE: 1" = 20'-0"

NOTE TO ENGINEERING:
THESE CALCULATIONS
INCLUDED FOR BOTH BLDG'S
AT TIME OF DESIGN.

PROJECT: RAY HORVATH BUILDING

STORMWATER RUN-OFF CALCULATIONS

Formulas used:

[1] RATIONAL METHOD: Q=Aci

where:
- Q= Peak discharge of watershed in cubic feet per second (cfs) due to maximum storm assumed.
- A= Area of watershed in acres.
- c= Coefficient of run-off [2].
- i= Intensity of rainfall in inches per hour based on concentration time. [3]

[4] TC=

where:
- TC=Time of concentration= time required for rain falling at most remote point to reach discharge point.
- c= Site run-off coefficient based on conditions shown.
- s= Percent slope of overland flow.

PRIOR DEVELOPMENT
25 Year Frequency

Q_1 = Aci

Watertight Surfaces		838	sqft =	0.019 Acres
c(1) =	0.9			
Gravel Surface		3554	sqft =	0.082 Acres
c(2) =	0.25			
Green Space		28428	sqft =	0.653 Acres
c(3) =	0.15			
Summary		32820	sqft =	0.753 Acres
c =	0.18			

Duration (D) = Time of concentration (TC)
where L = 218 run-off length ft; Elev diff 1.4
c = 0.18 run-off coef
S = 0.6422 percent slope
therefore TC = D = 21.80 minutes
Expected rainfall intensity i = 3.64 in/hr

Q_1 = 0.494 cfs 10% reduction **0.049 cfs**

POST DEVELOPMENT
25 Year Frequency

Q_2 = Aci

Watertight Surfaces		18018	sqft =	0.414 Acres
c(1) =	0.9			
Gravel Surface		0	sqft =	0.000 Acres
c(2) =	0.25			
Green Space		14712	sqft =	0.338 Acres
c(3) =	0.15			
Summary		32730	sqft =	0.751 Acres
c =	0.56			

Duration (D) = Time of concentration (TC)
where L = 205 run-off length ft; Elev diff 3.1
c = 0.56 run-off coef
S = 1.5122 percent slope
therefore TC = D = 14.30 minutes
Expected rainfall intensity i = 3.64 in/hr

Q_2 = 1.539 cfs

DETENTION REQUIREMENTS

Detention required Q_2-Q_1 1.05 cfs
ONE HOUR DETENTION 3765.2 cuft
DETENTION DIMENSIONS: WIDTH 16.5 feet; LENGTH 191 feet; DEPTH **2.0 feet**

DISCHARGE END AREA REQUIREMENTS

where:
- A= Discharge Area required
- g= Acceleration of gravity
- c= Discharge coefficient
- h= Hydraulic head
- Q= Flow volume from run-off

Pipe Servicing Site Drainage
Q = 0.049 cfs; h = 3.00 feet
c = 0.62 coefficient; A = 0.006 sqft
g = 32.16 ft/sec/sec

REQUIRED CONDUIT = 1.03 inch inside diameter

5 EXISTING CALCULATIONS
SCALE: N.T.S.

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832

REVISIONS
#	DESCRIPTION	DATE

SEAL:

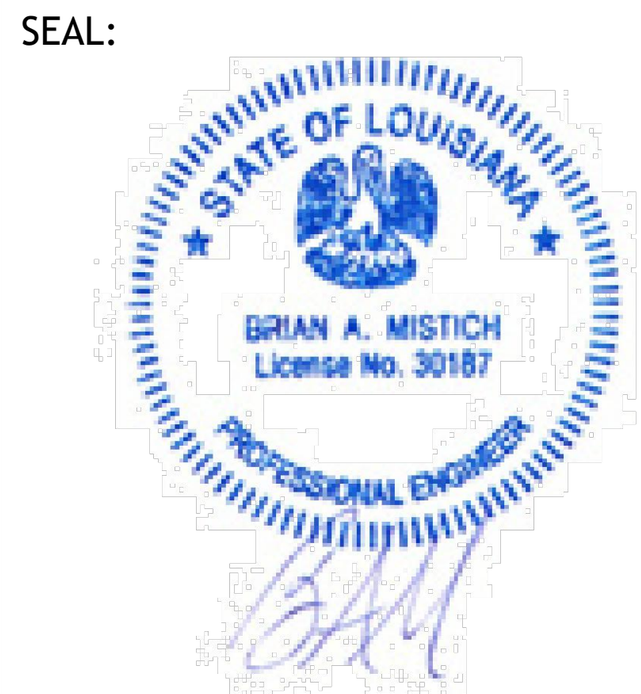

ADDITION TO OFFICE/WAREHOUSE
RAY HORVATH
FLOORWORKS AND BLINDS
1860 SHORTCUT HWY
SLIDELL, LA 70458

JOB No:	2026	DATE:	11-18-2025
DRAWN BY:	CKD	CHECKED BY:	JMS

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

SHEET TITLE:
EXISTING DRAINAGE PLAN

DRAWING NUMBER:
C103