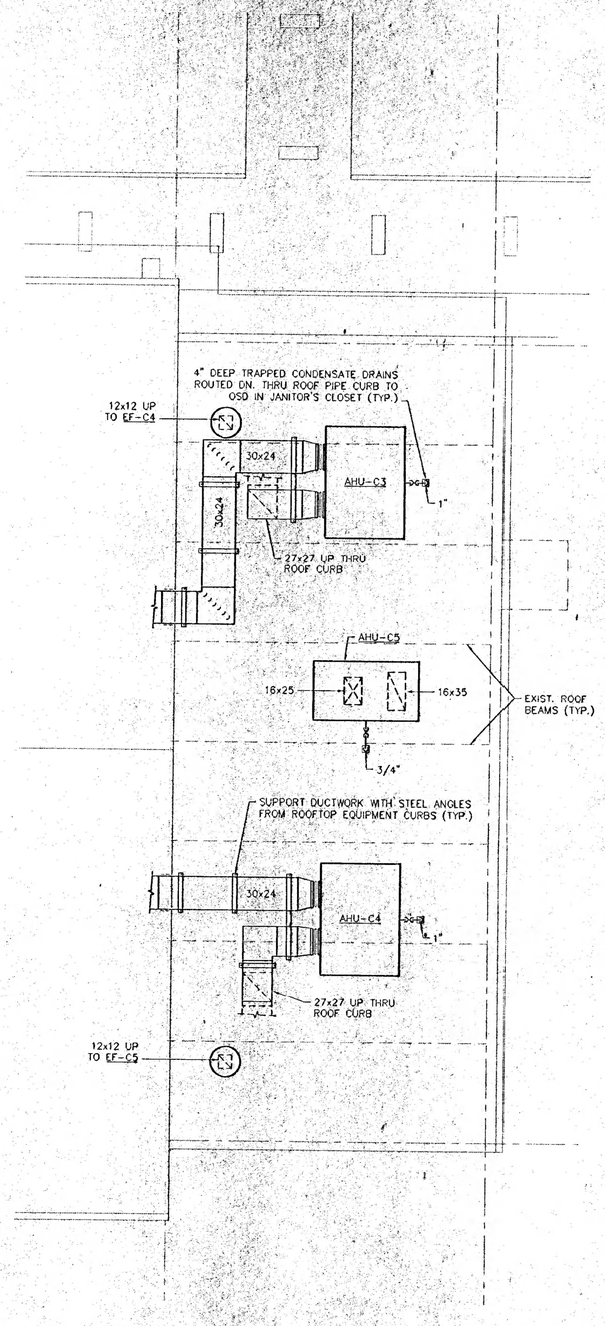

NOTES:

1. GYMNASIUM SUPPLY AND RETURN DUCTWORK AS WELL AS PLATFORM AHU-6 RETURN DUCT IS SHEETMETAL WITH 2" LINING WITH CLASS A SEALED SEAMS AND JOINTS. SIZES SHOWN ARE SHEETMETAL SIZES.
2. PLATFORM AHU-6 RIGID SUPPLY DUCT IS SHEETMETAL WITH 2" THICK WRAP INSULATION WITH VAPOR BARRIER. RIGID DUCT DIMENSIONS ARE SHEETMETAL SIZES.
3. EXTERIOR DUCTWORK SHALL RECIEVE 2 COATS OF GREY EPOXY PAINT WITH CLASS A SEAMS AND JOINTS. SUPPORTED FROM ROOF CURB EQUIPMENT SUPPORTS WITH STEEL ANGLE SUPPORTS TO BE PAINTED SAME AS DUCTWORK. EQUIPMENT SUPPORTS AND PIPE CURBS SHALL BE ALUMINUM, EQUAL TO CREATIVE METALS, INC. COORDINATE ALL CURB HEIGHT DIMENSIONS AND SLOPE OF ROOF.
4. ALL THERMOSTATS SHALL BE MOUNTED IN HEAVY DUTY VENTED METAL LOCKING COVER BOXES.
5. ALL AHU DUCTWORK AND OTHER EQUIPMENT SHALL BE MOUNTED LEVEL ON CURBS TO MATCH PITCH OF ROOF.
6. FLEXIBLE ROOFTOP DUCTWORK CONNECTIONS AT SIDE FLOW AHU'S SHALL BE INSULATED WITH 3/4" THICK ARMORFLEX INSULATION WITH ALUMINUM JACKETING. SIDES OF INSULATION SHALL RECIEVE 2 COATS OF BITUMINUS GREY PAINT.

N

1 / A2.6 ROOF PLAN - PARTIAL AREA C-2 - HVAC

SCALE: 3/16" = 1'-0"

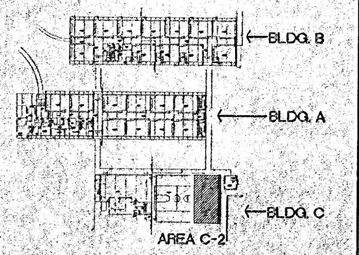

KEY PLAN

HANDLIN & MARTIN
CONSULTING ENGINEERS, INC.
3021 35th St. Suite D (504) 833-6189
Metairie, LA. 70001 FAX (504) 831-6801

FAUNTLEROY & LATHAM, INC.
ARCHITECTS, ENGINEERS, PLANNERS
229 ST. JOHN LANE • COVINGTON, LA. 70433 • (985) 893-4100 • www.fl-inc.com

"DRAWINGS ARE THE SOLE PROPERTY OF FAUNTLEROY & LATHAM, INC. AND ARE ISSUED AS INSTRUMENTS OF SERVICE. THESE DRAWINGS SHALL NOT BE COPIED, REPRODUCED OR USED IN ANY MANNER WITHOUT WRITTEN CONSENT OF FAUNTLEROY & LATHAM, INC."

STATE OF LOUISIANA
JOSEPH K. HANDLIN II
REG. NO. 18904
REGISTERED PROFESSIONAL ENGINEER IN MECHANICAL ENGINEERING

RENOVATION TO
COVINGTON ELEMENTARY SCHOOL
325 S. JACKSON
COVINGTON, LOUISIANA

ROOF PLAN - PARTIAL AREA C-2 HVAC

202032

Dwn.	Chk.
GMF	JKH
Date	Rev.
17.SEPT.02	

M3.7
Sheet # of

F:\WORK\PROJECTS\2002\202032\Revit\202032-HVAC.rvt 9/17/2002 08:21:00 AM