


TOTAL HEAD

M PSI FT

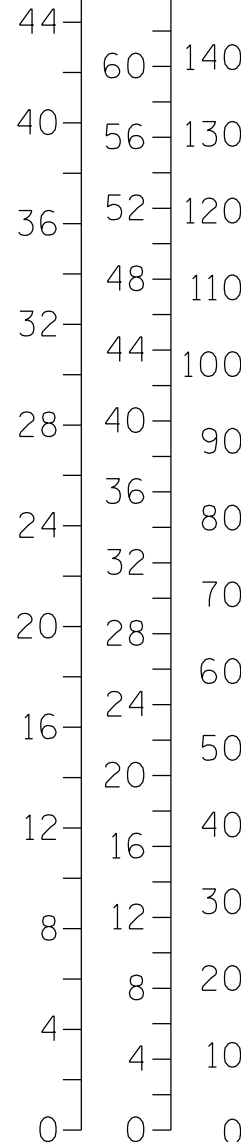

REPRIMING LIFTS



RPM	650	750	850	950	1050	1150	1250	- 1950
FEET	5	8	16	19	22	24	25	
METERS	1,5	2,4	4,9	5,8	6,7	7,3	7,6	

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 10525D 10525B CURVE T4A-B-4
IMPELLER 10528 MODEL T4A-B
SIZE 4"X4" IMP.DIA. 9.75"
SP.GR. 1.0 RPM NOTED


Select performance within operating range of curve.

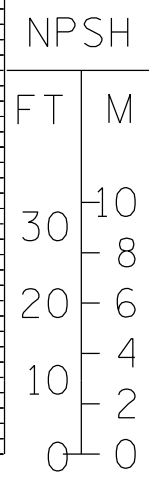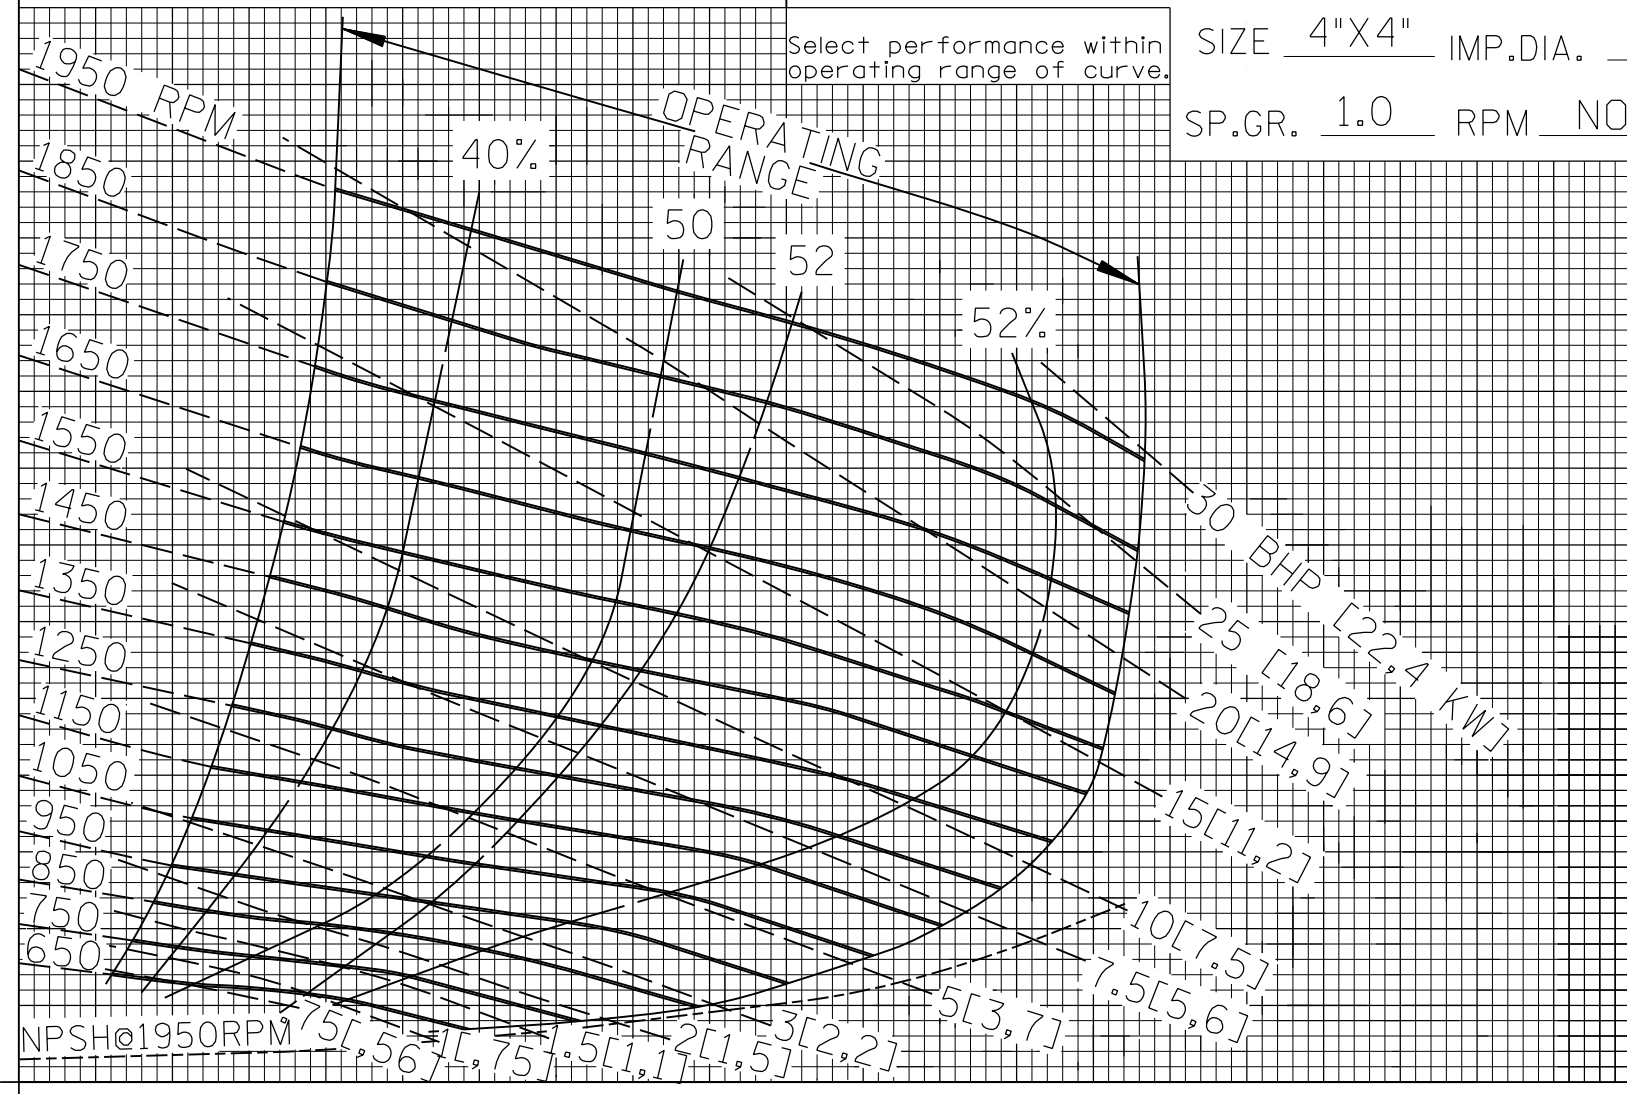

U.S. GALLONS PER MINUTE X 10

LITRES PER SECOND

CUBIC METRES PER HOUR X 10

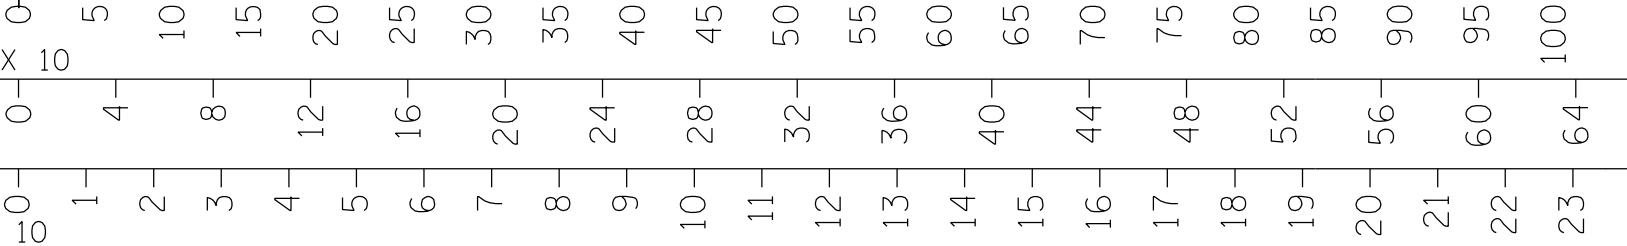

FILE NO. t4ab.s04