$$plot date and plot time$$

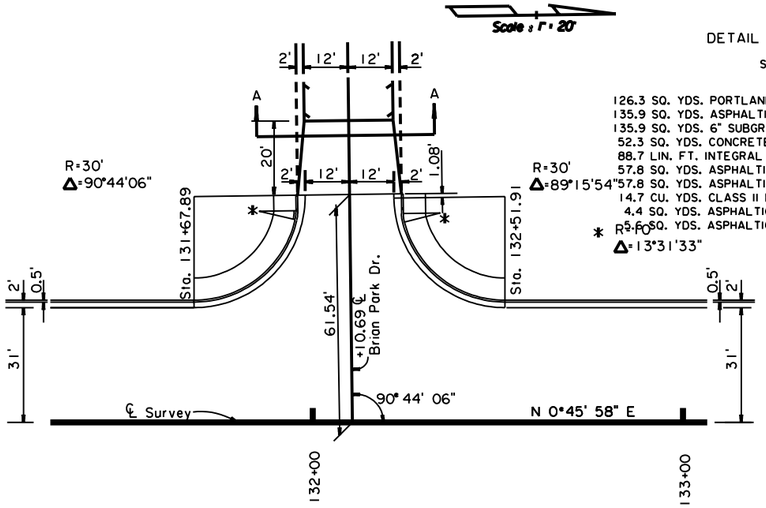

TURNOUT AT STA.132+10.69

DETAIL OF TURNOUT LT.

STA. 132+10.69
QUANTITIES:

126.3 SQ. YDS. PORTLAND CEMENT CONCRETE PAVEMENT (12" THICK)
135.9 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5A)
135.9 SQ. YDS. 6" SUBGRADE LAYER
52.3 SQ. YDS. CONCRETE WALK (4" THICK)
88.7 LIN. FT. INTEGRAL CONCRETE CURB (BARRIER TYPE)
57.8 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 8)
57.8 SQ. YDS. ASPHALTIC CONCRETE BINDER COURSE (TYPE8)
14.7 CU. YDS. CLASS II BASE COURSE
4.4 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 9)
5.6 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5B)

* R=60'
Δ=13°31'33"

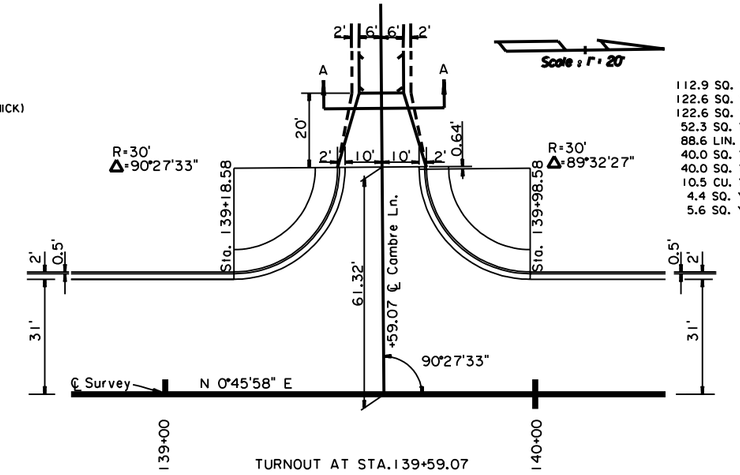

TURNOUT AT STA.139+59.07

DETAIL OF TURNOUT LT.

STA. 139+59.07
QUANTITIES:

112.9 SQ. YDS. PORTLAND CEMENT CONCRETE PAVEMENT (12" THICK)
122.6 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5A)
122.6 SQ. YDS. 6" SUBGRADE LAYER
52.3 SQ. YDS. CONCRETE WALK (4" THICK)
88.6 LIN. FT. INTEGRAL CONCRETE CURB
40.0 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 8)
40.0 SQ. YDS. ASPHALTIC CONCRETE BINDER COURSE (TYPE 8)
10.5 CU. YDS. CLASS II BASE COURSE
4.4 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 9)
5.6 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5B)

NOTE: FOR TYPICAL SECTION OF
SECTION A-A SEE SHEET NO. 2a

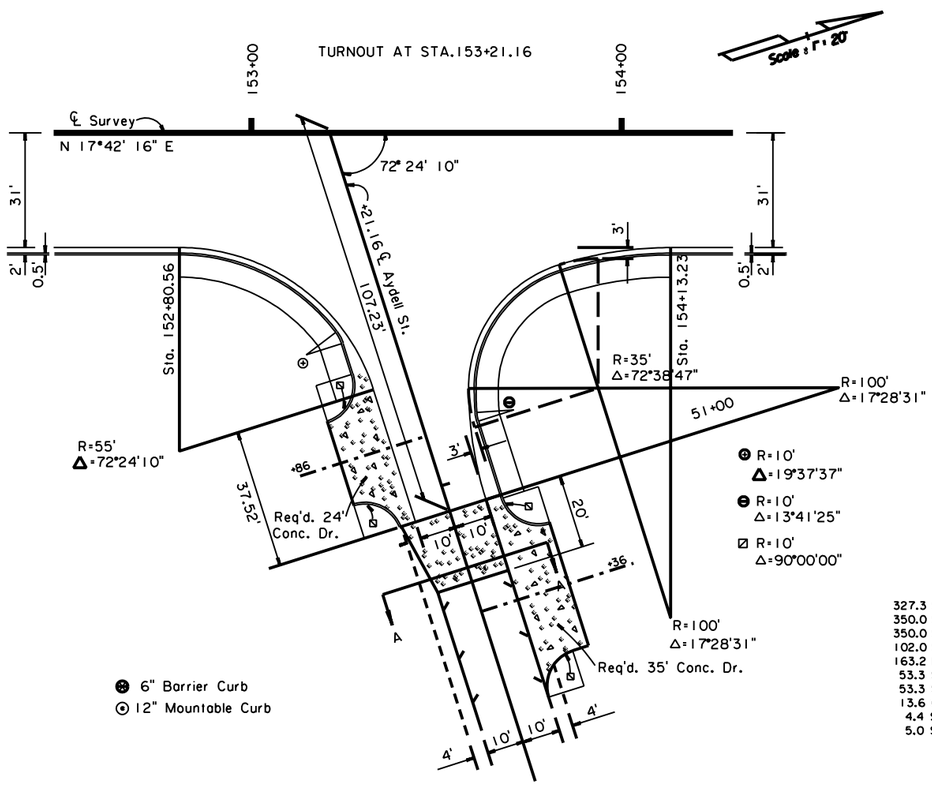

TURNOUT AT STA.153+21.16

DETAIL OF TURNOUT RT.

STA. 153+21.16
QUANTITIES:

327.3 SQ. YDS. PORTLAND CEMENT CONCRETE PAVEMENT (12" THICK)
350.0 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5A)
350.0 SQ. YDS. 6" SUBGRADE LAYER
102.0 SQ. YDS. CONCRETE WALK (4" THICK)
163.2 LIN. FT. INTEGRAL CONCRETE CURB (BARRIER TYPE)
53.3 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 8)
53.3 SQ. YDS. ASPHALTIC CONCRETE BINDER COURSE (TYPE 8)
13.6 CU. YDS. CLASS II BASE COURSE
4.4 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 9)
5.0 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5B)

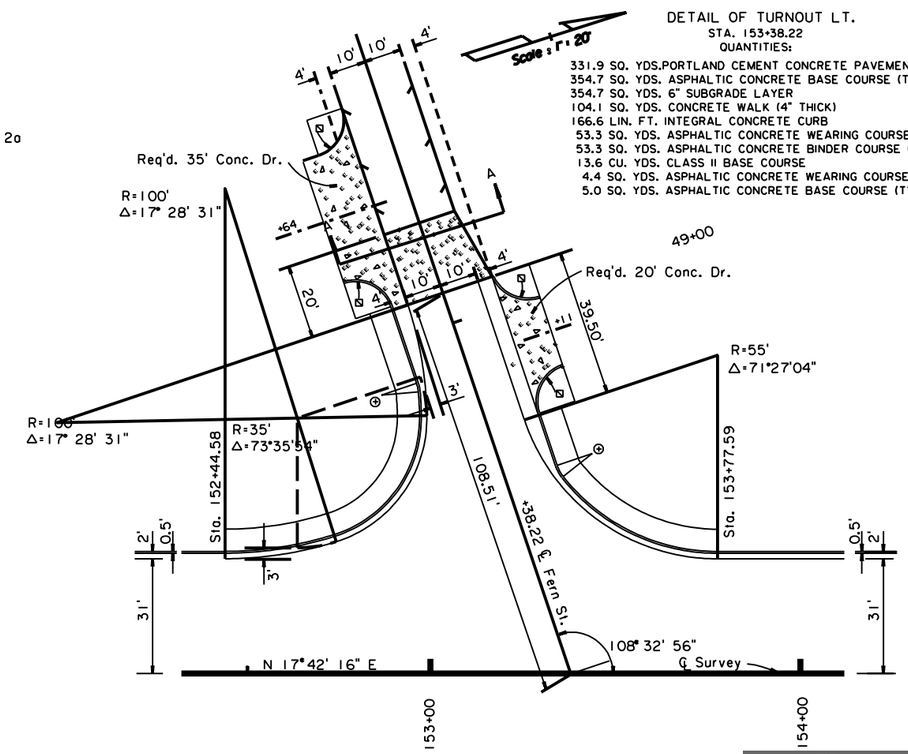

TURNOUT AT STA. 153+38.22

DETAIL OF TURNOUT LT.

STA. 153+38.22
QUANTITIES:

331.9 SQ. YDS.PORTLAND CEMENT CONCRETE PAVEMENT (12" THICK)
354.7 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5A)
354.7 SQ. YDS. 6" SUBGRADE LAYER
104.1 SQ. YDS. CONCRETE WALK (4" THICK)
166.6 LIN. FT. INTEGRAL CONCRETE CURB
53.3 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 8)
53.3 SQ. YDS. ASPHALTIC CONCRETE BINDER COURSE (TYPE 8)
13.6 CU. YDS. CLASS II BASE COURSE
4.4 SQ. YDS. ASPHALTIC CONCRETE WEARING COURSE (TYPE 9)
5.0 SQ. YDS. ASPHALTIC CONCRETE BASE COURSE (TYPE 5B)

STATE OF LOUISIANA
HAROON R ABOOH
REG. No. 28364
REGISTERED PROFESSIONAL ENGINEER IN CIVIL ENGINEERING

Haroon Abooh
10/17/97

FIGURE 8-47: GEOMETRIC DETAILS

$$this is the pathname including directory path and design file name$$

SHEET NUMBER	62
PARISH	LIVINGSTON
FEDERAL PROJECT	STP-423-1(003)
STATE PROJECT	268-01-0012
DESIGNED	S. PERAULT
CHECKED	H. ABOOH
DETAILED	S. PERAULT
CHECKED	H. ABOOH
DATE	March, 1993
SHEET	GEOMETRIC DETAILS

NO.	DATE	REVISION DESCRIPTION	BY

GEOMETRIC DETAILS

ROAD DESIGN