

1 POWER PLAN
 E2.1.0 SCALE: 1/8"=1'-0"

GENERAL SHEET NOTES

- ALL 120 VOLT BRANCH CIRCUITS IN EXCESS OF 75' SHALL HAVE CONDUCTOR SIZE INCREASED A MINIMUM OF 1" CONDUCTOR SIZE. INSTALLING CONTRACTOR SHALL DETERMINE ACTUAL CONDUCTOR SIZE TO BE INSTALLED TO ADHERE TO VOLTAGE DROP REQUIREMENTS.
 - ALL BRANCH CIRCUIT WIRING SHALL BE #12 AWG UNB AND IN CONDUIT/ENT. EACH BRANCH CIRCUIT SHALL HAVE A SEPARATE NEUTRAL CONDUCTOR.
 - STOREFRONT RECEPTACLE COVERAGE COLOR SHALL MATCH ADJACENT COLOR.
 - LOCATION OF CEILING AND FLOOR MOUNTED OUTLETS TO BE COORDINATED WITH ARCHITECTURAL POWER PLANS AND FIXTURE CONTRACTOR. COORDINATE EXACT REQUIREMENTS.
- SHEET KEYNOTES**
- PROVIDE JUNCTION BOX, SWITCH, AND WHIP FOR STORE SIGN. ADDITIONAL J-BOXES, CONDUIT AND WIRING MAY BE REQUIRED FOR A COMPLETE INSTALLATION OF SIGN. COORDINATE THE EXACT REQUIREMENTS AND LOCATION WITH SIGN VENDOR. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATION.
 - PROVIDE RECEPTACLE FOR STORE SIGN. ADDITIONAL J-BOXES, CONDUIT AND WIRING MAY BE REQUIRED FOR A COMPLETE INSTALLATION OF SIGN. COORDINATE THE EXACT REQUIREMENTS AND LOCATION WITH SIGN VENDOR. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATION.
 - PROVIDE 7" x 8" x 3/4" PLYWOOD BACKBOARD FOR TELEPHONE/DATA EQUIPMENT, A.V. RACK, CCTV SYSTEM AND SOUND SYSTEM. EXTEND LANDLORD PROVIDED (1) 2" CONDUIT WITH PULL WIRE TO TELEPHONE BOARD LOCATION IN STOCK ROOM. PROVIDE (2) JUNCTION BOXES @ 84" AFF. FOR TERMINATION OF SOUND SYSTEM AND CCTV WIRING. PROVIDE (4) QUAD RECEPTACLES (1-@ +36" AFF FOR TELEPHONE/DATA SERVICE, 1-@ +84" AFF FOR SOUND SYSTEM, 1-@ +84" AFF FOR CCTV SYSTEM, 1-@-36" GENERAL USE). COORDINATE EXACT LOCATION AND REQUIREMENTS PRIOR TO ROUGH-IN.
 - SENSITIVITY UNITS: 120V-18, 0.200. PROVIDE QUAD CEILING OUTLET IN CEILING ACCESS PANEL. SEE SPECIFICATION ON SHEET AA-5.0 FOR ADDITIONAL INFORMATION. MAKE FINAL CONNECTIONS. COORDINATE THE EXACT REQUIREMENTS AND LOCATION WITH TENANT.
 - SERVICE DOOR BUZZER SYSTEM: EDWARDS: 340-405-24VAC BUZZER, LOCATED ABOVE THE CEILING WHERE SHOWN, 852 WEATHERPROOF PUSHBUTTON, 592 TRANSFORMER, BUZZER SYSTEM WIRE NEED NOT BE INSTALLED IN CONDUIT. UNLESS REQUIRED BY THE LANDLORD OR LOCAL AUTHORITY. VERIFY PUSHBUTTON LOCATION WITH LANDLORD.
 - PROVIDE FLUSH, CEILING MOUNTED DUPLEX RECEPTACLE FOR CONNECTION TO CAMERA. RECEPTACLE AND COVERPLATE COLOR TO MATCH ADJACENT COLOR. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH TENANT PRIOR TO ROUGH-IN. REFER TO DETAIL #3 ON SHEET EG.0.0 FOR ADDITIONAL INFORMATION.
 - THE CIRCUIT USED TO POWER THE ELECTRONIC CASH REGISTERS (POS SYSTEM) SHALL NOT BE USED FOR ANY OTHER PURPOSE. THE CIRCUITS SHALL NOT SHARE THE NEUTRAL OR GROUND WITH OTHER EQUIPMENT. SEPARATE POWER, NEUTRAL, AND ISOLATED GROUND WIRES, MINIMUM #12AWG, SHALL NOT BE RUN TO THE NEUTRAL. DO NOT USE THE CONDUIT FOR GROUNDING. ELECTRONIC CASH REGISTER OUTLETS SHALL BE HUBBELL NO. 10-5362 OR APPROVED EQUAL.
 - TRENCH FLOOR AND WIRE AS SHOWN FOR CONNECTION TO RECEPTACLES, DATA OUTLETS AND LIGHT FIXTURES WITHIN CASH WRAPS. REPAIR TO MATCH EXISTING CONDITIONS. PROVIDE (3) 2" (1-NORMAL POWER, 1-ISOLATED GROUND, 1-DATA) AND 1" (1-CASHWRAP LIGHTING FIXTURE CIRCUIT. CONDUITS SHALL BE GROUPED IN ONE COMMON TRENCH. ROUTE CONDUIT UP THRU WALL OR COLUMN TO ELECTRICAL PANELS AND TELEPHONE BOARD AS INDICATED. ROUTE ALL CONDUIT WITHIN THE CASHWRAP. COORDINATE WITH FOREVER 21, ON-SITE TENANT COORDINATOR AND TENANT BEFORE PRIOR TO ROUGH-IN.
 - PROVIDE JUNCTION BOX ABOVE CEILING AND MAKE FINAL CONNECTION TO LIGHT BOX. COORDINATE WITH ARCHITECTURAL PLANS.
 - RECEPTACLE SUB-FED FROM GFI PROTECTED RECEPTACLE.
 - CEILING MOUNTED RECEPTACLE. ALIGN WITH FLOOR BOX. REFER TO ARCHITECTURAL PLANS #1.4.0 FOR EXACT LOCATION.
 - TRENCH AND REPAIR TO MATCH EXISTING FLOOR CONDITIONS FOR CONDUIT AND WIRE FOR CONNECTION TO FLOOR RECEPTACLES SHOWN. PROVIDE 2#12, #12G, IN 1". VERIFY ANY REQUIREMENTS WITH LANDLORD PRIOR TO BID. ROUTE CONDUIT UP THRU WALL OR COLUMN TO ELECTRICAL PANELS AS INDICATED.
 - EXHAUST FANS EF-1 & EF-2: 120V-18, FIXTURE SHALL BE CONTROLLED THROUGH LOCAL SWITCH INDICATED ON LIGHTING PLAN. EC TO PROVIDE 277-120V STEP-DOWN TRANSFORMER. FAN/LIGHT COMBINATION FIXTURE PROVIDED AND INSTALLED BY EC, WIRED BY EC. REFER TO MECHANICAL/PLUMBING EQUIPMENT SCHEDULE ON SHEET EG.0.0 FOR CIRCUITING INFORMATION.
 - ELECTRIC WATER HEATER EWH-1: 3KW, 208V-1Ø. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH MECHANICAL PLANS. REFER TO MECHANICAL/PLUMBING EQUIPMENT SCHEDULE ON SHEET EG.0.0 FOR CIRCUITING INFORMATION.
 - PROVIDE JUNCTION BOX FOR HAND DRYER. VERIFY EXACT REQUIREMENTS AND MOUNTING HEIGHT WITH ARCHITECTURAL PLANS PRIOR TO ROUGH-IN.
 - MECHANICAL EQUIPMENT. REFER TO MECHANICAL/PLUMBING EQUIPMENT SCHEDULE ON SHEET EG.0.0 FOR CIRCUITING INFORMATION.
 - EC TO PROVIDE 5-GANG BOX AND 3/4" C TO AUDIO EQUIPMENT RACK JUNCTION BOX FOR AUDIO SPEAKER SYSTEM. VERIFY EXACT LOCATION AND ALL REQUIREMENTS WITH ARCHITECT PRIOR TO BID.
 - EC TO PROVIDE (1) QUAD OUTLET AND 2-GANG BOX WITH (2) 3/4" C STUBBED INTO SALES AREA FOR AUDIO SPEAKER SYSTEM. OUTLET AND BOX SHALL BE LOCATED ADJACENT TO AUDIO EQUIPMENT RACK JUNCTION BOX. VERIFY EXACT LOCATION AND ALL REQUIREMENTS WITH ARCHITECT PRIOR TO BID.
 - EC TO PROVIDE (4) QUAD OUTLETS FOR IT RACK. PROVIDE ADDITIONAL CONDUITS AS REQUIRED. VERIFY EXACT LOCATION AND REQUIREMENTS WITH ARCHITECT PRIOR TO BID.
 - LANDLORD PROVIDED FIRE ALARM CONTROL PANEL. REFER TO DETAIL ON SHEET EG.0.0 FOR ADDITIONAL INFORMATION.
 - PROVIDE FIRE ALARM DEVICE AS INDICATED. CONNECT TO LANDLORD PROVIDED FIRE ALARM CONTROL PANEL. REFER TO DETAIL ON SHEET EG.0.0 FOR ADDITIONAL INFORMATION.
 - FIRE ALARM DEVICE PROVIDED AND INSTALLED BY LANDLORD. REMOVE EXISTING DEVICE AND MAINTAIN EXISTING WIRING CONTINUITY. THE DEVICE SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING CONSTRUCTION. REINSTALL DEVICE ON NEW CEILING/WALL FINISH.



AUDIO EQUIPMENT NOTES

- SALES AREA F33 BASS MODULES ARE TO BE RECESSED IN CEILING IN ACCORDANCE WITH ALL APPLICABLE LOCAL CODES AND INSTALLATION MANUAL. SEE SPEAKER INSTALLATION DRAWINGS.
- SALES AREA F33 SATELLITE SPEAKERS ARE TO BE MOUNTED TO CEILING, NEAREST TO CEILING AND WALL INTERSECTION. SEE SPEAKER INSTALLATION DRAWINGS.
- OPEN CEILING AREA DS 100SE SPEAKERS ARE TO BE WALL MOUNTED ABOVE TRANSITION TRELLIS, TYP. 13' AFF UNLESS OTHERWISE ILLUSTRATED. THESE SPEAKERS SHALL MATCH OPEN CEILING COLOR.
- DRESSING ROOM AREA DS 16F RECESSED SPEAKERS ARE TO BE RECESSED IN CEILING IN ACCORDANCE WITH ALL APPLICABLE LOCAL CODES AND INSTALLATION MANUAL. SEE SPEAKER INSTALLATION DRAWINGS.
- AUDIO EQUIPMENT RACK IS TO BE MOUNTED AT 7' AFF IN STOCK ROOM ACCORDING TO MANUFACTURER'S INSTALLATION MANUAL AND ALL APPLICABLE LOCAL CODES. EC TO PROVIDE 2-GANG BOX WITH (2) 3/4" C STUBBED INTO SALES AREA. EC TO PROVIDE (1) 20A QUAD OUTLET (LON) WITH DEDICATED CIRCUIT ADJACENT TO AUDIO EQUIPMENT J-BOX.
- SHELF FOR MUSIC PLAYER IS TO BE WALL MOUNTED DIRECTLY UNDER AUDIO EQUIPMENT RACK. SEE SPEAKER INSTALLATION DRAWINGS.
- VOLUME CONTROLS TO BE MOUNTED AT LIGHT SWITCH HEIGHT BESIDE STOCK ROOM DOOR NEAREST SALES AREA. EC TO PROVIDE (1) 5-GANG BOX (FOR CC-64 ONLY) WITH 3/4" C TO AUDIO EQUIPMENT RACK J-BOX.
- GC/EC RESPONSIBLE FOR PROVIDING AND INSTALLING RACK BACKER BOARD, ELECTRICAL OUTLETS, AND ALL CONDUIT.
- ALL EXPOSED CABLE/CONNECTORS SHALL BE WHITE AND INCONSPICUOUS. THERE SHOULD BE NO VISIBLE CABLES.
- VERIFY DJ WALL PLATE LOCATION WITH PROJECT MANAGER PRIOR TO PRE-WIRE AND INSTALLATION.
- CONTACT PROJECT MANAGER IMMEDIATELY IN THE EVENT OF OBSTRUCTION TO ANY SPEAKER - INCLUDING BUT NOT LIMITED TO: SIGNS, LIGHT FIXTURES, CAMERAS, HVAC, ETC. NEVER INSTALL SPEAKER BEHIND OBSTRUCTION.

FOREVER 21, INC.
 3880 N. MISSION ROAD
 LOS ANGELES, CA 90031
 213.747.5100 TEL
 213.741.5111 FAX

NOTES: THE DESIGNS SHOWN AND DESCRIBED HEREIN INCLUDING ALL TECHNICAL DRAWINGS, GRAPHICS AND MODELS THEREOF, ARE PROPRIETARY AND CANNOT BE COPIED OR COMMERCIALY EXPLOITED, IN WHOLE OR IN PART, WITHOUT EXPRESS WRITTEN PERMISSION OF THE FOREVER 21. THESE ARE AVAILABLE FOR LIMITED REVIEW AND EVALUATION BY CLIENTS, CONSULTANTS, CONTRACTORS, GOVERNMENT AGENCIES, VENDORS AND OTHER PERSONNEL ONLY IN ACCORDANCE WITH THIS NOTICE.
 COPYRIGHT © FOREVER 21
 2014 ALL RIGHTS RESERVED.

START DATE: DECEMBER, 2014
 F21 JOB NO: 3K-083
 STORE NO: 0618
 DRAWN: SJD
 CHECKED: MAR

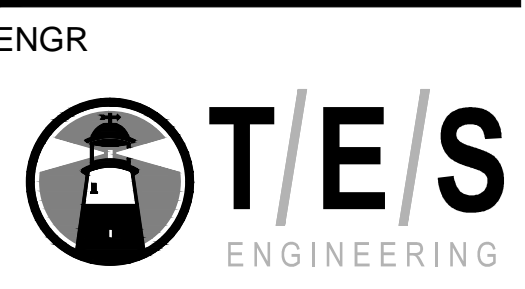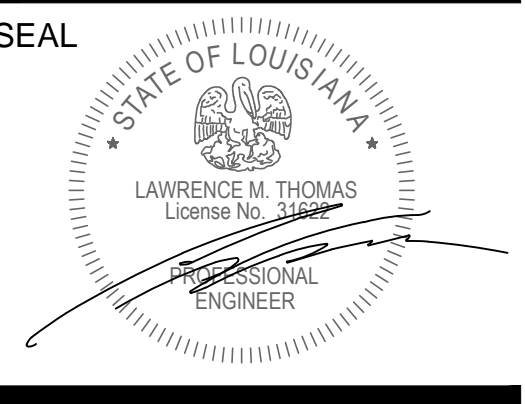


ENGR

FOREVER 21
 TENANT IMPROVEMENT
FREMAUX TOWN CENTER
 1000 FREMAUX AVE., SUITE 100
 SUDELL, LA 70468

SUBMITTALS:
 01.20.2015
 LANDLORD PRELIM SUBMITTAL
 03.05.2015
 BID SET

REVISIONS		
NO	DATE	DESCRIPTION

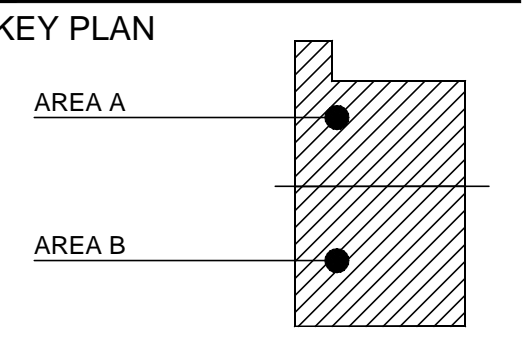

SHEET NAME

POWER PLAN

SHEET NUMBER

E2.1.0

SCALE: 1/8"=1'-0"