



FACE MOUNT HANGERS LU/U/HU STANDARD JOIST HANGERS


SIMPSON
Strong-Tie

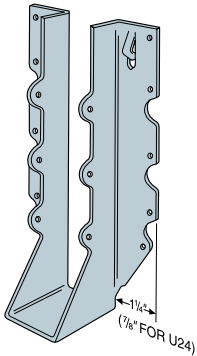


U210




HUC412
Concealed
Flanges



LU28
(except
LU Roughs)

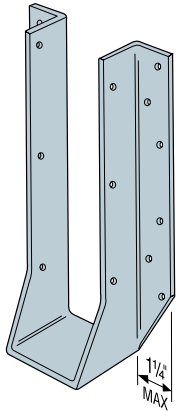


HU214
Projection seat on
most models for
maximum bearing and
section economy.



HU68

Typical LU28
Installation



See Hanger tables on pages 51 to 57. See Hanger Options on pages 158 for hanger modifications, which may result in reduced loads.

LU—Value engineered for strength and economy. Precision-formed—engineered for installation ease and design value.

U—The standard U hanger provides flexibility of joist to header installation. Versatile fastener selection with tested allowable loads.

HU—Most models have triangle and round holes. To achieve maximum loads, fill both round and triangle holes with common nails. These heavy-duty connectors are designed for schools and other structures requiring additional strength, longevity and safety factors.

MATERIAL: See tables on pages 51 to 57.

FINISH: Galvanized

INSTALLATION: • Use all specified fasteners. See General Notes.

• HU—can be installed filling round holes only, or filling round and triangle holes for maximum values.

OPTIONS: • HU hangers available with the header flanges turned in for 2 5/16" width and larger, with no load reduction—order HUC hanger.


• See Hanger Options on page 158, for sloped and/or skewed U/HU models, and HUC (concealed flange) models.

• HU only—rough beam sizes available by special order.

• See page 57 for stocked U hanger rough sizes tables. Rough sizes are not available in 8x.

• Also see LUS and HUS series.

*Model configurations
may differ from
those shown.
Some HU models
do not have
triangle holes.
Consult factory.*



Typical HU
Installation