

# FACE MOUNT HANGERS U/HU

I-JOIST & STRUCTURAL  
COMPOSITE LUMBER HANGERS

See Hanger tables on pages 72 to 76. See Hanger Options on page 158 for hanger modifications, which may result in reduced loads.

U—The standard U hanger provides flexibility of joist to header installation. Versatile fastener selection with tested allowable loads.

HU—Most models have triangle and round holes. To achieve maximum loads, fill both round and triangle holes with common nails. These heavy-duty connectors are designed for schools and other structures requiring additional strength, longevity and safety factors.

**MATERIAL:** See tables on pages 72 to 76.


**FINISH:** Galvanized

**INSTALLATION:** • Use all specified fasteners. See General Notes.


- HU—can be installed filling round holes only, or filling round and triangle holes for maximum values.
- Web Stiffeners are required for all I-joists used with these hangers.

**OPTIONS:** • HU hangers available with the header flanges turned in for  $2\frac{1}{8}$ " and larger widths, with no load reduction—order HUC hanger.


- See Hanger Options on page 158, for sloped and/or skewed U/HU models, and HUC (*concealed flange*) models.
- See also HUS series.

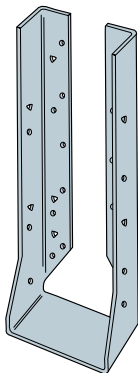


HU410



HUC412  
Concealed  
Flanges



Typical HU  
Installation



Typical HU Installation

*Model configurations may differ from those shown. Some HU models do not have triangle holes. Consult factory for details.*