

FACE MOUNT HANGERS U/HU

I-JOIST & STRUCTURAL
COMPOSITE LUMBER HANGERS

SIMPSON

Strong-Tie

See Hanger tables on pages 72 to 76. See Hanger Options on page 158 for hanger modifications, which may result in reduced loads.

U—The standard U hanger provides flexibility of joist to header installation. Versatile fastener selection with tested allowable loads.

HU—Most models have triangle and round holes. To achieve maximum loads, fill both round and triangle holes with common nails. These heavy-duty connectors are designed for schools and other structures requiring additional strength, longevity and safety factors.

MATERIAL: See tables on pages 72 to 76.


FINISH: Galvanized

INSTALLATION: • Use all specified fasteners. See General Notes.

- HU—can be installed filling round holes only, or filling round and triangle holes for maximum values.
- Web Stiffeners are required for all I-joists used with these hangers.


OPTIONS: • HU hangers available with the header flanges turned in for $2\frac{5}{16}$ " and larger widths, with no load reduction—order HUC hanger.

- See Hanger Options on page 158 and 161, for sloped and/or skewed U/HU models, and HUC (concealed flange) models.
- See also HUS series.


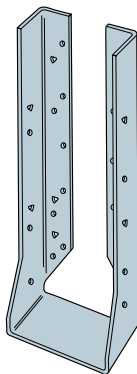


HUC412
Concealed
Flanges

HU410



Typical HU
Installation



Typical HU Installation

Model configurations may differ from those shown. Some HU models do not have triangle holes. Consult factory for details.