

TOTAL HEAD

REPRIMING LIFTS


PERFORMANCE CURVE

RPM	650	750	850	950	1050-1150	1250	1350	1450	1550	1650	1750	1850-1950
FEET	2	4	6	8	9	11	12	14	15	17	20	21
METERS	.61	1.2	1.8	2.4	2.7	3.4	3.7	4.3	4.6	5.2	6.1	6.4

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.  
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

VOLUTE 10525D CURVE T4A-B-9  
 IMPELLER 10528 MODEL T4A-B  
 SIZE 4"X4" IMP.DIA. 8.50"  
 SP.GR. 1.0 RPM NOTED

Note:  
 Select performance within operating range of curve.

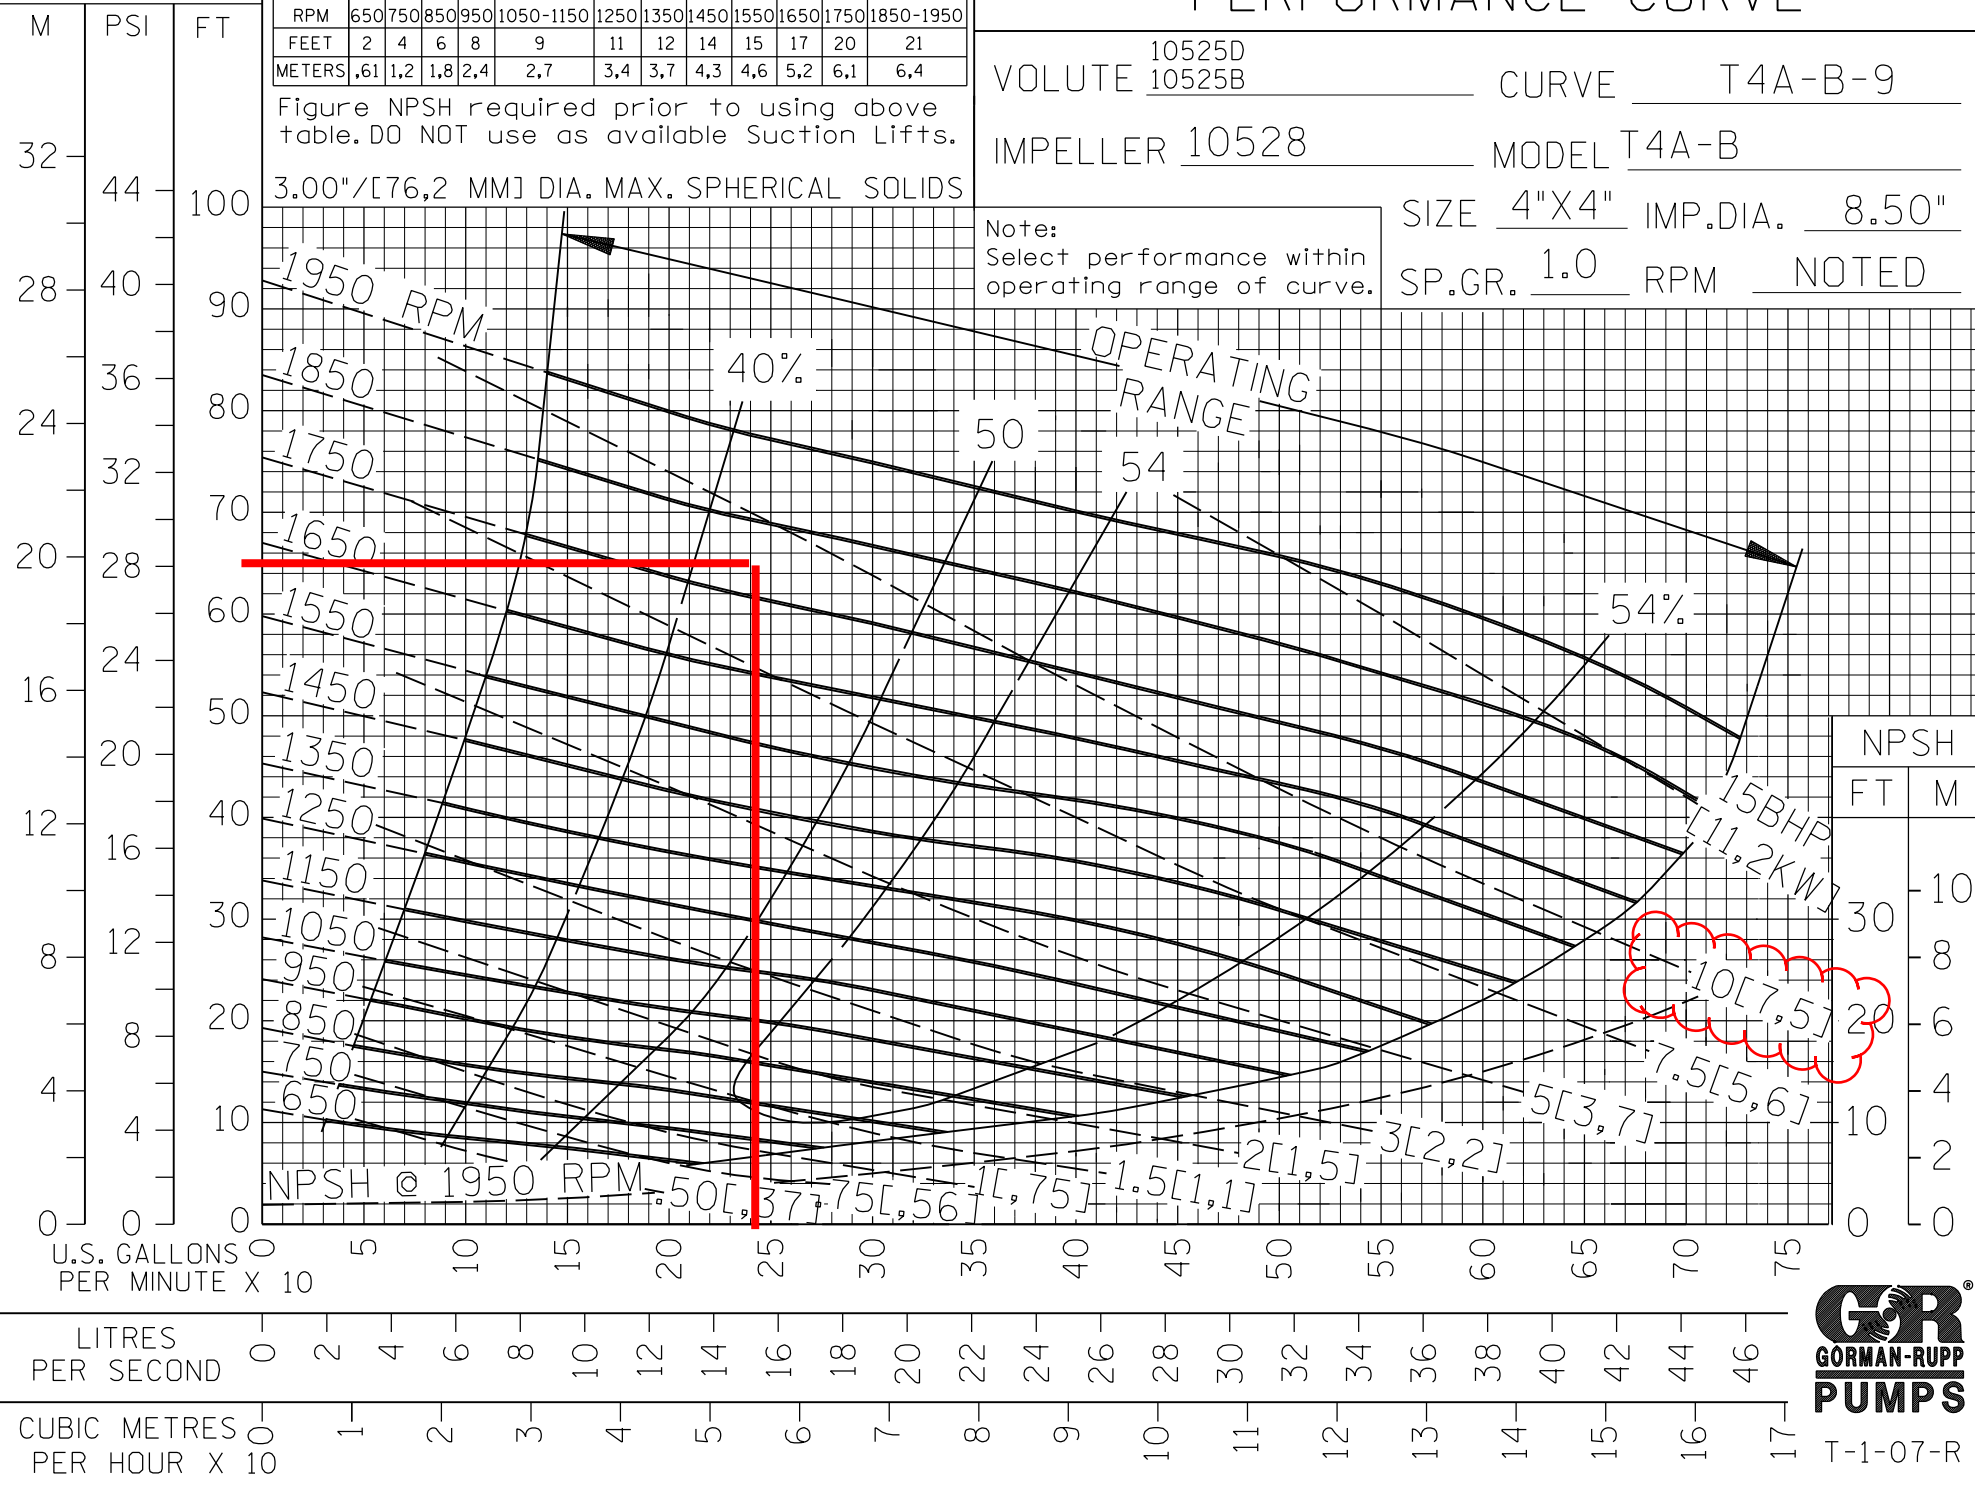

FILE NO. t4ab.s09



T-1-07-R