

Ordering Information

Applicable product:		
Pump on left	K-1479	shown
Pump on right	K-1481	not shown
Accessories/hardware:		
Tower	K-1040	required
Door enclosure	K-9759	required
Drain	K-7161-AF	recommended
Coralais Rite-Temp	K-1097	recommended
Coralais Two-handle	K-1096	

Requirements Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V., 20 A, 60 Hz

Product Information

Fixture*:	basin area	top area	weight	
Bathing well	41" x 29"	56" x 36"	130 lbs.	
	water depth	capacity		
To overflow	15"	85 gals.**		
* Approximate measurements for comparison only. ** 48 gallon minimum required for BodySpa operation.				
Pump:	HP	V	Hz	A
1-speed	1	120	60	16.5

Installation Notes

If installing a rim-mount faucet, be sure there is adequate clearance under the rim prior to drilling holes, plus, consult local and national codes for minimum air gap requirements. Allow 85" to 85-1/2" from sub-floor to finished ceiling or header for proper enclosure installation. Top of unit must be enclosed to retain heat and contain water spray.

Pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 24" of the pump.

Roughing-In Notes

Fixture dimensions are nominal and conform to tolerances in ANSI Standard Z124.1.


Pump extends 1/2" beyond the bath rim. Make provisions during rough-in or installation.

No change in measurements if connected with drain illustrated.

Cut-out 58" x 40"

Minimum access:

Pump/control 20" W x 12" H required

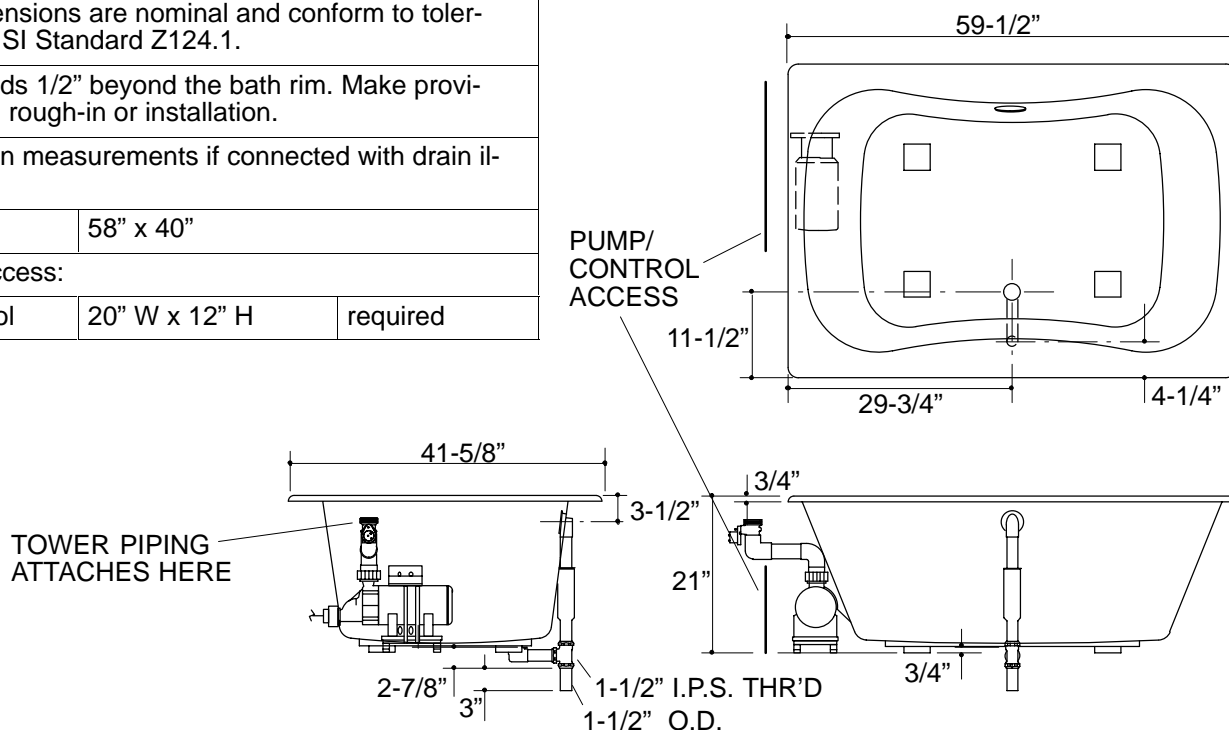

1.25>132