

Ordering Information

| | | |
|---|---------|-------------|
| Accessories/hardware: | | |
| Drain | K-11677 | recommended |
| Vinyl tiling-in bead* | K-1179 | optional |
| *Use K-1179 vinyl bead when wall material contacts any top surface of bath. | | |

Required Electrical Service

| | |
|---|---------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): | |
| Pump/control | 120 V., 15 A, 60 Hz |

Product Information

| | | | |
|--------------|--------------|--------------|--------|
| Fixture*: | basin area | top area | weight |
| Bathing well | 1346 x 660mm | 1651 x 864mm | 32 Kg. |
| | water depth | capacity | |
| To overflow | 381mm | 295 litres | |


* Approximate measurements for comparison only.

| | | | | |
|---------|-----|-----|----|-----|
| Pump: | HP | V | Hz | A |
| 1-speed | 3/4 | 120 | 60 | 9.5 |

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 610mm of the pump.

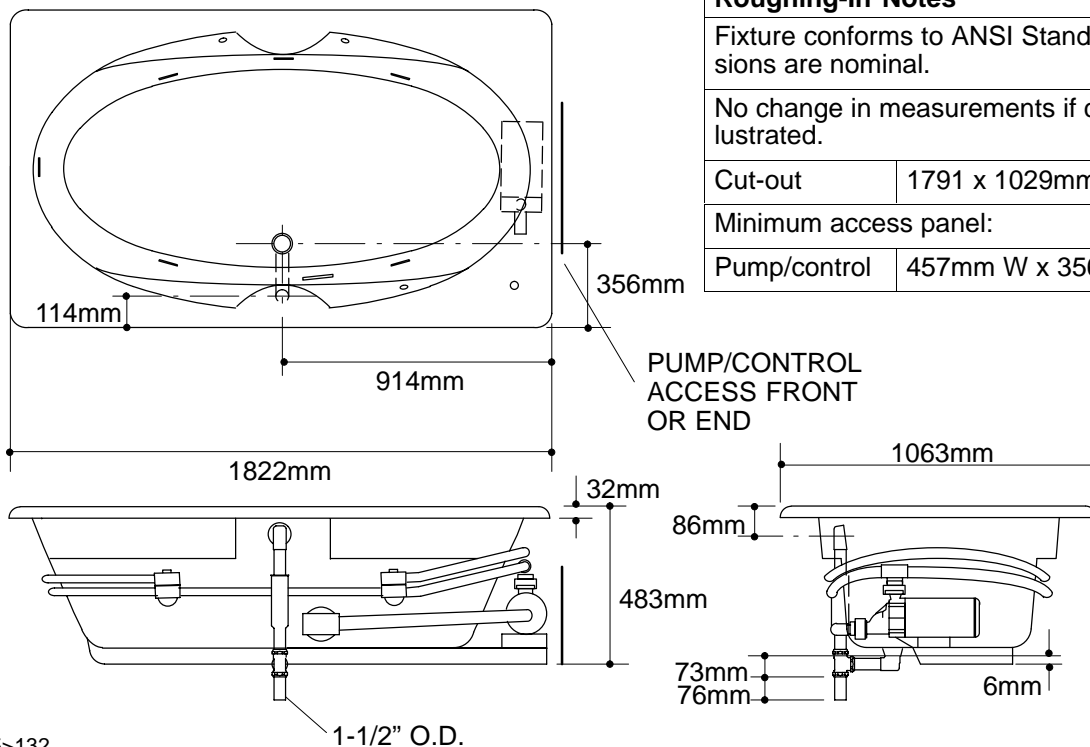

Roughing-In Notes

Fixture conforms to ANSI Standard Z124.1. All dimensions are nominal.

No change in measurements if connected with drain illustrated.

Cut-out 1791 x 1029mm

Minimum access panel:

Pump/control 457mm W x 356mm H required

1.25>132

K-1131 System Basic 7242 Bath Whirlpool
114857-1M-AA (A)

KOHLER®