

GENERAL NOTES:

1. ALL WORK SHALL BE IN ACCORDANCE WITH THE INTERNATIONAL RESIDENTIAL CODE 2018 EDITION, LOCAL AMENDMENTS, NFPA 101, NOTHING CONTAINED IN THIS SPECIFICATION OR SHOWN ON THE PLANS SHALL BE CONSTRUCTED AS TO CONFLICT WITH ANY LOCAL MUNICIPAL OR STATE LAW OR REGULATIONS. ALL SUCH LAWS OR REGULATIONS ARE HEREBY MADE PART OF THIS SPECIFICATION AND THE PLANS ARE THE MINIMUM THAT WILL BE ACCEPTED. CONTRACTOR BEING REQUIRED TO MEET BUILDING AND FIRE DEPARTMENT REQUIREMENTS AS APPROVED BY THE OWNER.
2. ALL WORK SHALL BE ALIGNED AND POSITIONED IN ACCORDANCE WITH PLAN DIMENSIONS WITH ALL SCALE DIMENSIONS BEING VERIFIED PRIOR TO USE.
3. ALL WOOD IN CONTACT WITH MASONRY, CONCRETE OR STEEL SHALL BE PRESSURE TREATED.
4. GENERAL CONTRACTOR SHALL REPORT ALL IRREGULARITIES AND DISCREPANCIES TO THE DESIGNER BEFORE PROCEEDING WITH THE WORK.
5. CONTRACTOR SHALL GUARANTEE ALL WORK FOR (1) YEAR AFTER DATE OF ACCEPTANCE BY OWNER.
6. ALL WINDOW AND DOOR OPENING DIMENSIONS SHALL BE VERIFIED WITH WINDOW AND DOOR SUPPLIERS.
7. ANY BLOCKING, NAILERS, FLASHING OR OTHER REQUIRED FRAMING MATERIAL SHALL BE INSTALLED AS REQUIRED AS IF THEY WERE ORIGINALLY DETAILED.
8. THE CONTRACTOR SHALL BE TOTALLY RESPONSIBLE FOR ALL MEANS AND METHODS OF CONSTRUCTION. THE DESIGNER'S PERIODIC VISITS TO THE SITE SHALL NOT RELIEVE THE CONTRACTOR OF TOTAL RESPONSIBILITY AND HE SHALL IN ANY EVENT HOLD THE DESIGNER HARMLESS FOR ANY LITIGATION ARISING FROM INJURY.
9. ALL STUCCO, METAL LATH, AND DRYWALL SHALL MAINTAIN THE STANDARDS AS OUTLINED IN THE U.S. GYPSUM CONSTRUCTION HANDBOOK, ESPECIALLY IN REGARDS TO ACCESSORY PRODUCTS, SUCH AS, CONTROL AND EXPANSION JOINTS, NO STUCCO ON FOAM ALLOWED WITHIN 10' OF FINISHED GRADE.
10. ALL CONSTRUCTION MUST MEET APPLICABLE CODES AND ORDINANCES

GENERAL AND STRUCTURAL NOTES:

1. ALL WORK BY ALL TRADES SHALL BE COMPLETED IN ACCORDANCE WITH ALL APPLICABLE CODES, ORDINANCES, STANDARDS, OR RESTRICTIONS WHETHER INDICATED ON THE PLANS OR NOT.
2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND ROUGH OPENINGS PRIOR TO CONSTRUCTION. USE FIGURED DIMENSIONS ARE NOMINAL.
3. CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE GOVERNING ENERGY CODE AND BUILD IN ACCORDANCE WITH ALL PROVISIONS OF THE CODE.
4. ALL SECTIONS, DETAILS AND NOTES SHOWN ON THESE DRAWINGS ARE INTENDED TO BE TYPICAL AND SHALL APPLY TO SIMILAR SITUATIONS UNLESS OTHERWISE NOTED.
5. SOIL BEARING CAPACITY IS ASSUMED TO BE 1500 PSI. THE DESIGNER HAS NO MEANS OF DETERMINING CAPACITIES WITHOUT SUBSURFACE GEOTECHNICAL INVESTIGATION BEING PROVIDED BY THE OWNER OR CONTRACTOR, AND THE OWNER TAKES FULL RESPONSIBILITY FOR THE PROPERTIES OF THE SOIL. IF A SUBSURFACE GEOTECHNICAL INVESTIGATION IS PROVIDED PRIOR TO CONSTRUCTION AND DOES NOT MEET THE BEARING CAPACITY OF 1500 PSI CONTACT THE DESIGNER IMMEDIATELY TO RECTIFY THE DESIGN TO MEET THE ACTUAL SOIL BEARING CAPACITY.
6. REMOVE ALL VEGETATION, ORGANIC SURFACE SOILS, AND LOOSE UPPER SURFACE LAYERS. THIS WILL INVOLVE REMOVAL OF APPROXIMATELY 6" TO 12" OF MATERIAL DEPENDING ON THE LOCATION ON THE SITE. THIS MATERIAL MAY BE STOCKPILED AND USED AT A LATER TIME FOR TOPSOIL. GENERAL SITE GRADING AND LANDSCAPING PURPOSES. SOME "MUCK" POCKETS MAY BE ENCOUNTERED WHICH WILL REQUIRE DEEPER EXCAVATIONS AND SHOULD BE REPLACED WITH SELECT STRUCTURAL FILL. COMPACT NEAR SURFACE SOIL TO 95% OF STANDARD PROCTOR, ATM D698, BEFORE STRUCTURAL FILL OR SUBASE IS INSTALLED. A HEAVY VIBRATORY ROLLER WILL BE NEEDED TO ACCOMPLISH THIS COMPACTION.
7. SELECT FILL FOR THE SITE SHALL BE PLACED IN EIGHT (8) INCH LIFTS, TO THE DESIRED FINISH BASE ELEVATION AND COMPACTED TO 95% STANDARD PROCTOR, ASTM D698. THIS MATERIAL SHALL CONTAIN LESS THAN 25% PASSING THE #200 SIEVE, THIS FILL SHALL EXTEND A MIN. OF 5 FEET BEYOND THE PERIMETER OF THE FOUNDATION BEFORE SLOPING TO GRADE.
8. FOOTINGS SHOULD EXTEND AT LEAST 12" INTO NATIVE SOIL.
9. CONCRETE SHALL COMPLY WITH ALL THE REQUIREMENTS OF ASTM 694-61 FOR ALL MEASURING, MIXING, AND TRANSPORTING.
10. CONCRETE SHALL MEET DESIGNED COMPRESSIVE STRENGTH AS NOTED ON DRAWINGS WITHIN 28 DAYS.
11. REINFORCING STEEL SHALL BE ASTM A615 GRADE 60 FY* 60,000 PSI DEFORMATION BARS IN ACCORDANCE WITH THE LATEST ASTM SPECIFICATIONS.
12. REINFORCING STEEL SHALL BE LAPPED 48 BAR DIAMETER MIN. WHERE SPLICED AND SHALL BE EITHER SEPARATED BY ONE BAR DIAMETER OR WIRED TOGETHER.
13. LAP ALL REINFORCING STEEL AT CORNER SPLICES 48 BAR DIAMETER MIN. AND STAGGER SPLICES.
14. WELDED WIRE MESH TO BE LAPPED 6" AT SPLICE MINIMUM
15. PROVIDE ROOF OPENINGS AS REQUIRED FOR MECHANICAL EQUIPMENT, EXHAUST FANS, ETC.
16. ALL WALL SYSTEMS SHALL BE BRACED AS REQUIRED DURING ERECTION BY CONTRACTOR.
17. ALL WOOD IN CONTACT WITH CONCRETE, MASONRY, OR STEEL SHALL BE PRESSURE PRESERVATIVE TREATED.
18. INTERIOR NON-BEARING STUD WALLS TO BE 16' O.C. WITH P.T. BASE PLATE AND SINGLE TOP PLATE.
19. ALL HEADERS OVER DOORS SHALL BE DOUBLE OR TRIPLE 2"x4" (FOR WOOD FRAME NON BEARING WALL CONSTRUCTION) AND DOUBLE OR TRIPLE 2"x12" BEAMS AT LOAD BEARING WALLS, NAILED TOGETHER WITH 10D NAILS STAGGERED AT 6" O.C.
20. FRAMING ANCHORS ARE REQUIRED FOR WOOD FRAMING MEMBERS WHICH ARE PART OF WOOD BEARING WALLS (I.E. PLATES, STUDS, JOISTS, TRUSSES, BEAMS, ETC.) REFER TO DETAILS, SECTIONS, ETC. FOR STRAPPING, ANCHORING AND NAILING REQUIREMENTS.
21. ALL WOOD HEADERS ARE TO BE DROPPED UNLESS OTHERWISE NOTED ON DRAWINGS.
22. FOR WOOD FRAME CONSTRUCTION: PROVIDE 2"X STUDS (REFER TO DRAWING FOR STUD WIDTH) AT BEARING POINTS AS FOLLOWS:
 -HEADER SPANS UNDER 6'-0" TO HAVE (2) 2"X AT BEARING POINTS.
 -HEADER SPANS OVER 6'-0" TO HAVE (3) 2"X AT BEARING POINTS WITH SHOULDER STUDS.


DISCLAIMER:

DESIGNER MAKES NO REPRESENTATIONS CONCERNING ACCURACY OF THESE DOCUMENTS AND THEIR COMPLETENESS. CONTRACTOR SHALL BE RESPONSIBLE FOR INSURING ALL CODE, ORDINANCE, AND SAFETY REQUIREMENTS ARE MET AND CONTRACTOR SHALL BE RESPONSIBLE FOR ALL COSTS AND EXPENSES ASSOCIATED THEREWITH.


OWNER SHALL INDEMNIFY AND HOLD DESIGNER HARMLESS FROM AND AGAINST ANY AND ALL LIABILITIES, CLAIMS AND COSTS (INCLUDING REASONABLE ATTORNEY'S FEES, PENALTIES AND FINES) FOR DEATH, INJURY OR DAMAGES TO PERSONS OR PROPERTY ARISING FROM (A) ANY DEFAULT BY DESIGNER IN THE PERFORMANCE OF ITS OBLIGATIONS UNDER THESE DOCUMENTS, OR (B) ANY ACTS, OMISSIONS, OR NEGLIGENCE OF DESIGNER OR ITS AGENT AND EMPLOYEES.

IF ANY ACTION IS BROUGHT AGAINST DESIGNER UPON ANY SUCH CLAIM, OWNER SHALL CAUSE SUCH ACTION TO BE DEFENDED, AT ITS EXPENSE, BY COUNSEL REASONABLY SATISFACTORY TO DESIGNER. ANY AND ALL CLAIMS AND DISPUTES AND OTHER MATTERS IN QUESTION ARISING OUT OF RELATING TO THESE DOCUMENTS, SHALL BE REFERRED TO ARBITRATION BY AN ARBITRATOR MUTUALLY AGREEABLE TO DESIGNER AND OWNER.

A NEW RESIDENCE FOR: TIM AND DEBRA NORTON 419 SANDY HOOK DRIVE PASS CHRISTIAN, MS 39571

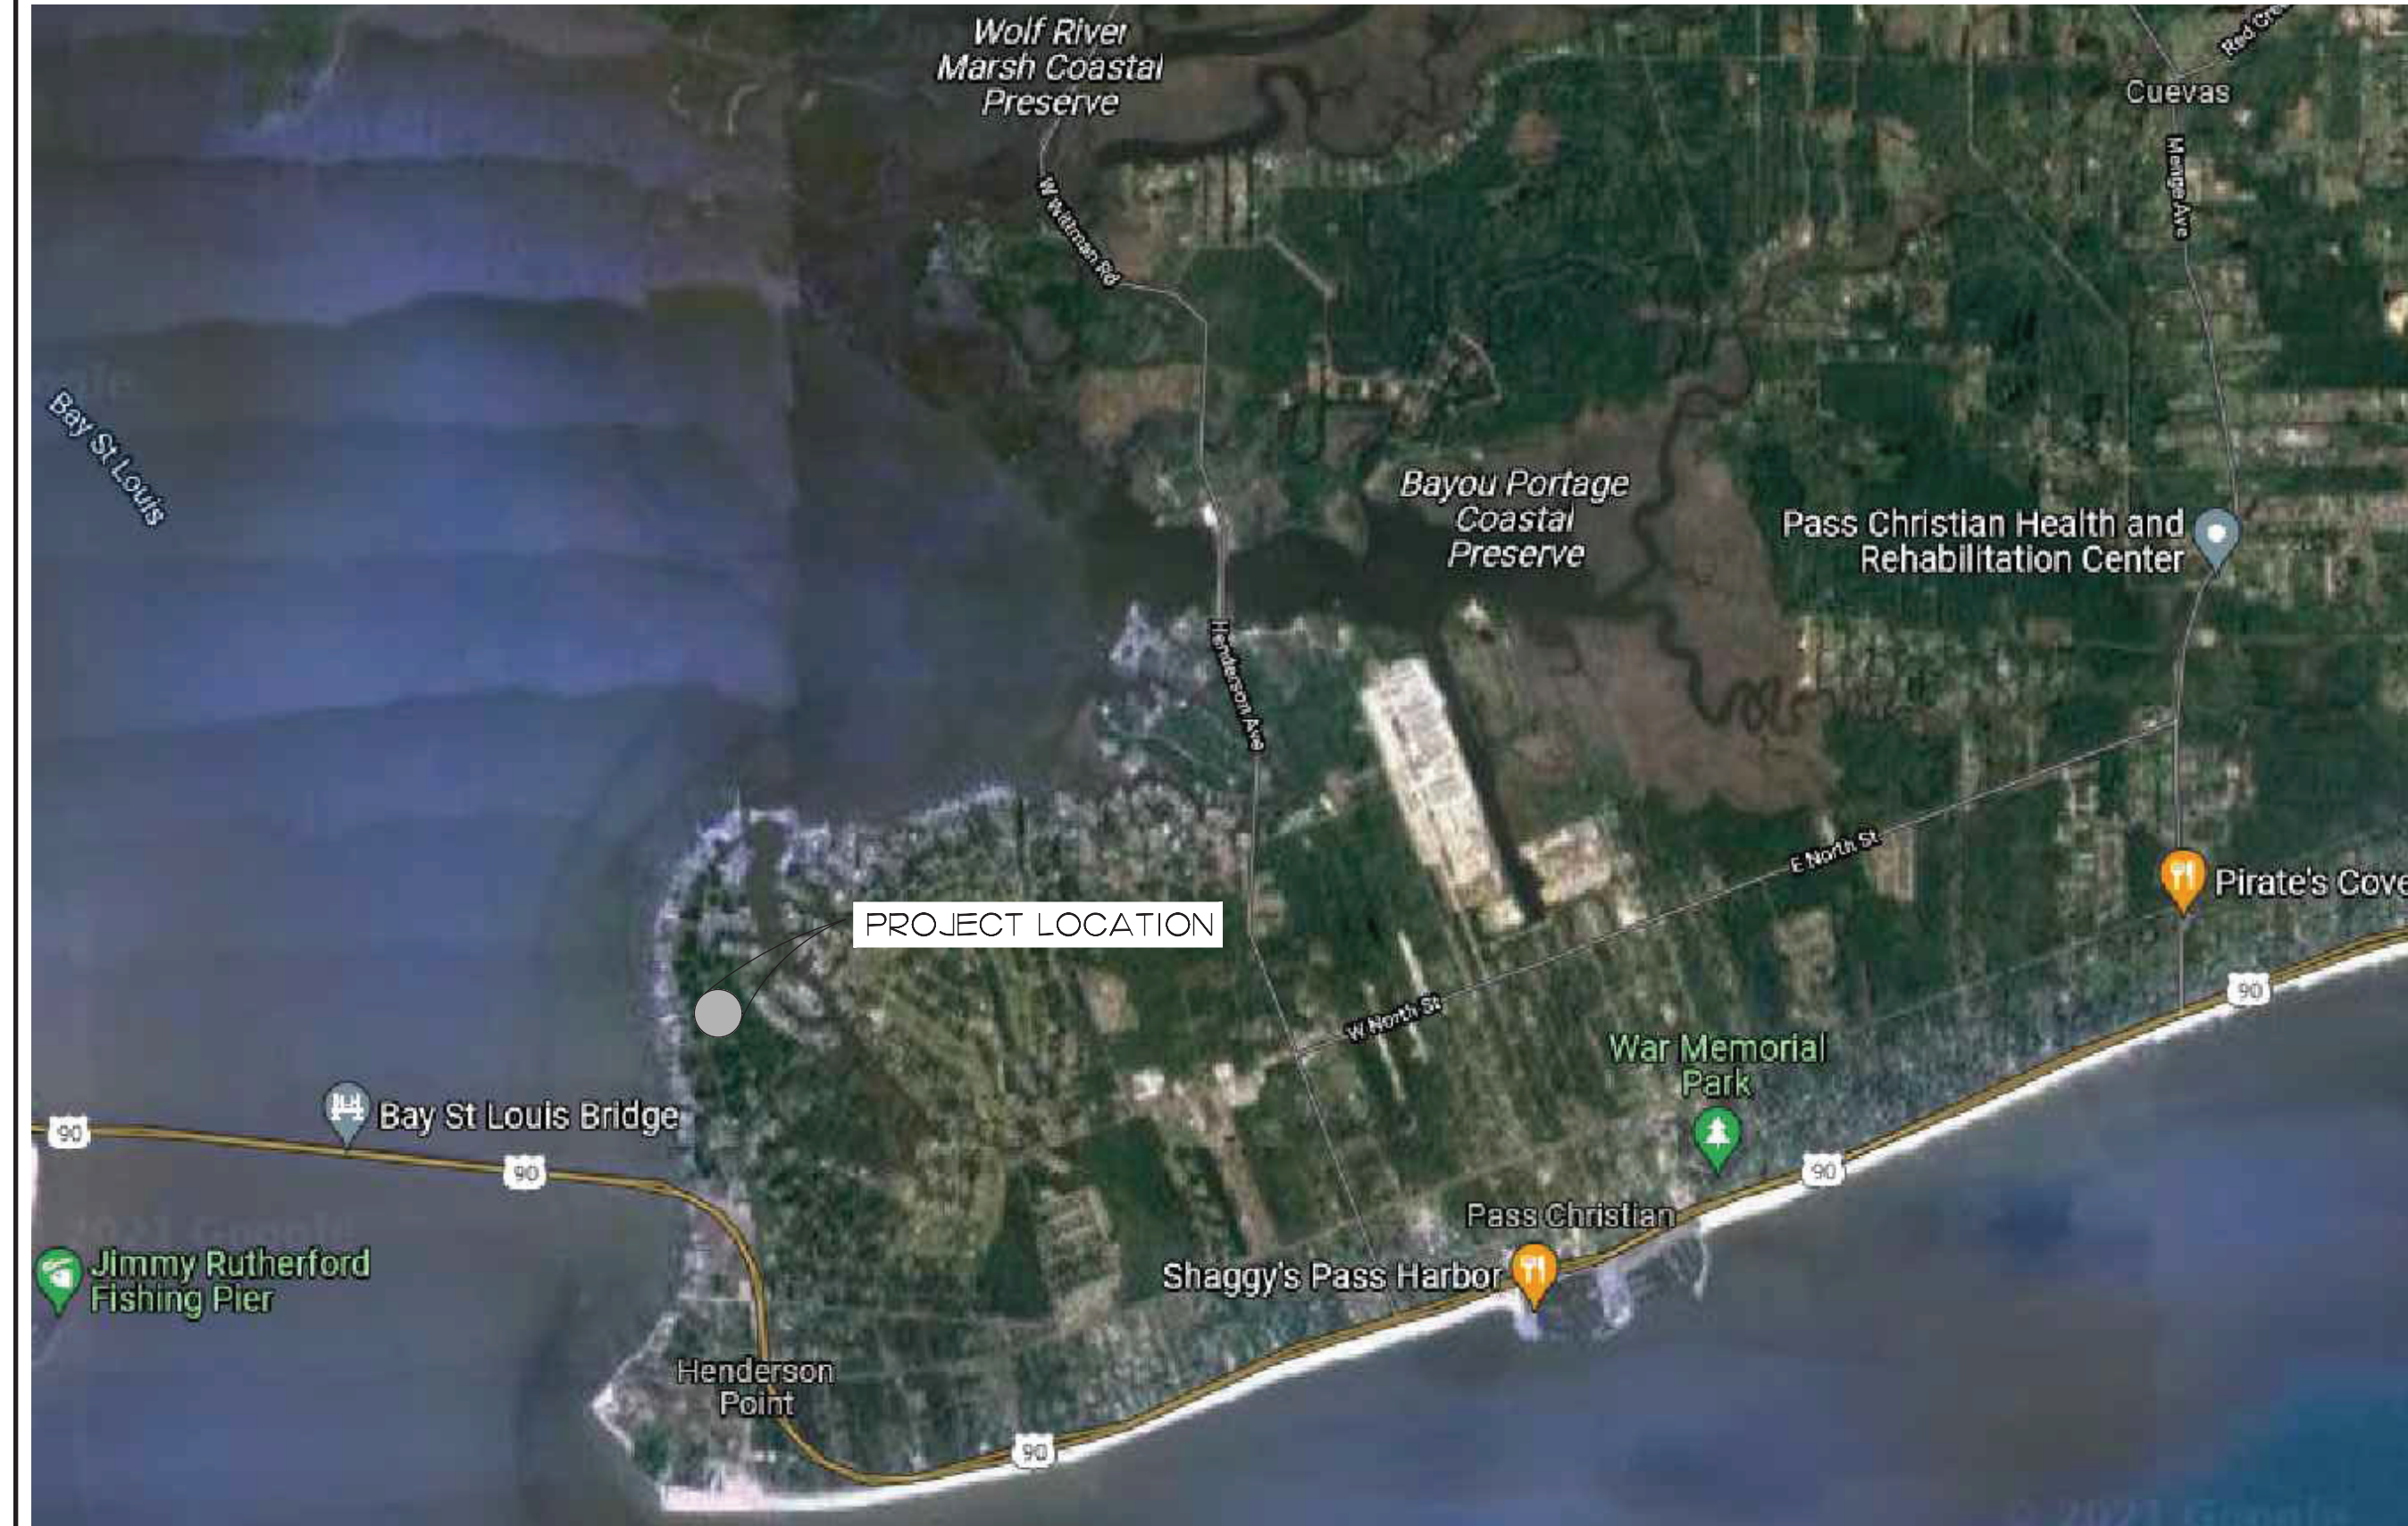

VICINITY MAP

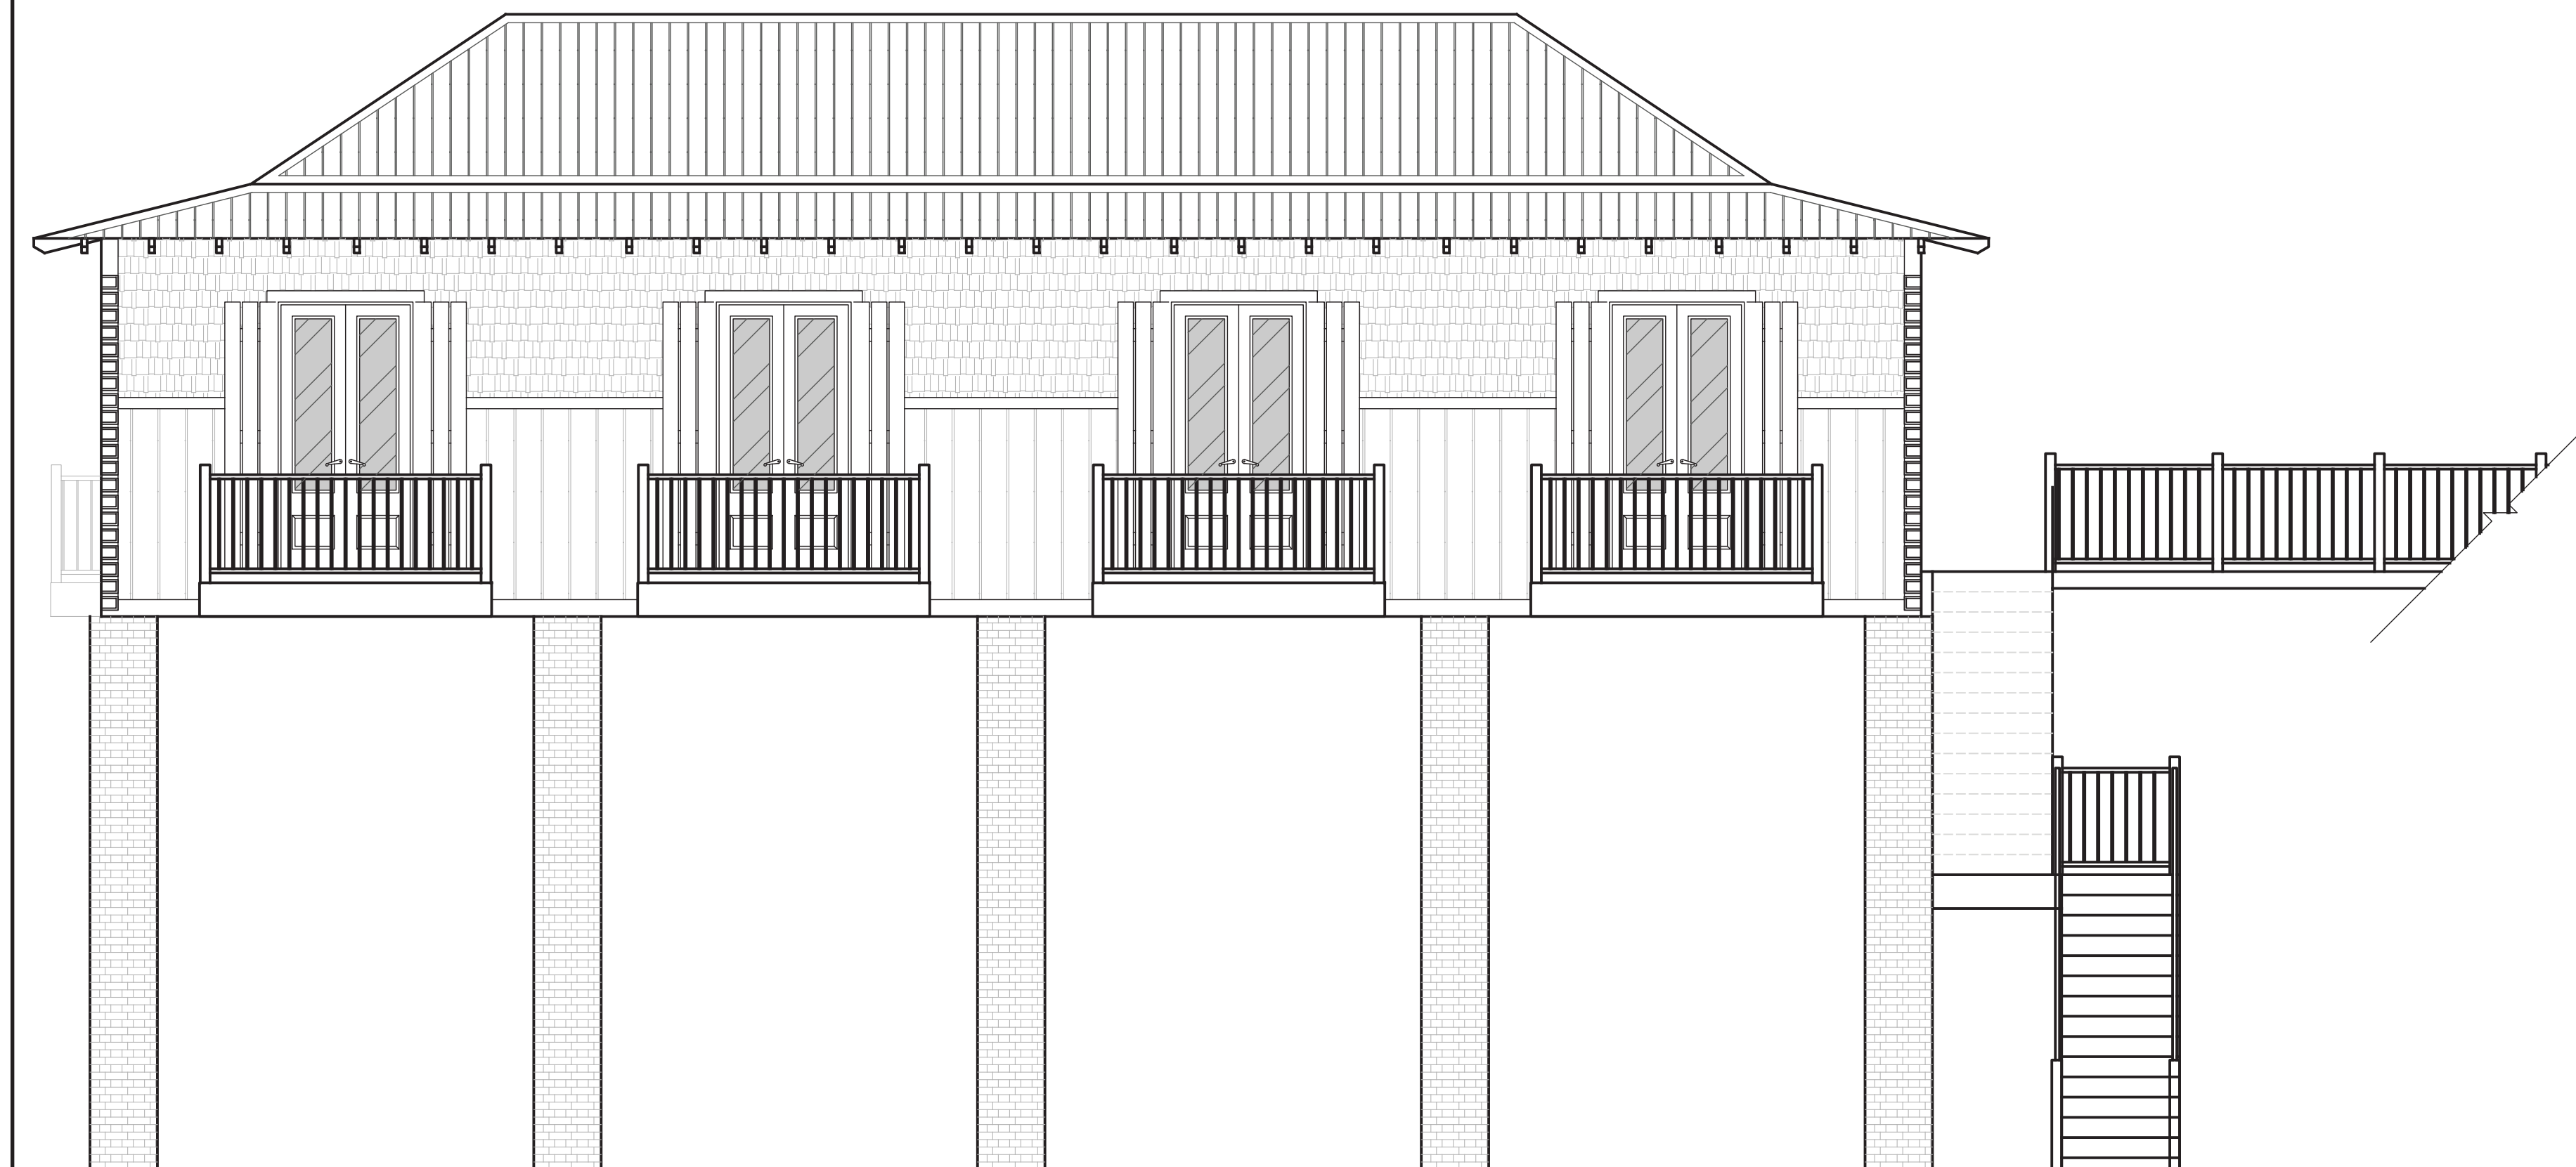

RESIDENTIAL BUILDING CODE 2018 INFO & GENERAL DATA

ZONING:	R-1
CLASSIFICATION OF OCCUPANCY:	R
OCCUPANT LOAD:	--
MINIMUM TYPE OF CONSTRUCTION:	TYPE VB
HEIGHT OF BUILDING:	34'-6"±
NUMBER OF STORIES:	1 ELEVATED
TOTAL UNDER BEAM:	1,296 SQ. FT.

FLOOD ZONE (FIRM):	"VE-21"
FEMA MAP#:	28047C0333G
L.H.M.:	23'-8" A.S.L.

	SETBACKS		FIRE RATINGS	%OPEN
	REQUIRED	PROVIDED		
FRONT	25'	EXCEEDS	N/A	N/A
REAR	15'	EXCEEDS	N/A	N/A
SIDE	8'	--	N/A	N/A
CORNER	--	--	N/A	N/A

INDEX OF DRAWINGS

SHEET #	DESCRIPTION
T1.....	TITLE SHEET
C1.....	SITE PLAN
S1.....	FOUNDATION & FRAMING PLAN
S2.....	FOUNDATION & FRAMING DETAILS
B1.....	GROUND, MAIN FLOOR & ROOF PLAN
B2.....	LOUVER WALL DETAIL & ELEVATIONS
B3.....	TYPICAL WALL & ELEVATIONS
E1.....	GROUND & MAIN ELECTRICAL PLANS



P D M
PARKER DESIGN & MANAGEMENT
 DESIGN, CAD DRAWING, ESTIMATING...
 8195C WOOLMARKET ROAD
 BILOXI MS, 39532
 OFFICE: 908-686-7133
 MOBILE: 908-686-7133

A NEW RESIDENCE FOR:
TIM AND DEBRA NORTON
419 SANDY HOOK DRIVE
PASS CHRISTIAN, MS 39571

TITLE SHEET


DATE:	03/20/2023
REVISION DATE:	
DRAWN BY:	COLLIER SMITH
CHECK BY:	DON PARKER

SHEET
T1

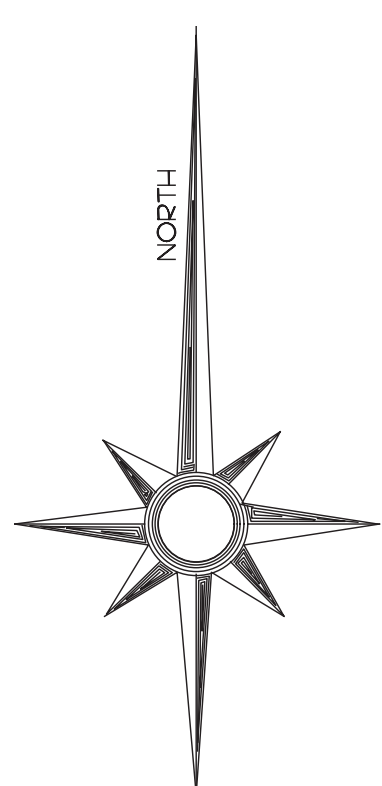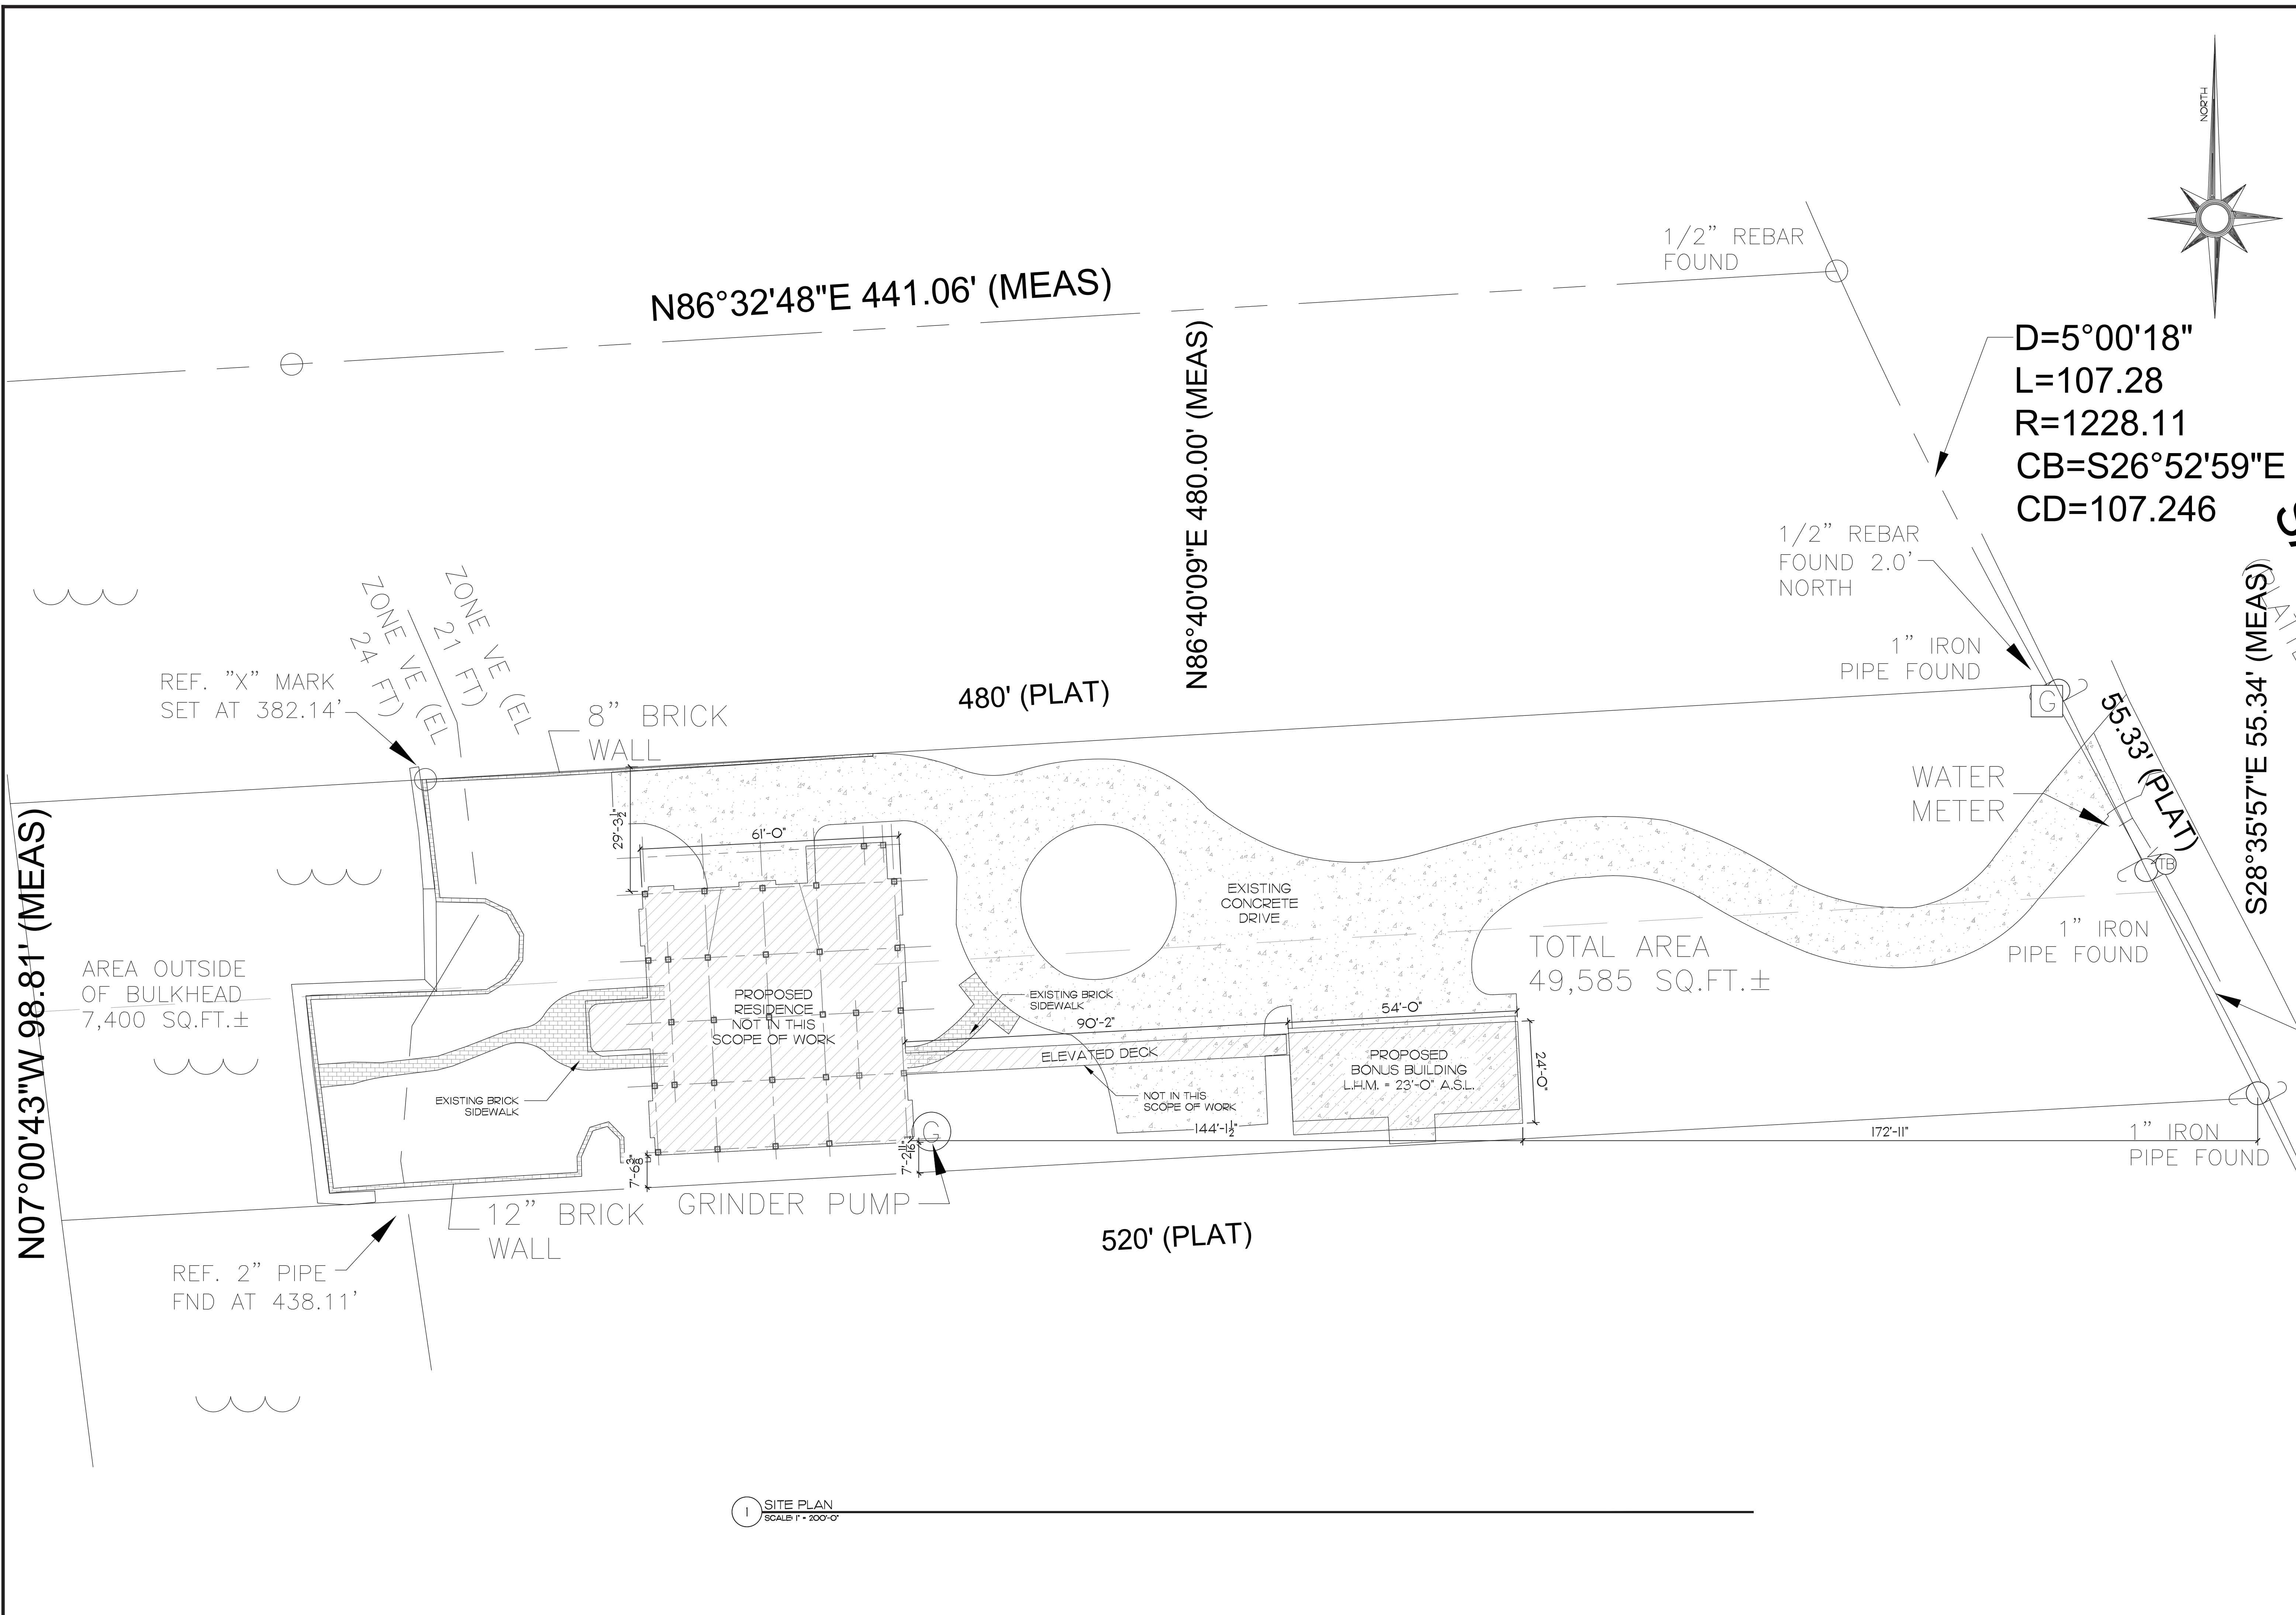

PDM
PARKER DESIGN & MANAGEMENT
 DESIGN CONSULTING, INC.
 8195C WOOLMARKET ROAD
 BILOXI MS, 39532

A NEW RESIDENCE FOR:
 TIM AND DEBRA NORTON
 419 SANDY HOOK DRIVE
 PASS CHRISTIAN, MS 39571




SHEET TITLE
**SITE PLAN W/
 EXISTING PILES**

DATE:	03/20/2023
REVISION DATE:	
DRAWN BY:	COLTLER SMITH
CHECK BY:	DON PARKER

SHEET
C







1 SITE PLAN
 SCALE: 1" = 200'-0"

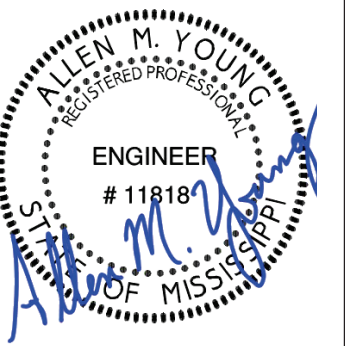

SHEET TITLE



DATE:	03/20/2023
REVISION DATE:	
DRAWN BY:	COLTLER SMITH
CHECK BY:	DON PARKER

SHEET
 S2

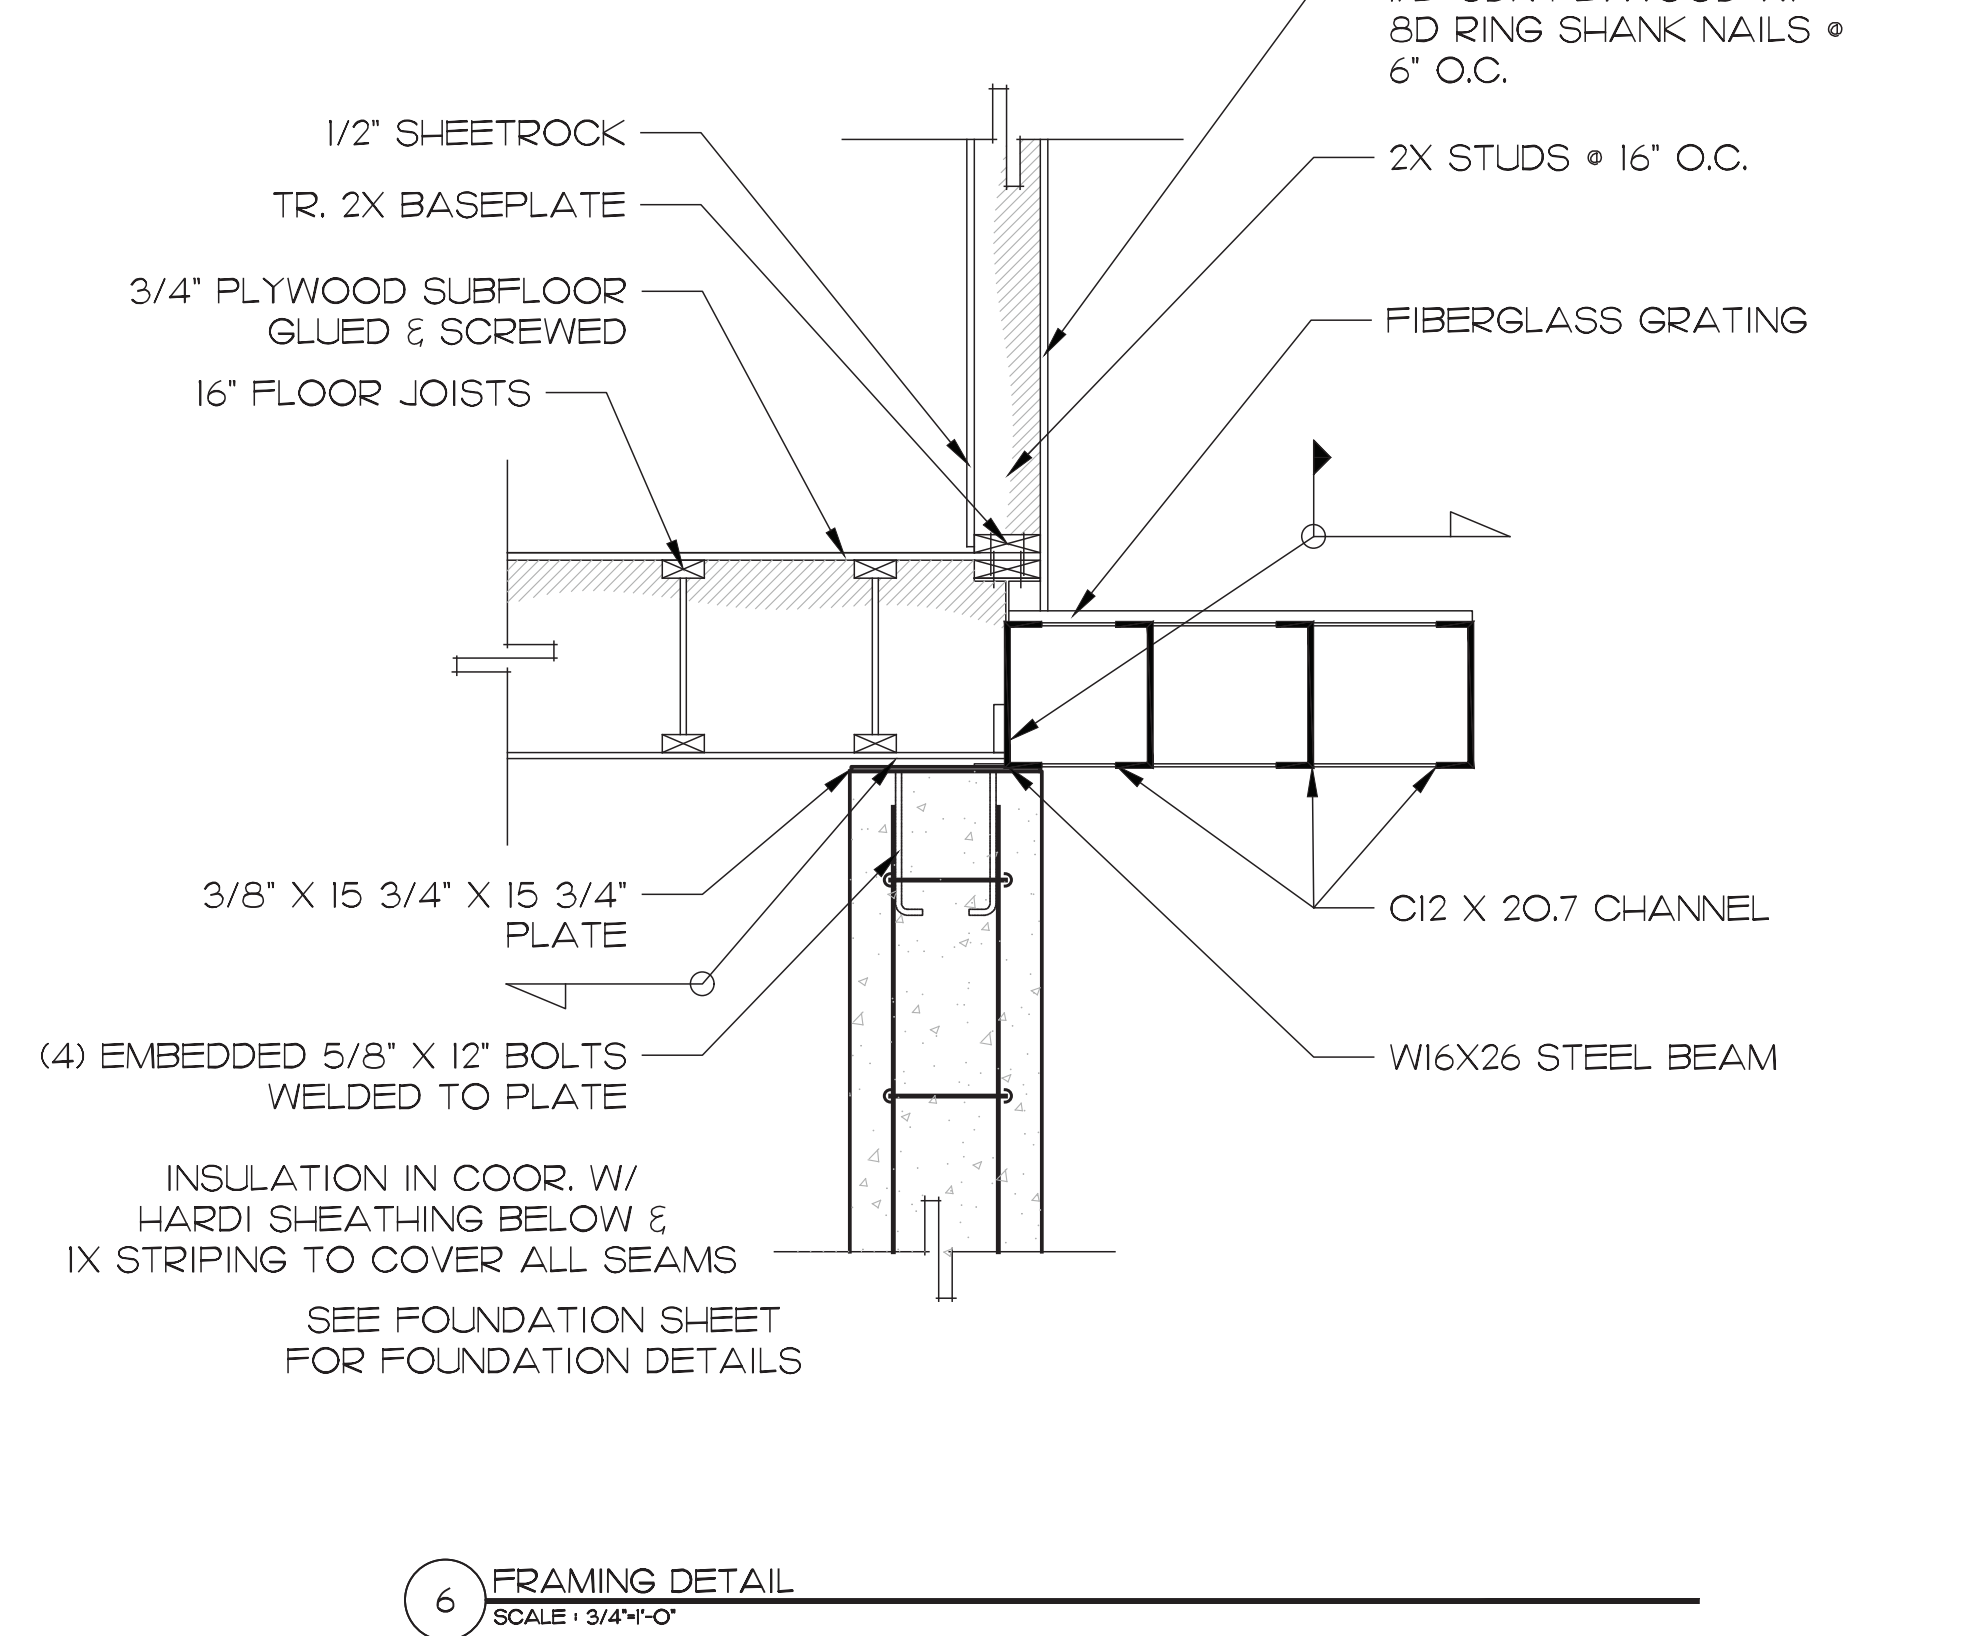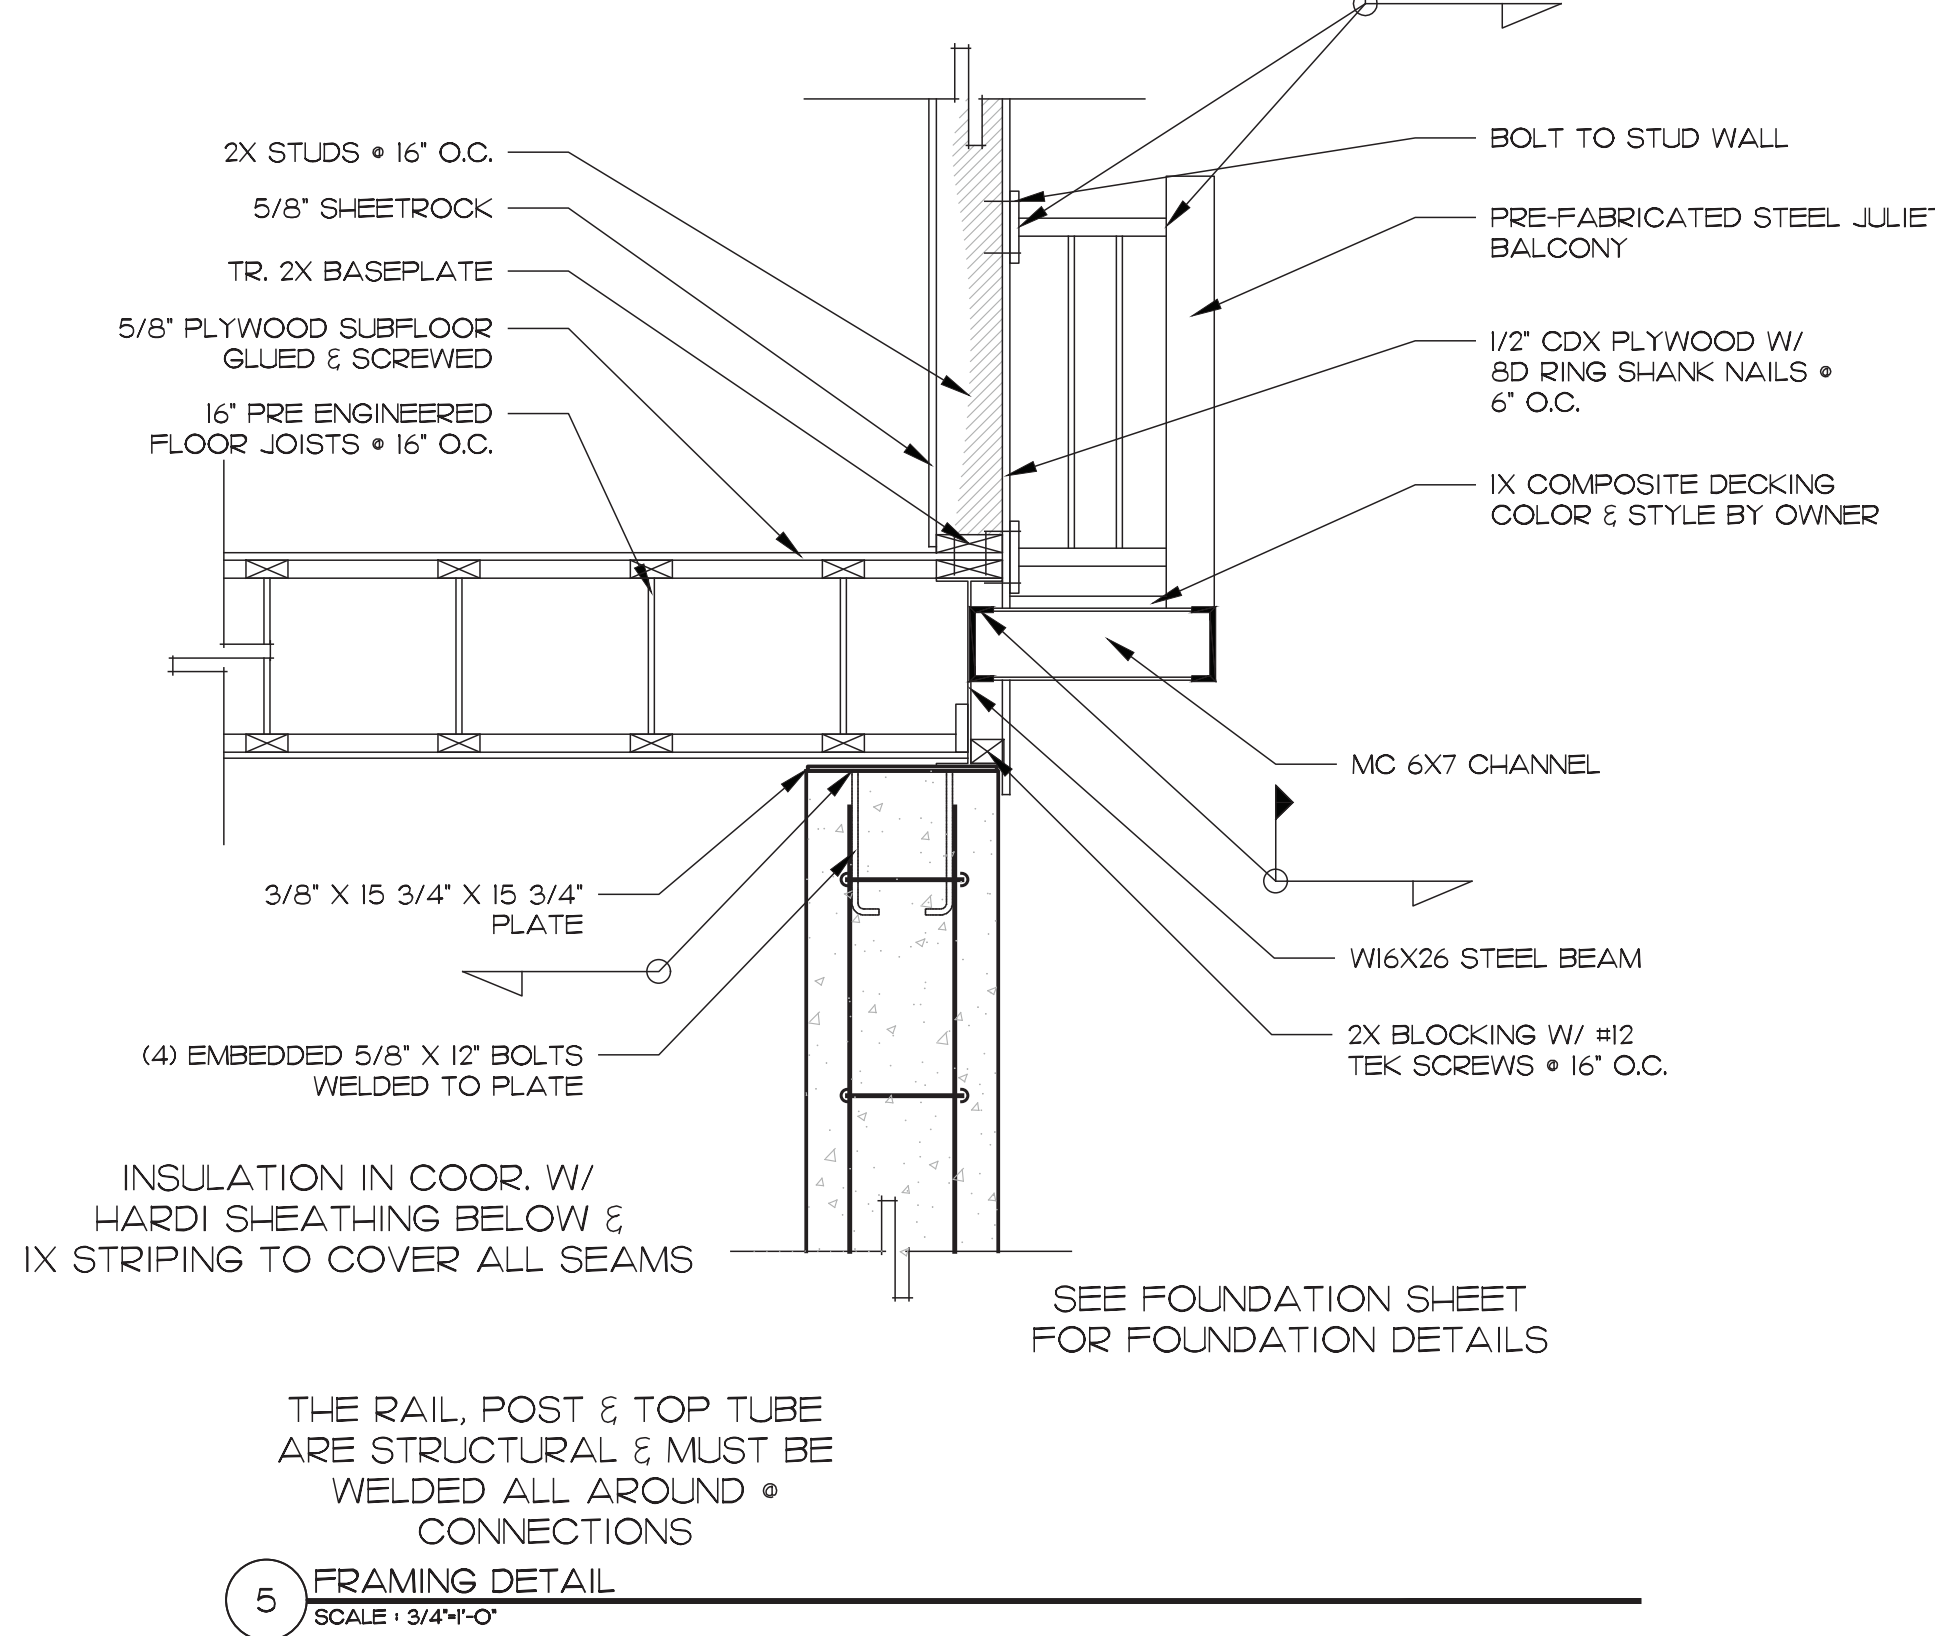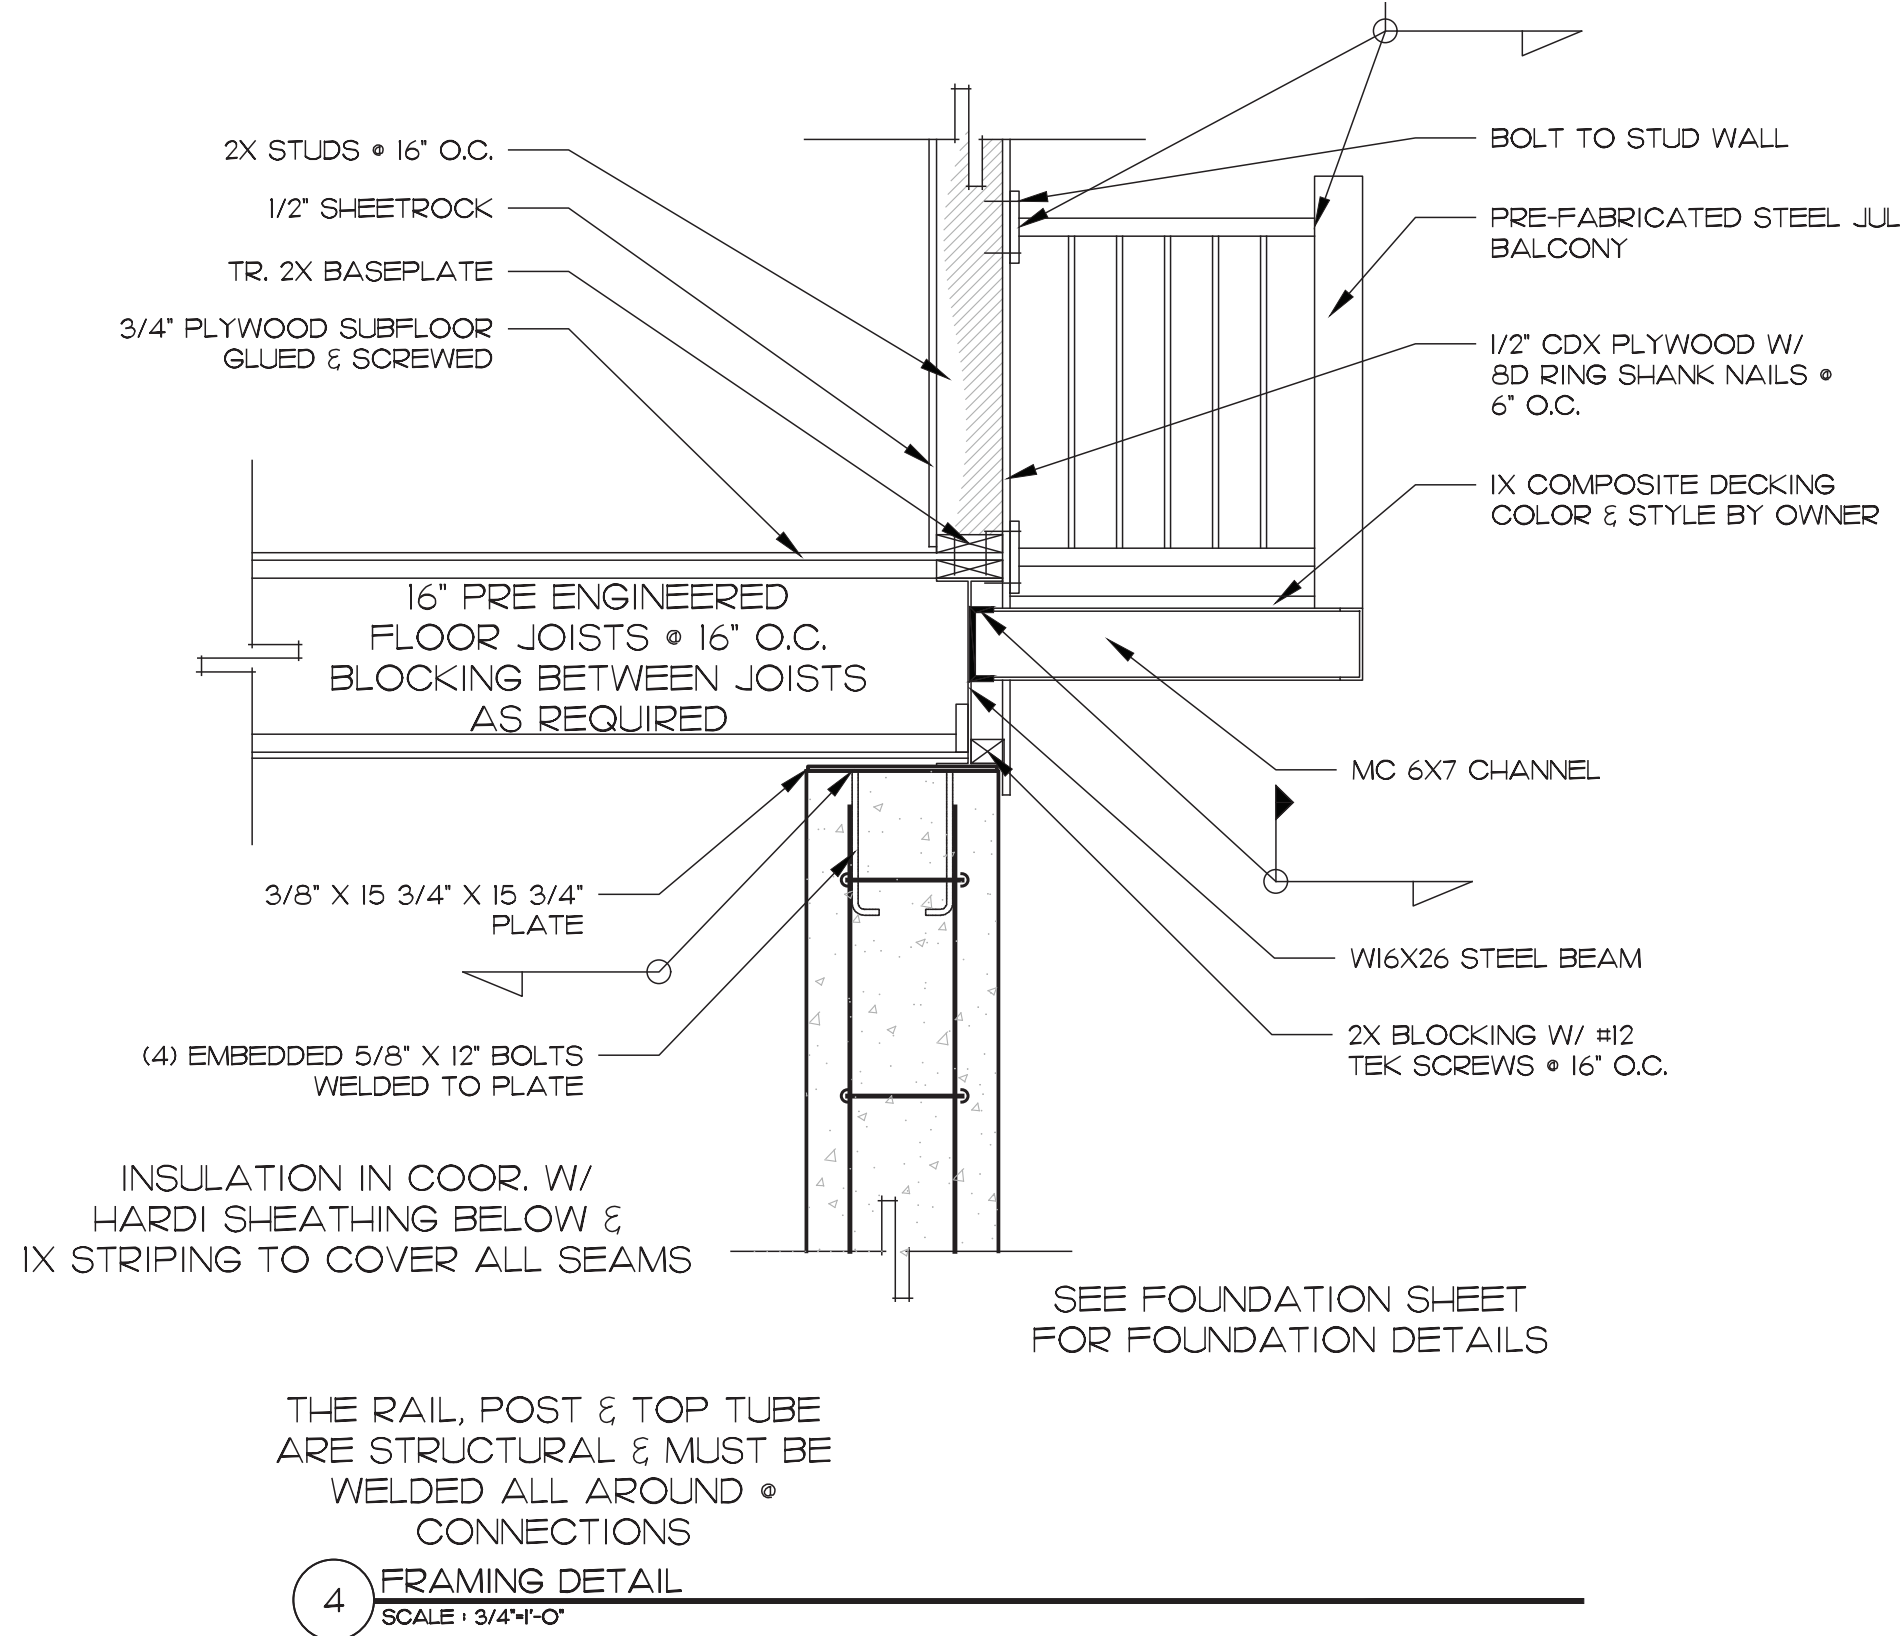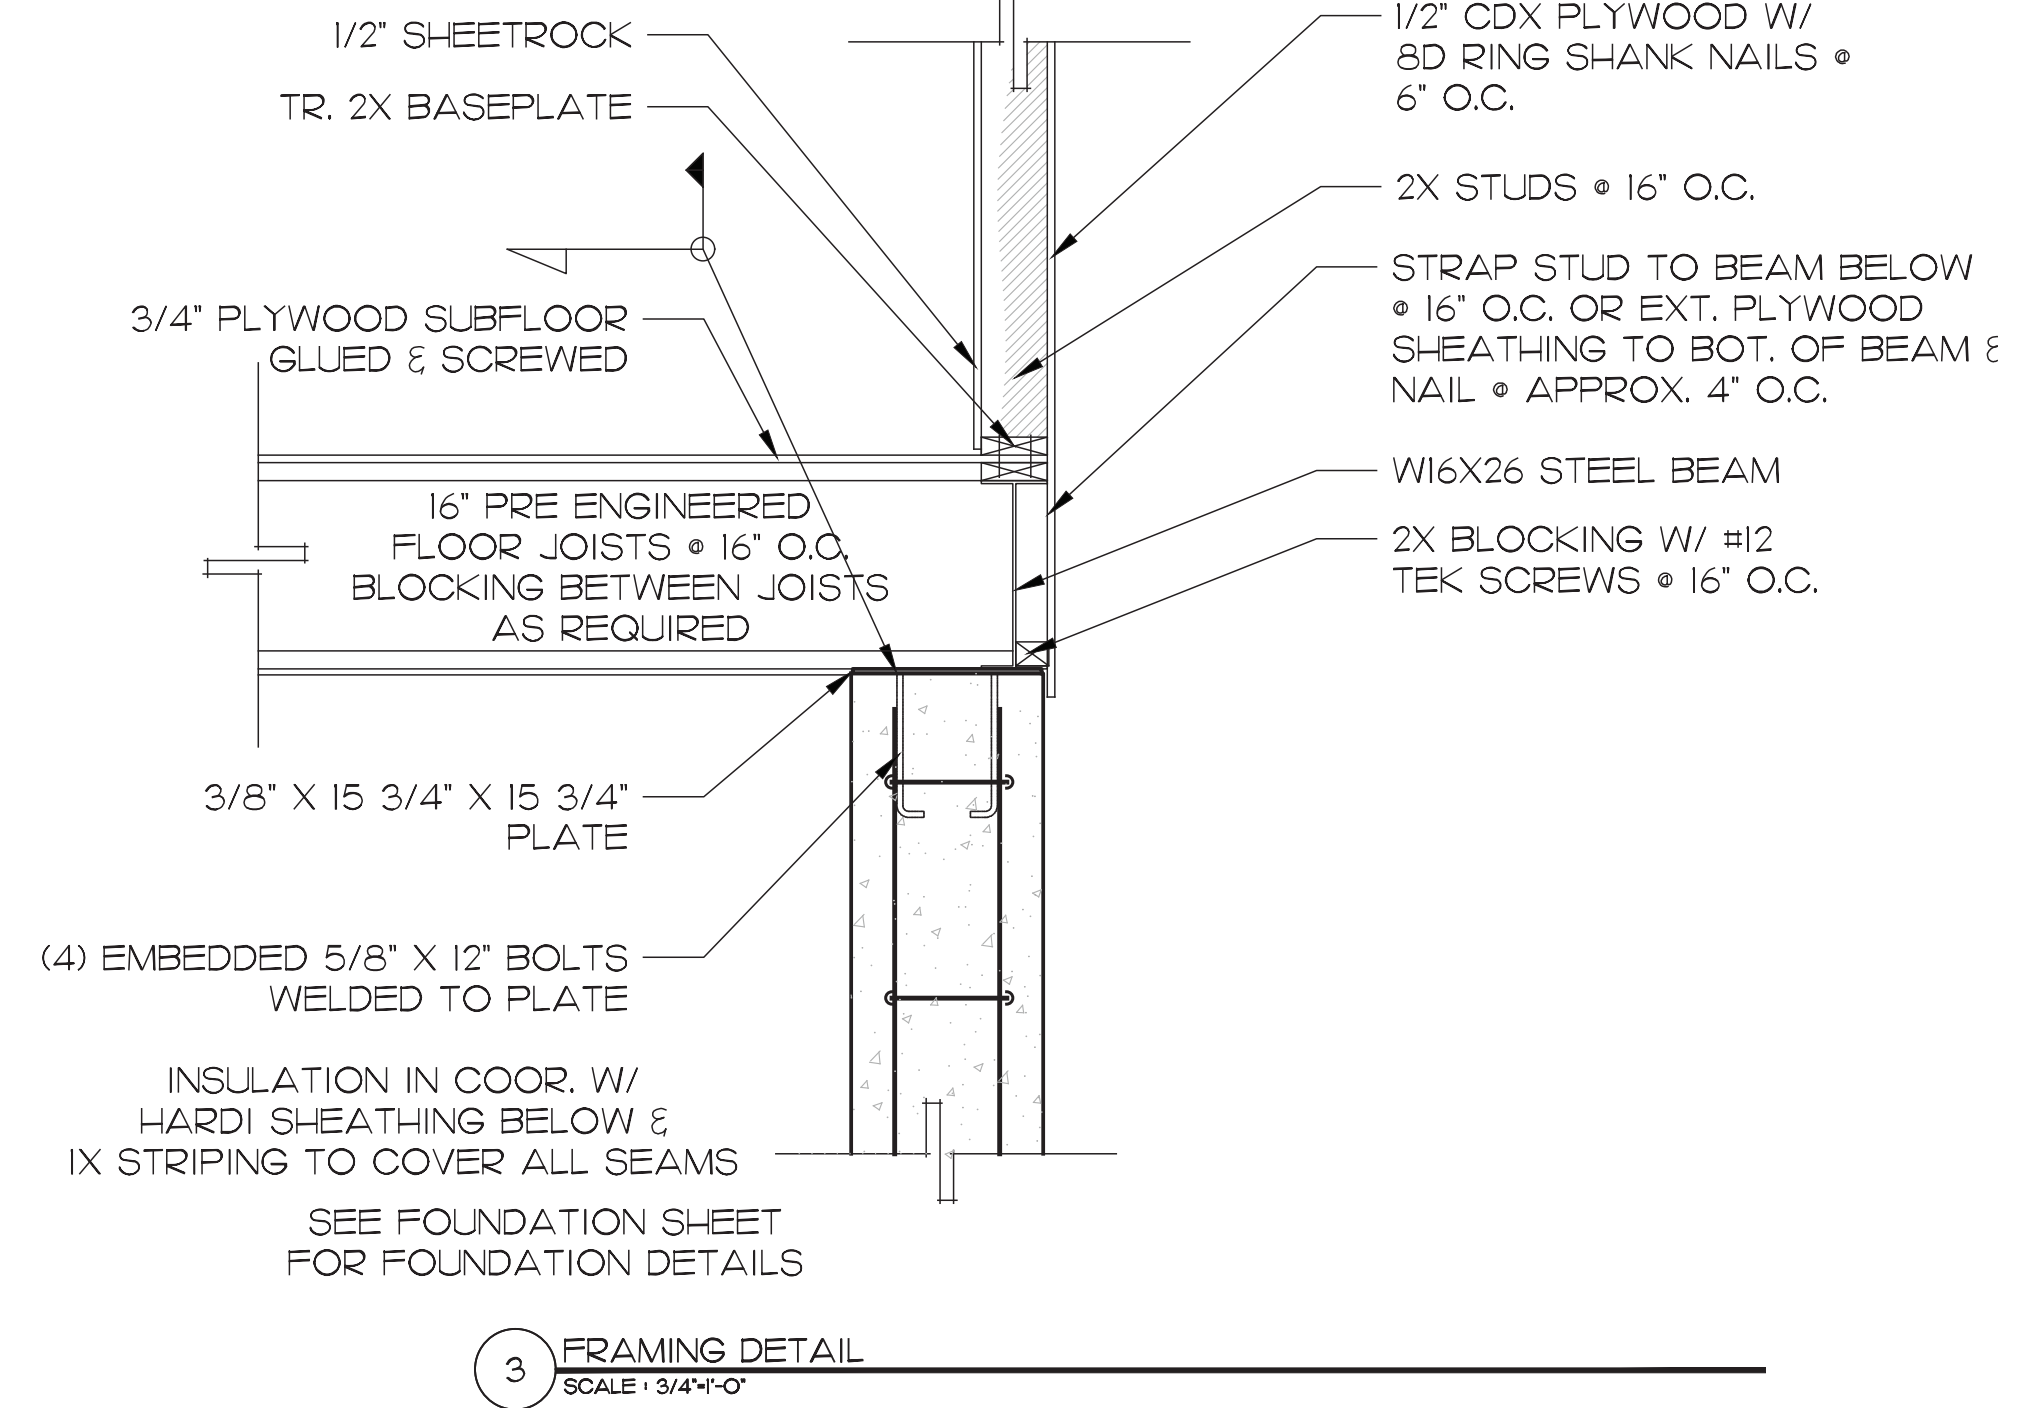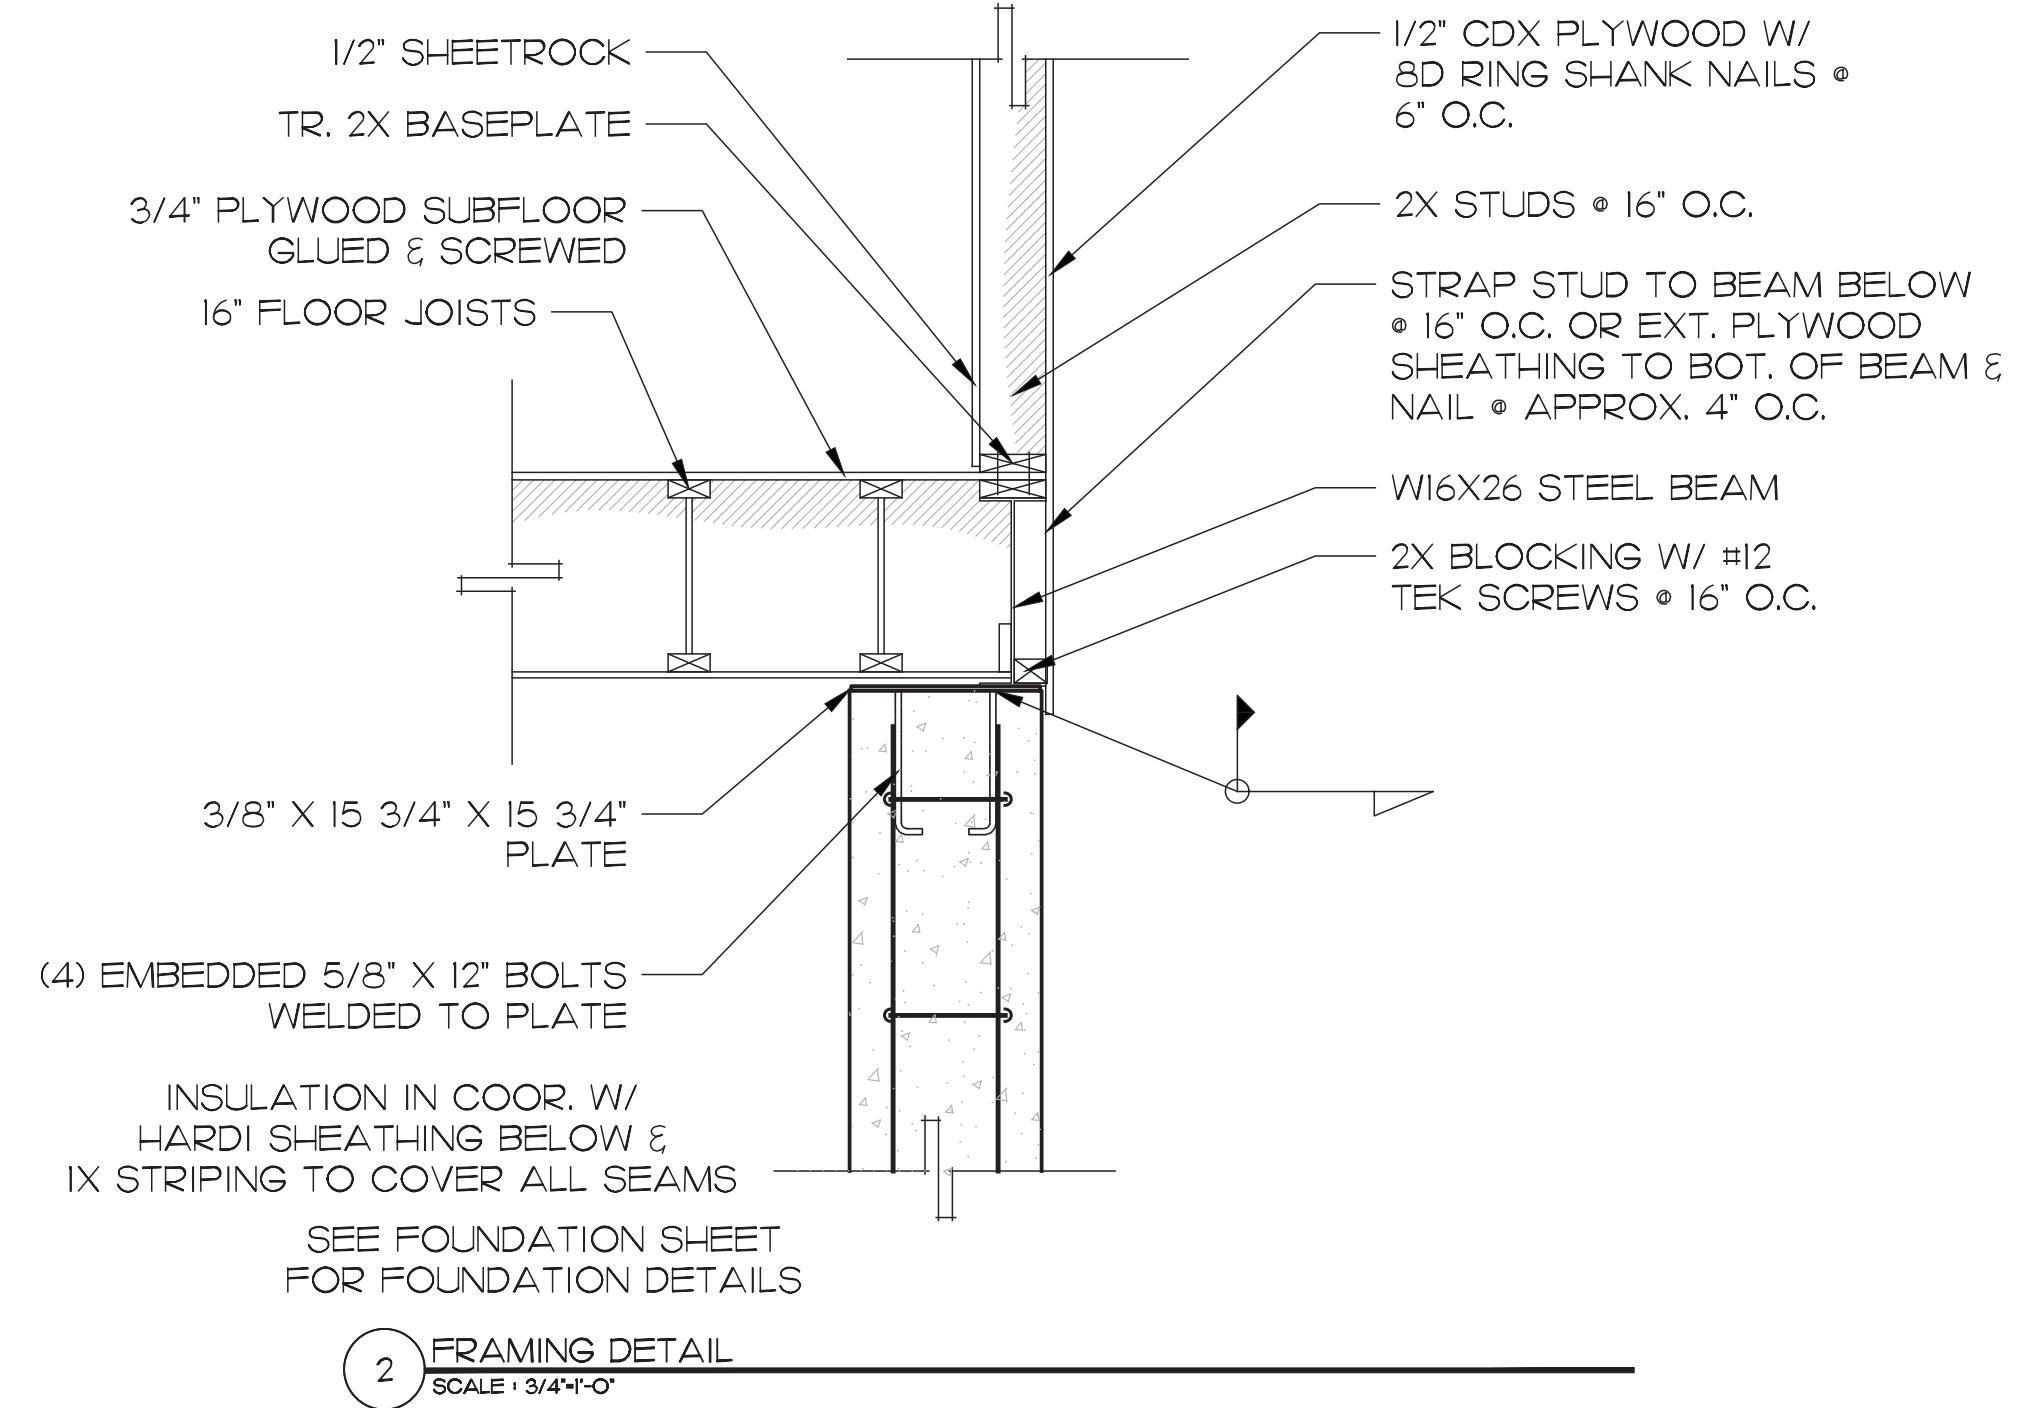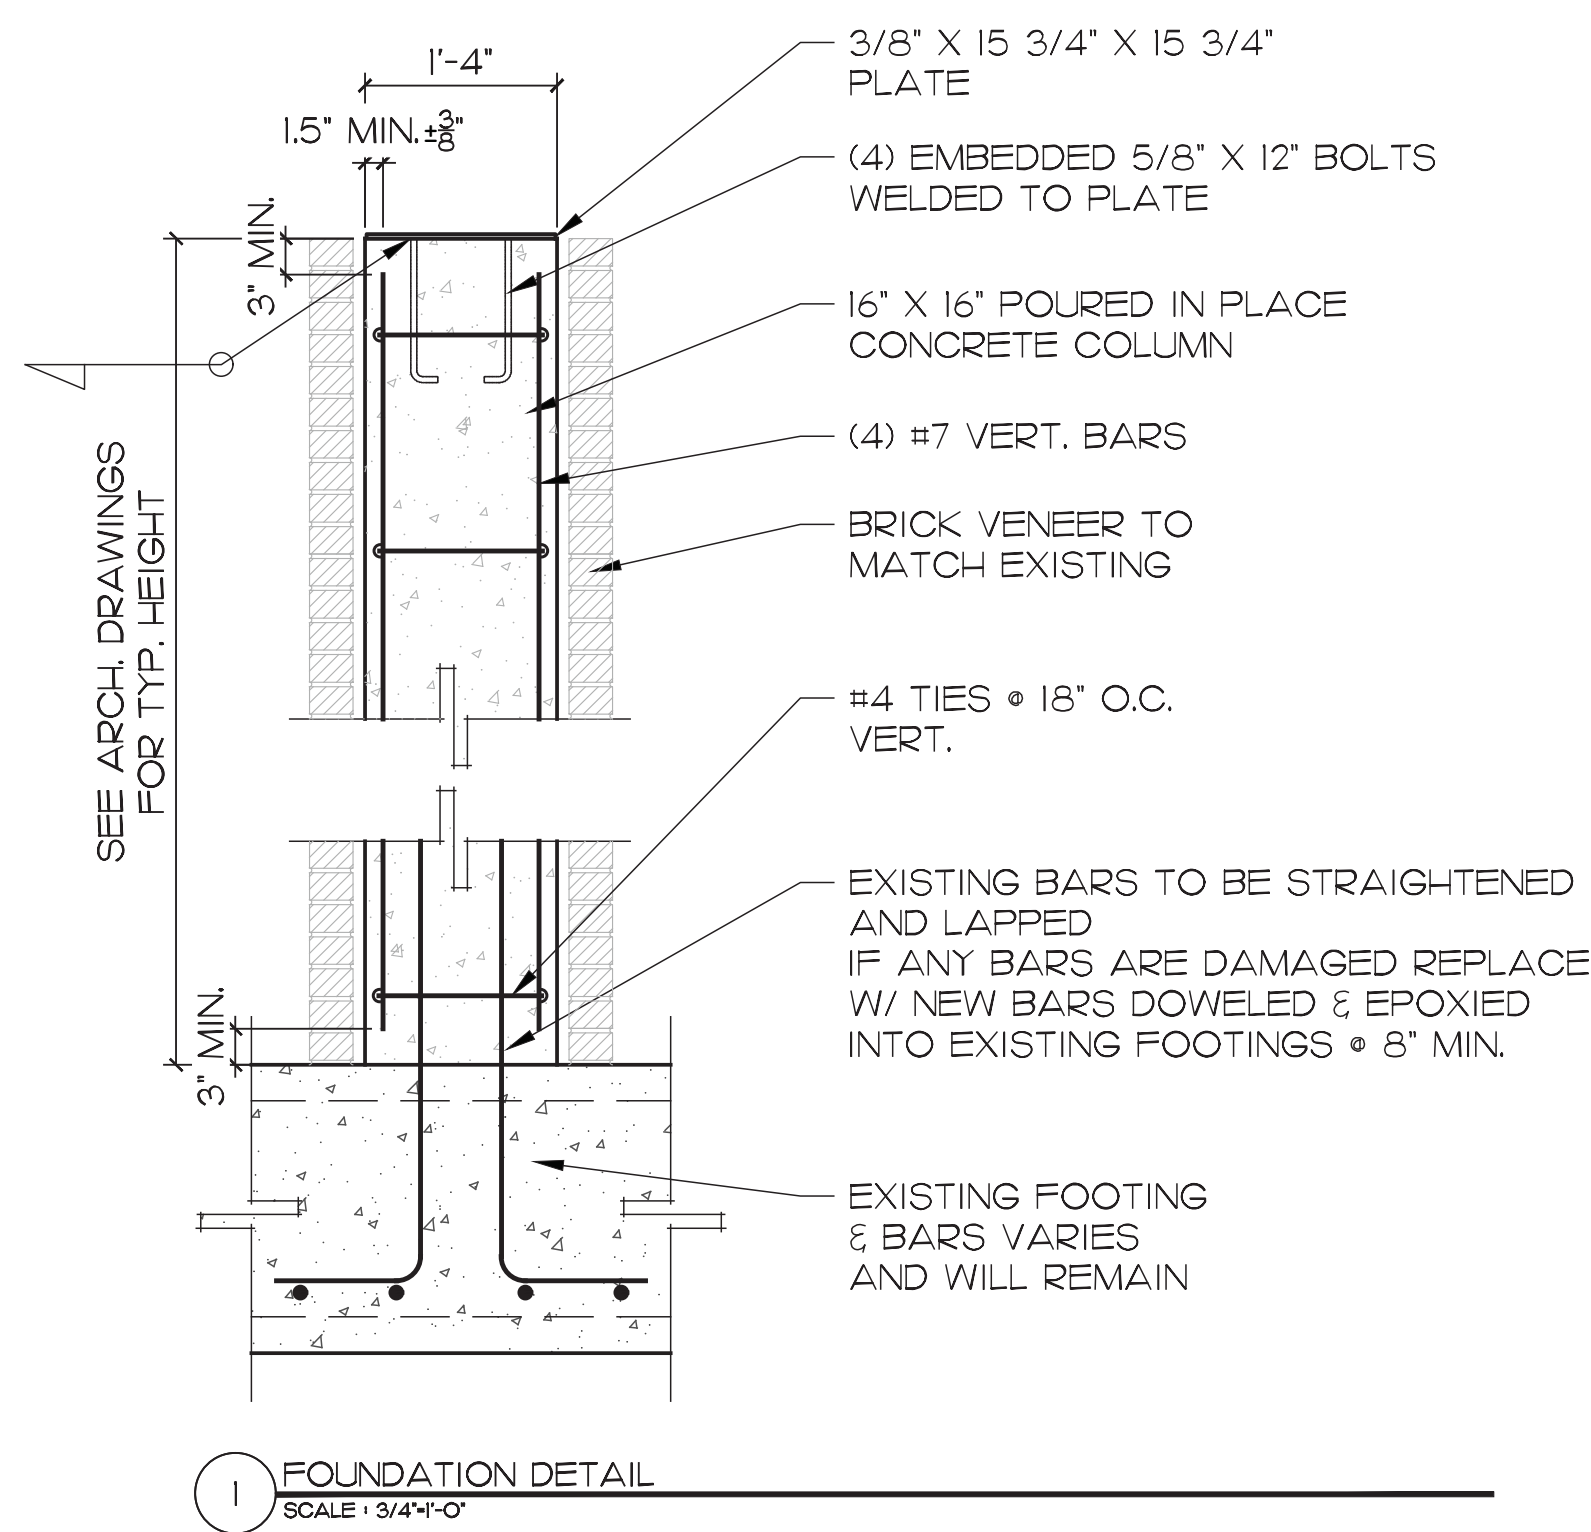


NOTES:


1. FINISHES, APPLIANCES, WINDOWS, DOORS, ETC. PER OWNER AND CONTRACTOR
2. ALL DETAILS OF CONSTRUCTION SHALL BE DONE IN ACCORDANCE WITH THE INTERNATIONAL RESIDENTIAL CODE, CURRENT EDITION, AND ALL APPLICABLE CODES THEREIN.
3. ELECTRICAL DESIGN AND INSTALLATION TO BE BY A MISSISSIPPI LICENSED ELECTRICAL CONTRACTOR AND TO BE DONE IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE CURRENT EDITION.
4. ELECTRICAL FIXTURES, SWITCHES, OUTLETS ETC. ARE SHOWN FOR GENERAL LOCATION ONLY. MOUNTING HEIGHTS AND EXACT LOCATIONS PER OWNER AND CONTRACTOR.
5. HVAC DESIGN AND INSTALLATION TO BE BY A MISSISSIPPI LICENSED MECHANICAL CONTRACTOR AND TO BE IN ACCORDANCE WITH THE INTERNATIONAL MECHANICAL CODE, CURRENT EDITION, AND ALL REFERENCED APPLICABLE CODES THEREIN.
6. PLUMBING DESIGN AND INSTALLATION IS TO BE BY A MISSISSIPPI LICENSED PLUMBING CONTRACTOR AND TO BE DONE IN ACCORDANCE WITH THE INTERNATIONAL PLUMBING CODE, CURRENT EDITION, AND ALL REFERENCED APPLICABLE CODES THEREIN.
7. CONTRACTOR SHALL COMPLY WITH THE REQUIREMENTS OF THE INTERNATIONAL RESIDENTIAL CODE, CURRENT EDITION, THE LIFE SAFETY CODE LATEST EDITION, AND ALL APPLICABLE COUNTY ORDINANCES.
8. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND REPORT ANY DISCREPANCIES OR VARIANCES TO THE DESIGNER PRIOR TO COMMENCEMENT OF CONSTRUCTION OR WITHIN A TIMELY MANNER DURING CONSTRUCTION.
9. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF ANY FOUND DIFFERENCES BETWEEN THE SITE DRAWINGS AND THE ACTUAL FIELD VERIFIED CONDITION THAT WOULD AFFECT THE QUALITY OF AESTHETIC NATURE OF THE WORK.
10. DEVIATIONS FROM THE DRAWINGS NOT APPROVED BY THE DESIGNER PRIOR TO PERFORMANCE OF SAID CHANGE, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, INCLUDING ANY AND ALL RESULTING EFFECTS TO OTHER TRADES WITHIN OR ABOUT THE CONSTRUCTION OF THE BUILDING.
11. CONTRACTOR SHALL VERIFY WITH THE OWNER, ALL DOORS AND WINDOWS (MFR, TYPE, SIZE, LOCATION), PLUMBING AND ELECTRICAL FIXTURES AND EQUIPMENT (MFR, TYPE, SIZE, LOCATION AND MOUNTING HEIGHT), AIR CONDITIONING SUPPLY AIR AND RETURN AIR GRILLES AND DUCT LOCATIONS (MFR, TYPE, SIZE, LOCATION AND MOUNTING HEIGHT IF ON VERTICAL SURFACE), HARDWOOD TRIM AND FINISHES (COLOR, TEXTURE AND LOCATION) PRIOR TO INSTALLATION.
12. THIS STRUCTURE HAS BEEN DIMENSIONED AND PLACED ON THE PROPERTY BASED ON A SITE BOUNDARY SURVEY PROVIDED TO THE DESIGNER BY THE OWNER. THE DESIGNER MAKES NO GUARANTEES OF ITS ACCURACY AND VALIDITY. ANY DISCREPANCIES IN THE CORRECT LEGAL SIZE AND DIMENSIONS OF THIS PROPERTY AND THE INFORMATION RECEIVED FROM THE OWNER OF THIS PROPERTY SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND OWNER TO RESOLVE AND PROPERLY DETERMINE WHERE TO LEGALLY PLACE THE STRUCTURE ON SAID PROPERTY. THE DESIGNER SHALL BE NOTIFIED IN WRITING OF ANY DISCREPANCIES AND OR REVISIONS TO THESE CONTRACT DOCUMENTS.
13. COORDINATE PREFABRICATED BALCONIES W/ DOORS TO ENSURE DOOR CAN BE OPENED 180 DEGREES WITHOUT HITTING RAILS OR OTHER PARTS OF BALCONIES

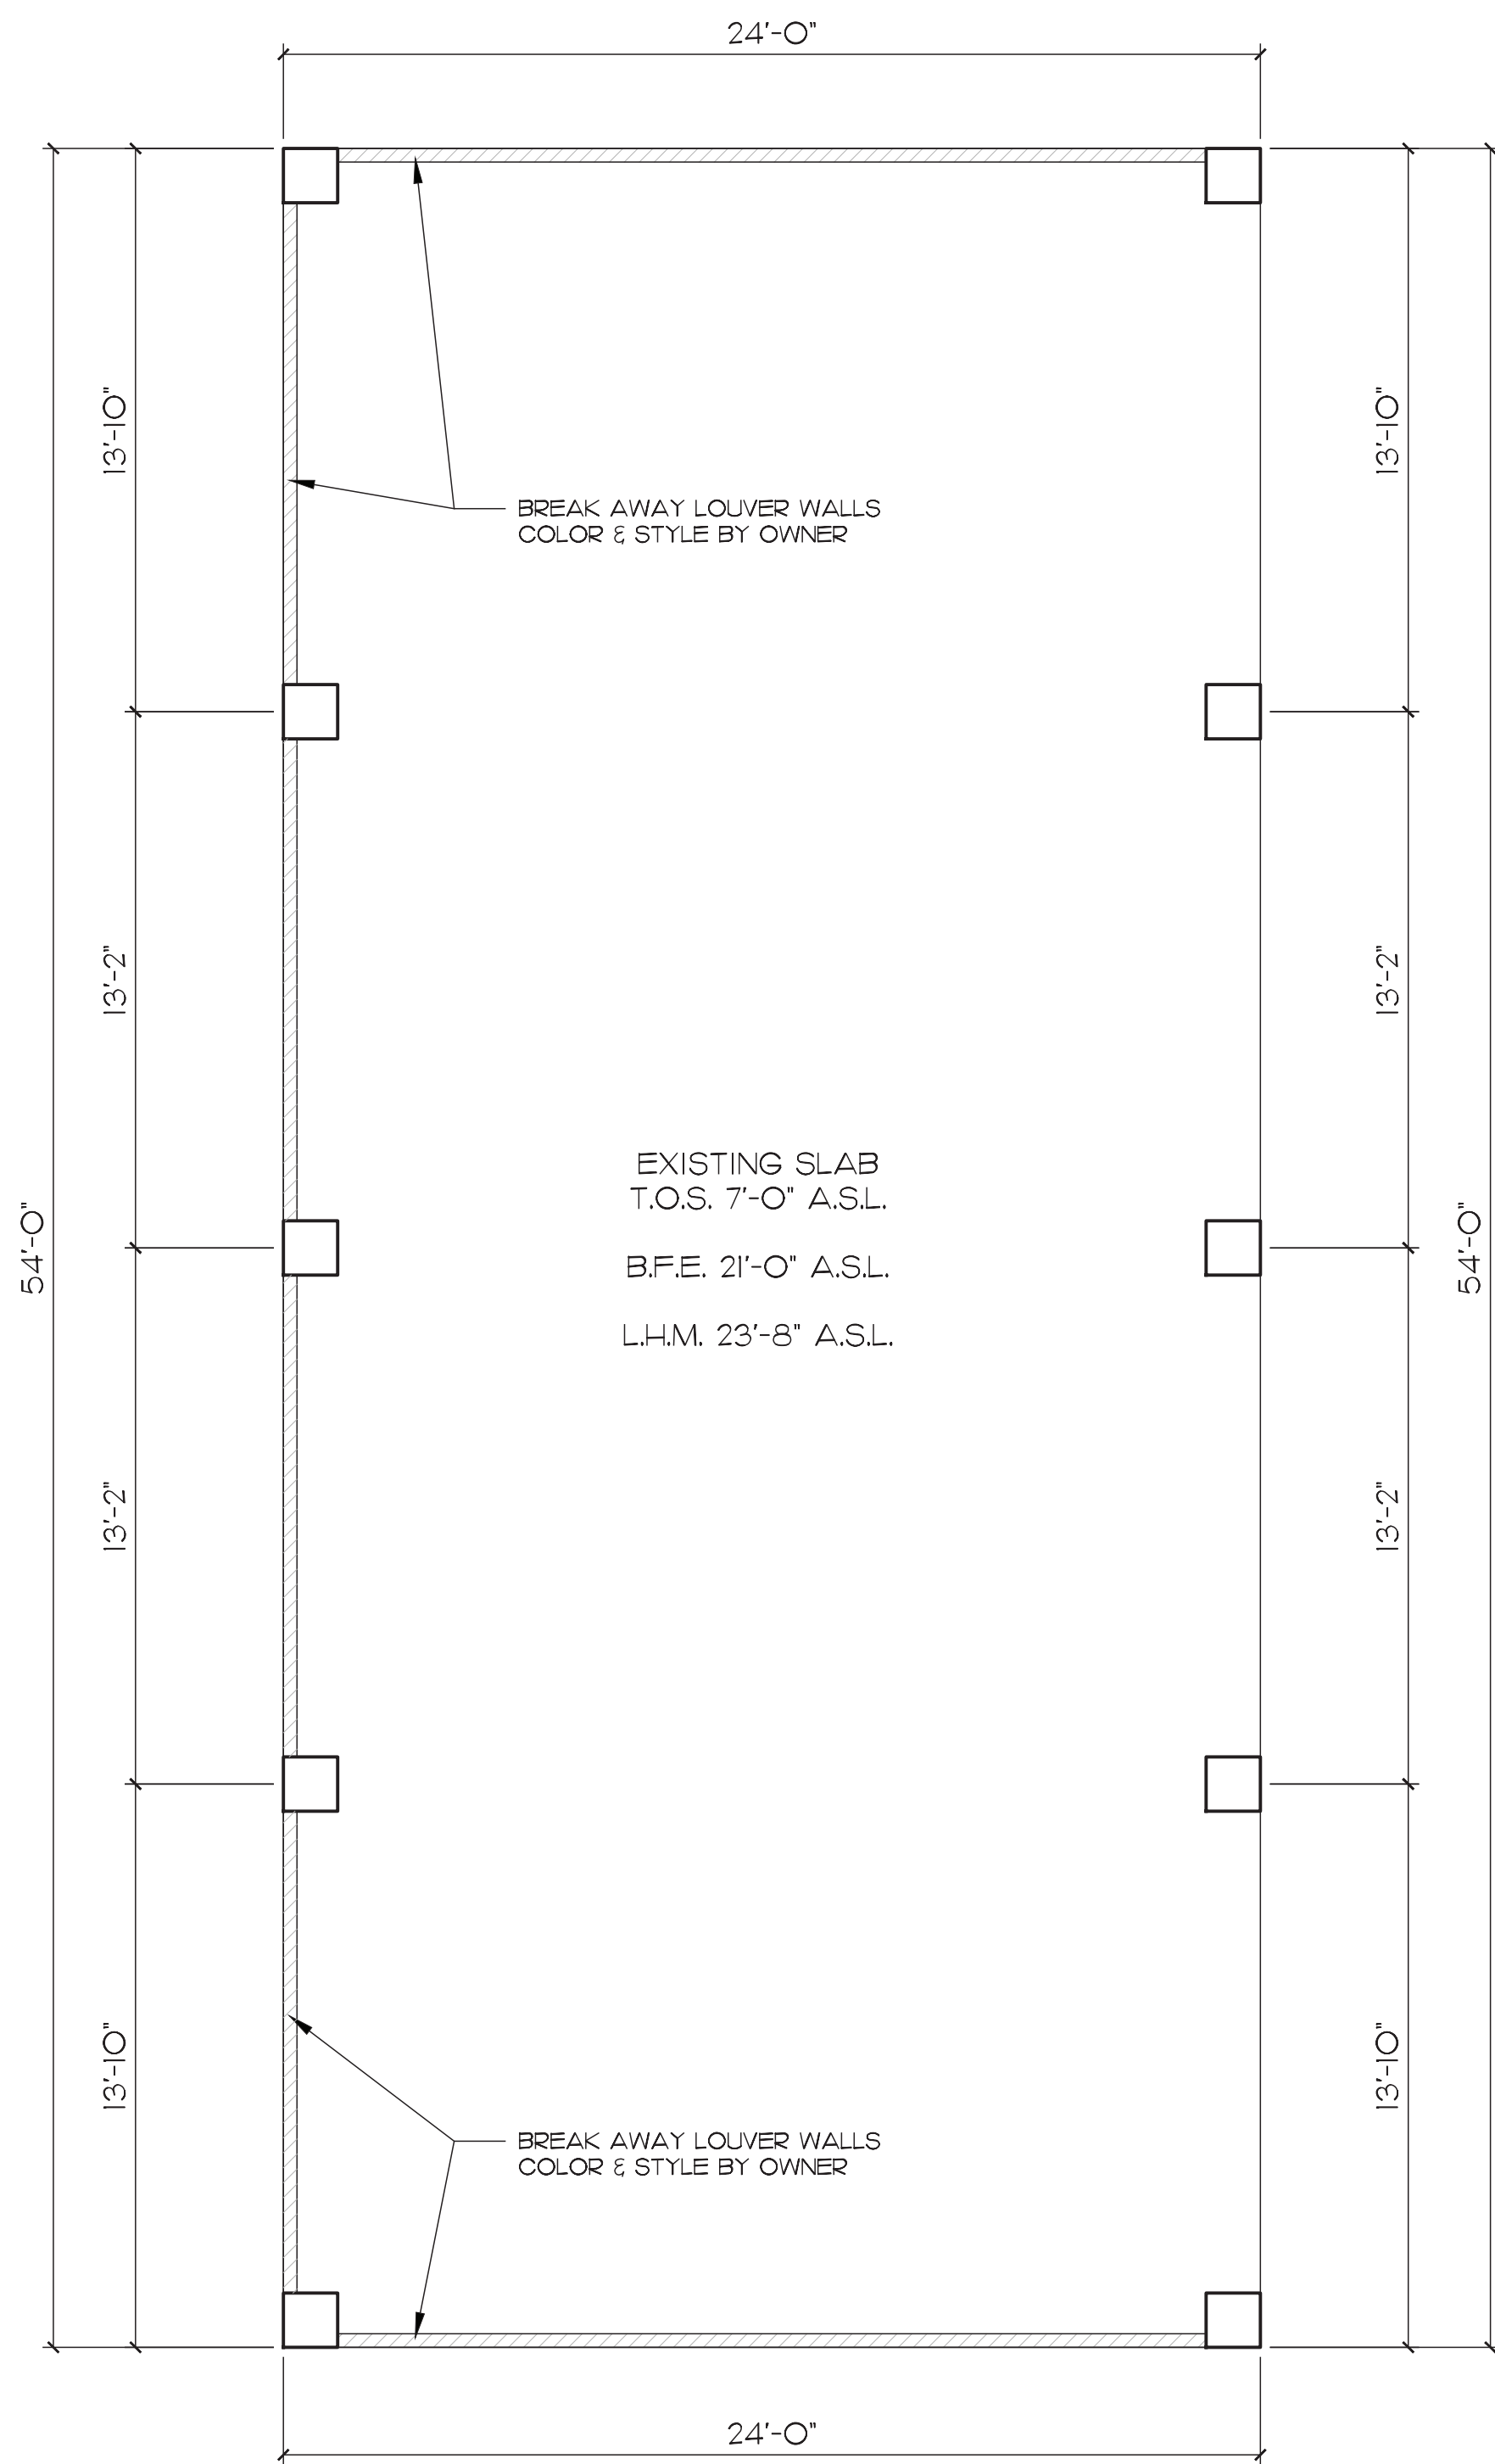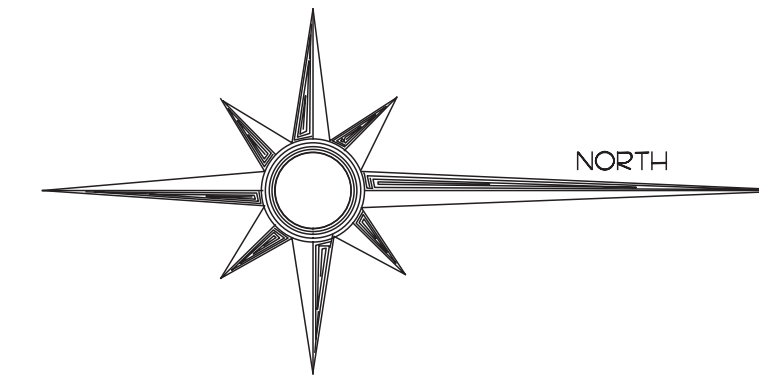

1 GROUND FLOOR PLAN
 SCALE: 1/4"=1'-0"



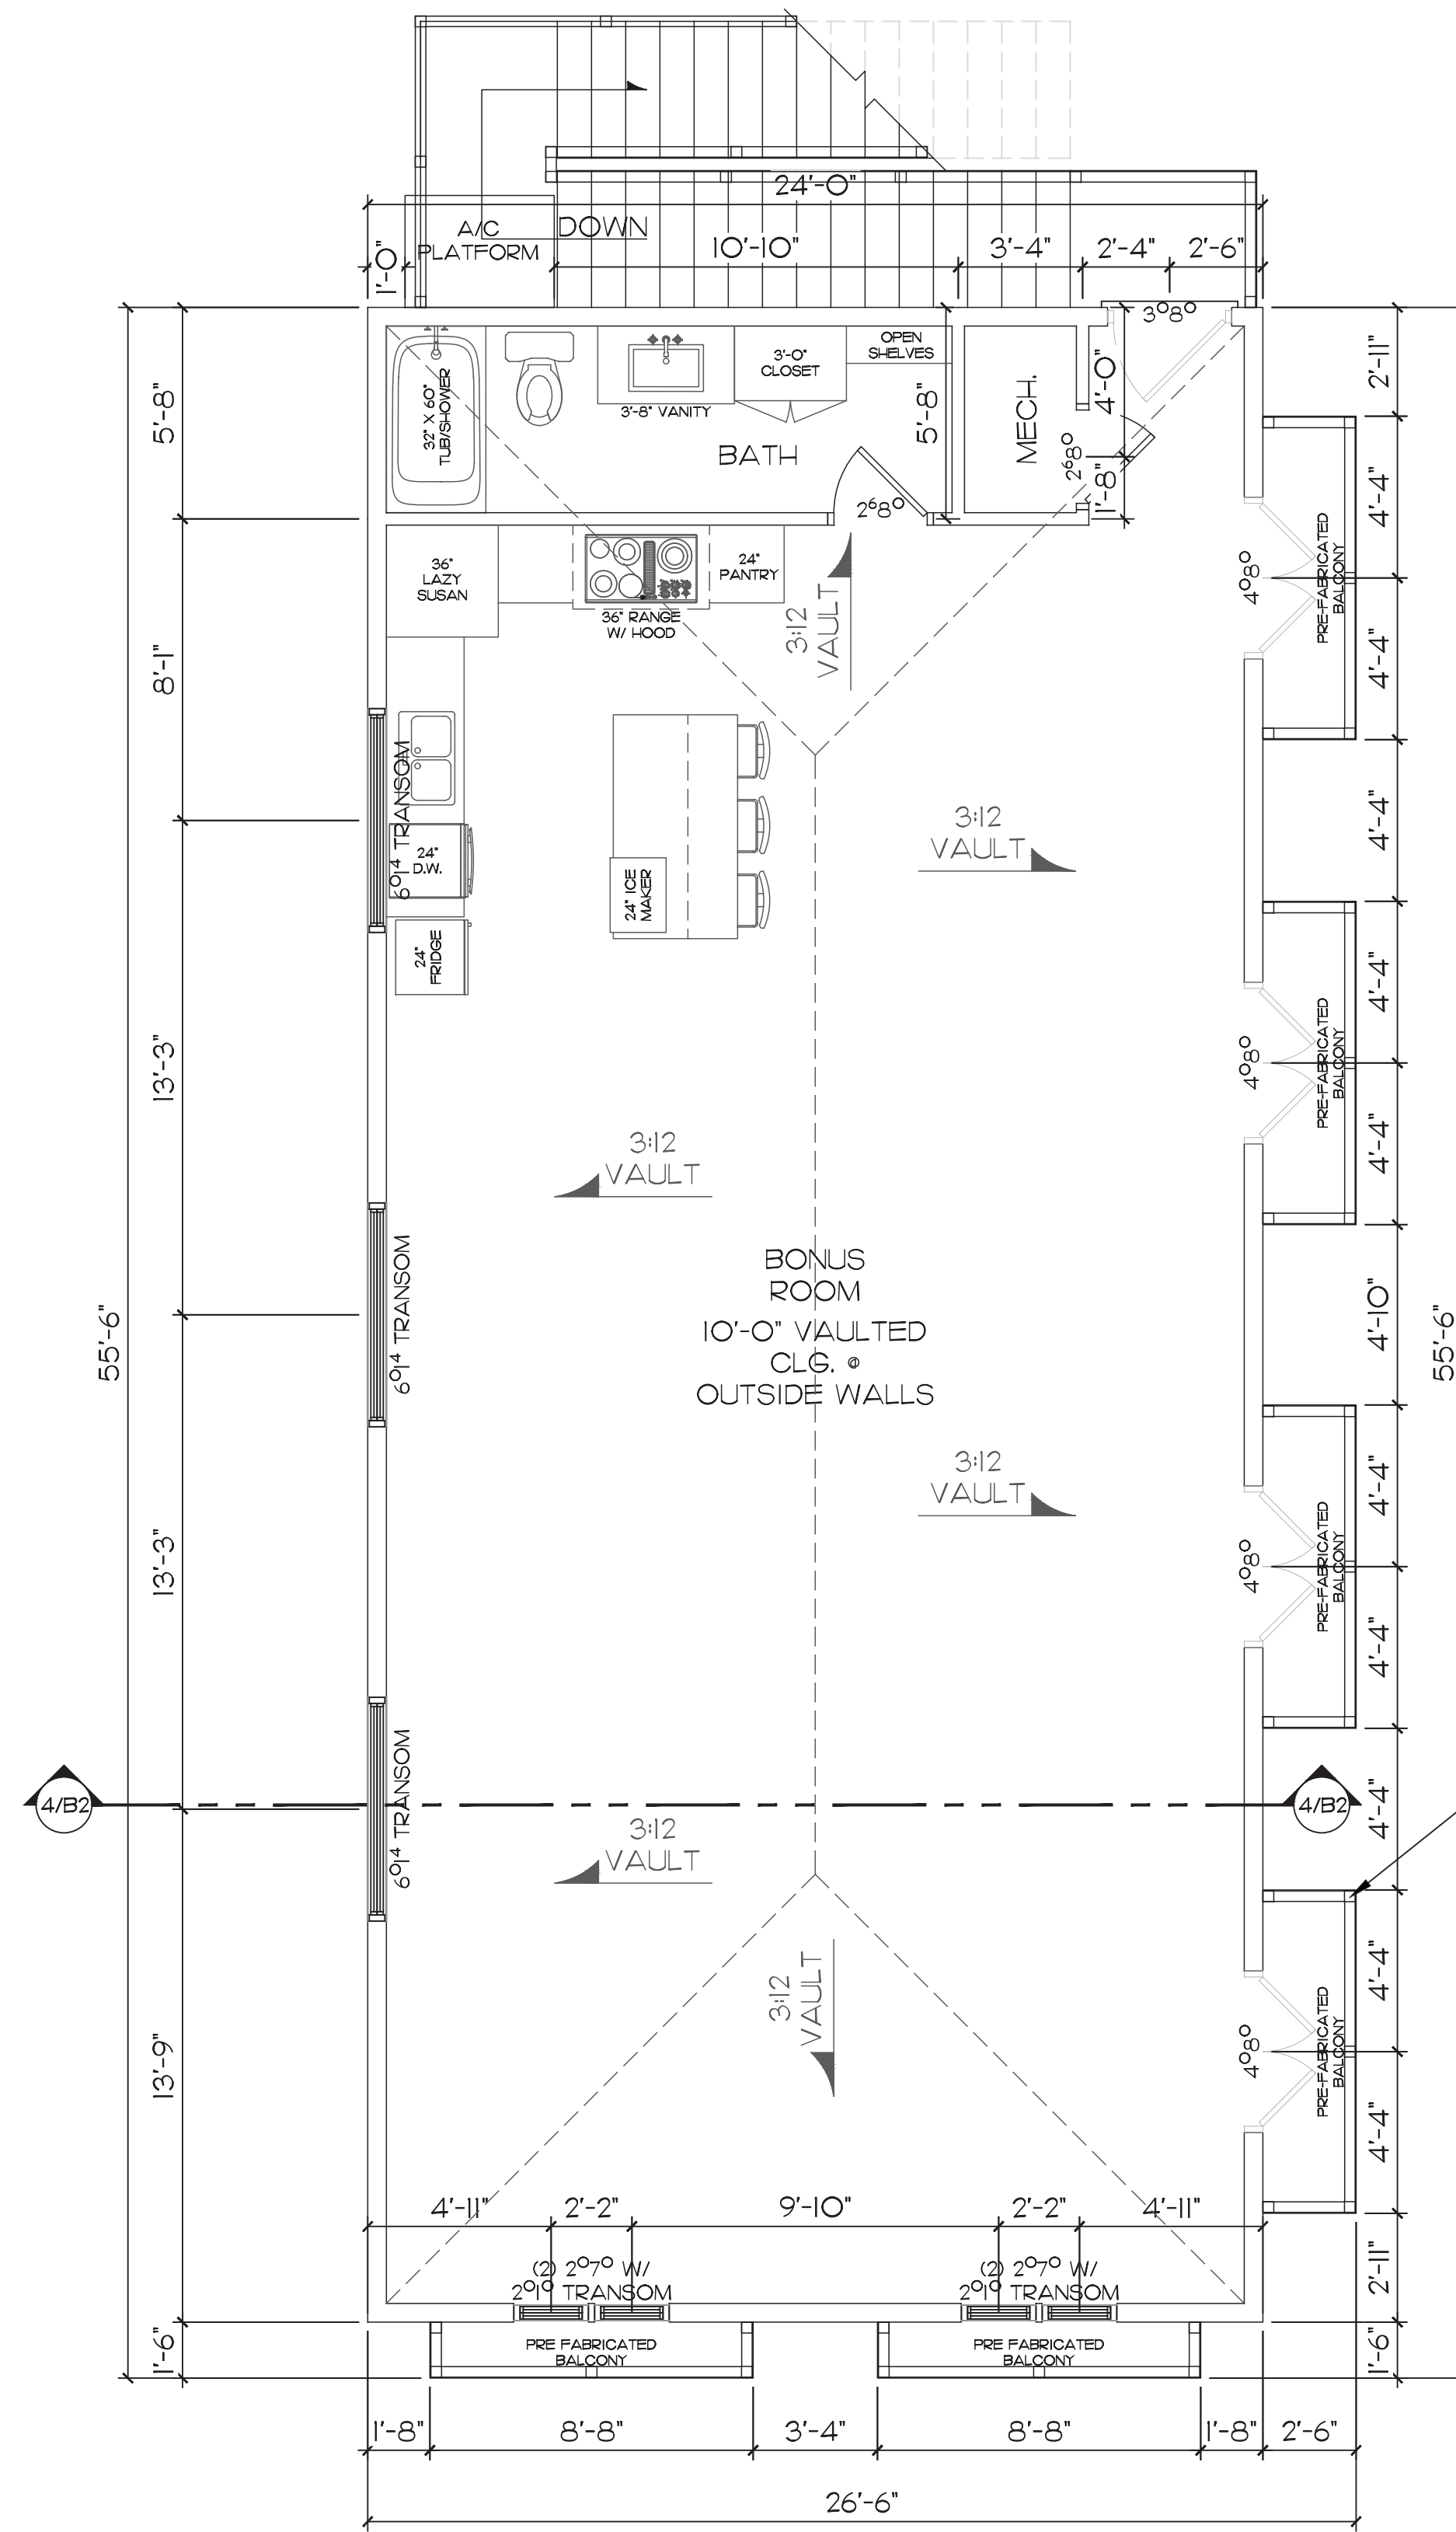


2 MAIN FLOOR PLAN
 SCALE: 1/4"=1'-0"

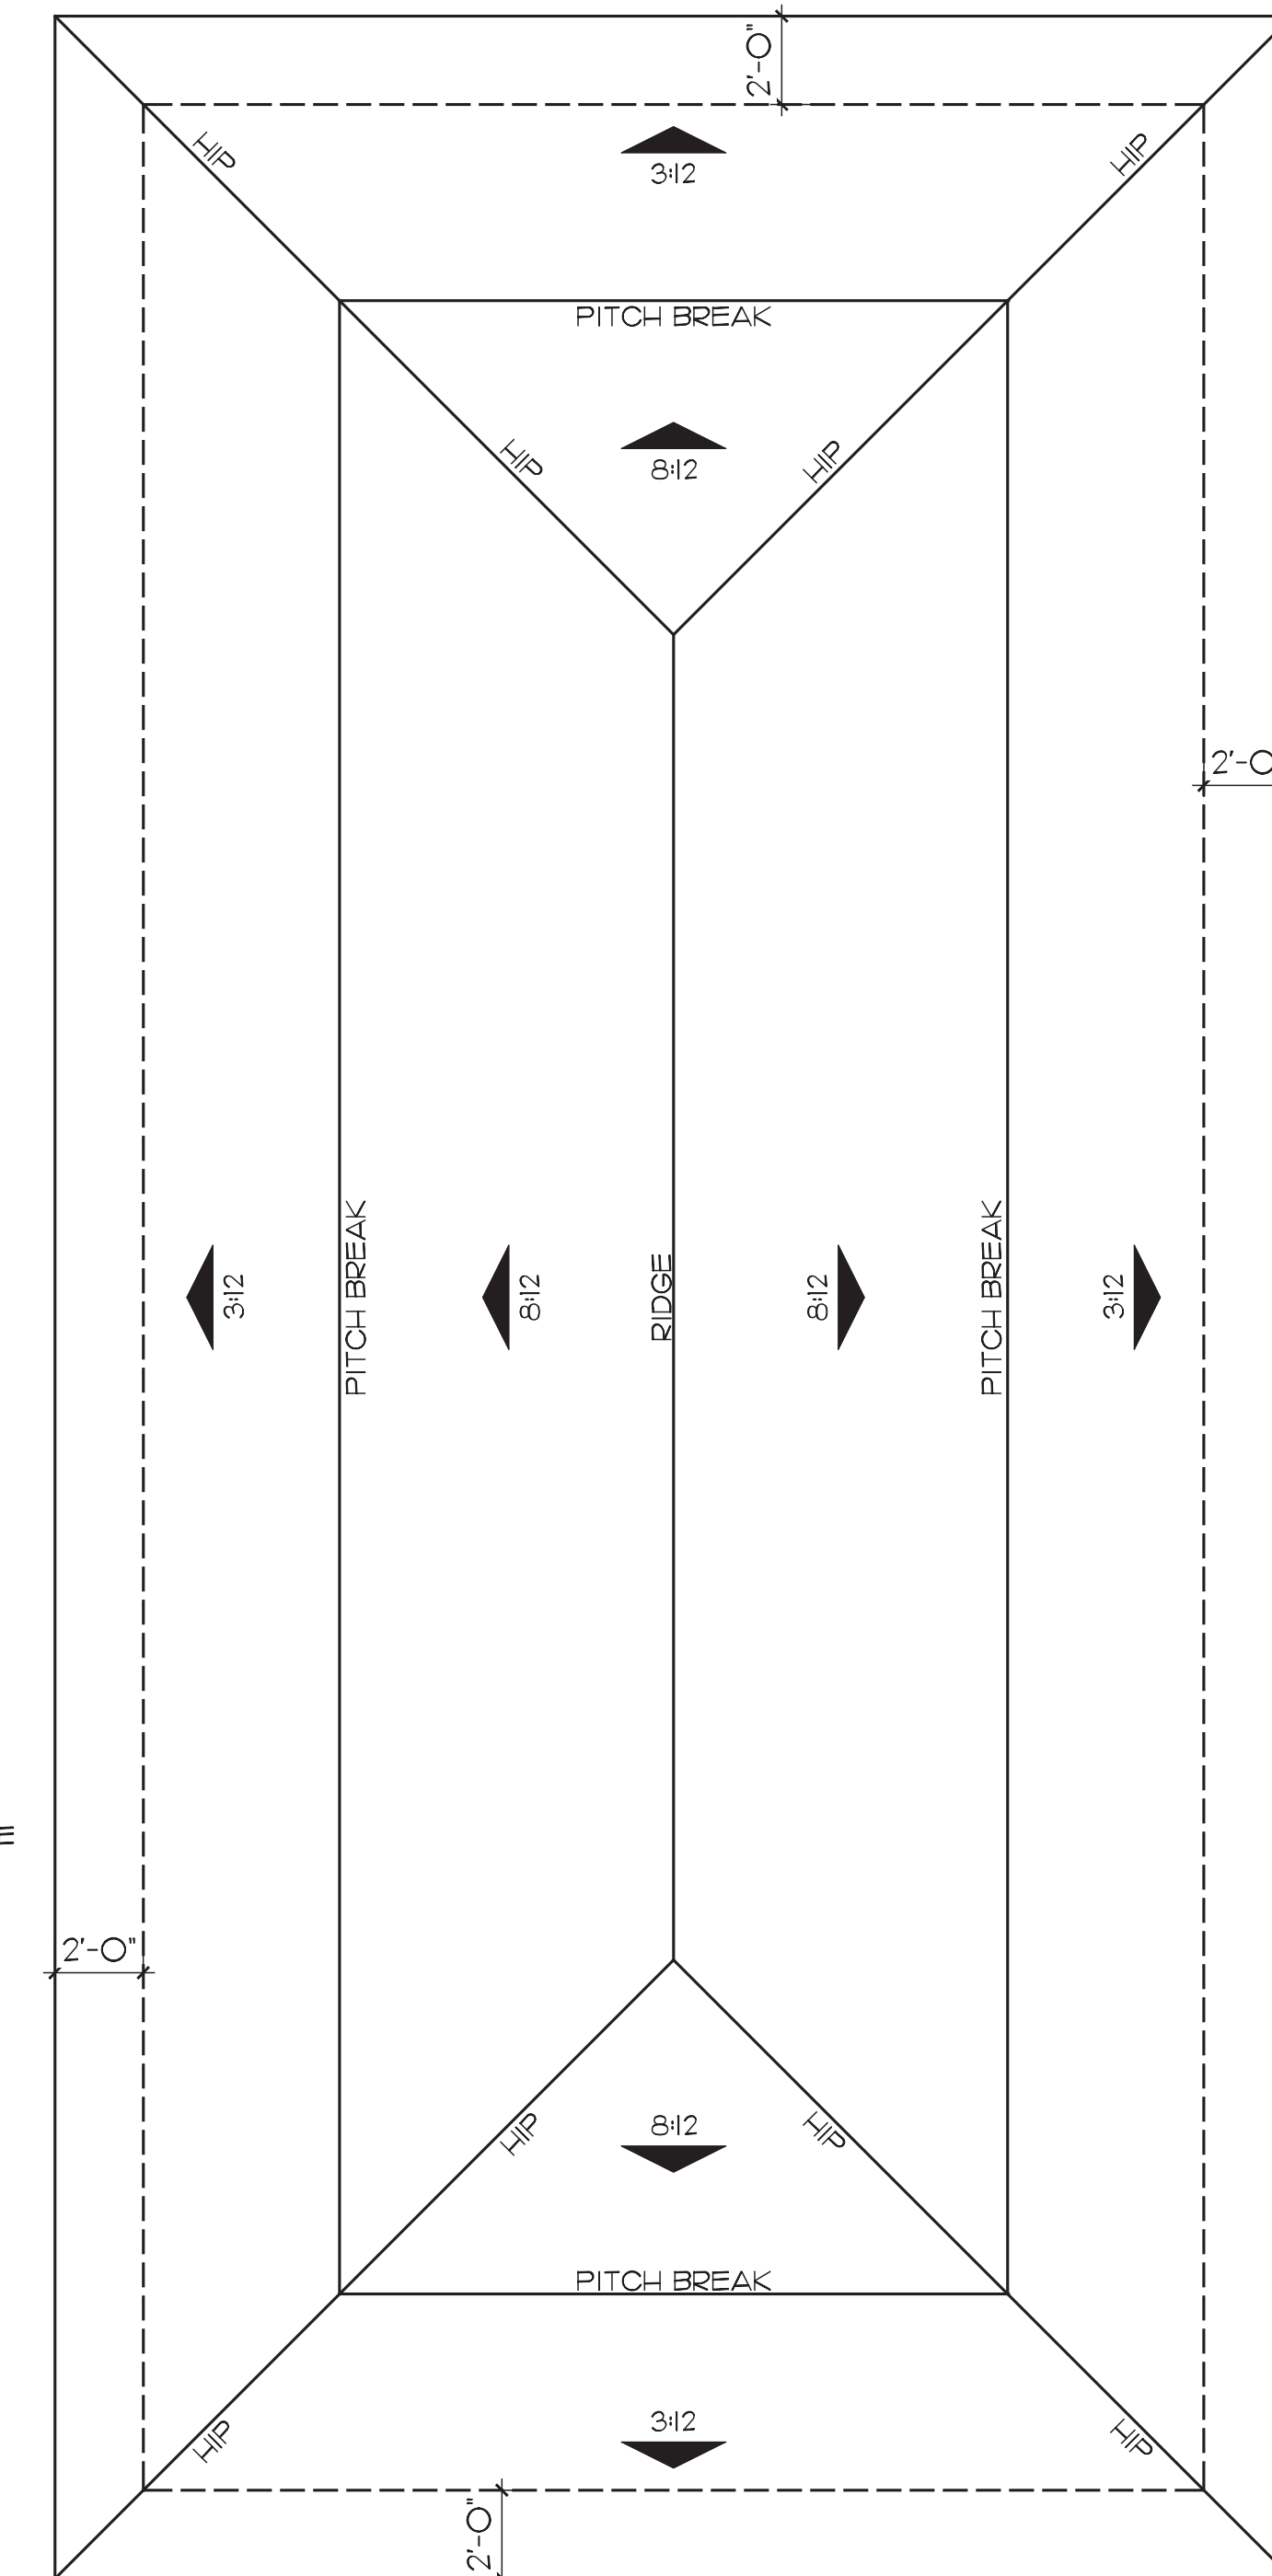


3 ROOF PLAN
 SCALE: 1/4"=1'-0"


NOTE: LOUVERS MUST ALLOW FOR MIN. 40% OPENING
 LOUVER BOARDS MUST NOT EXCEED 1" THICKNESS
 LOUVERS CAN BE CONNECTED TO FRAME BY SLOTS
 OR SECURED BY NAILS/ SCREWS FROM OUTSIDE 2X FRAME
 FRAMES ARE TO BE CONSTRUCTED W/ LOUVERS THEN
 TAPPED INTO PLACE - MINIMUM NAILING ALLOWED
 TO ATTACH - 1 NAIL @ 16" O.C. IN TOP AND BOTTOM
 MAY SECURE TOP & BOTTOM PLATE AS PERMANENT
 FRAME TO FIT INSIDE THEN USE 1" NAIL @ 16" O.C.

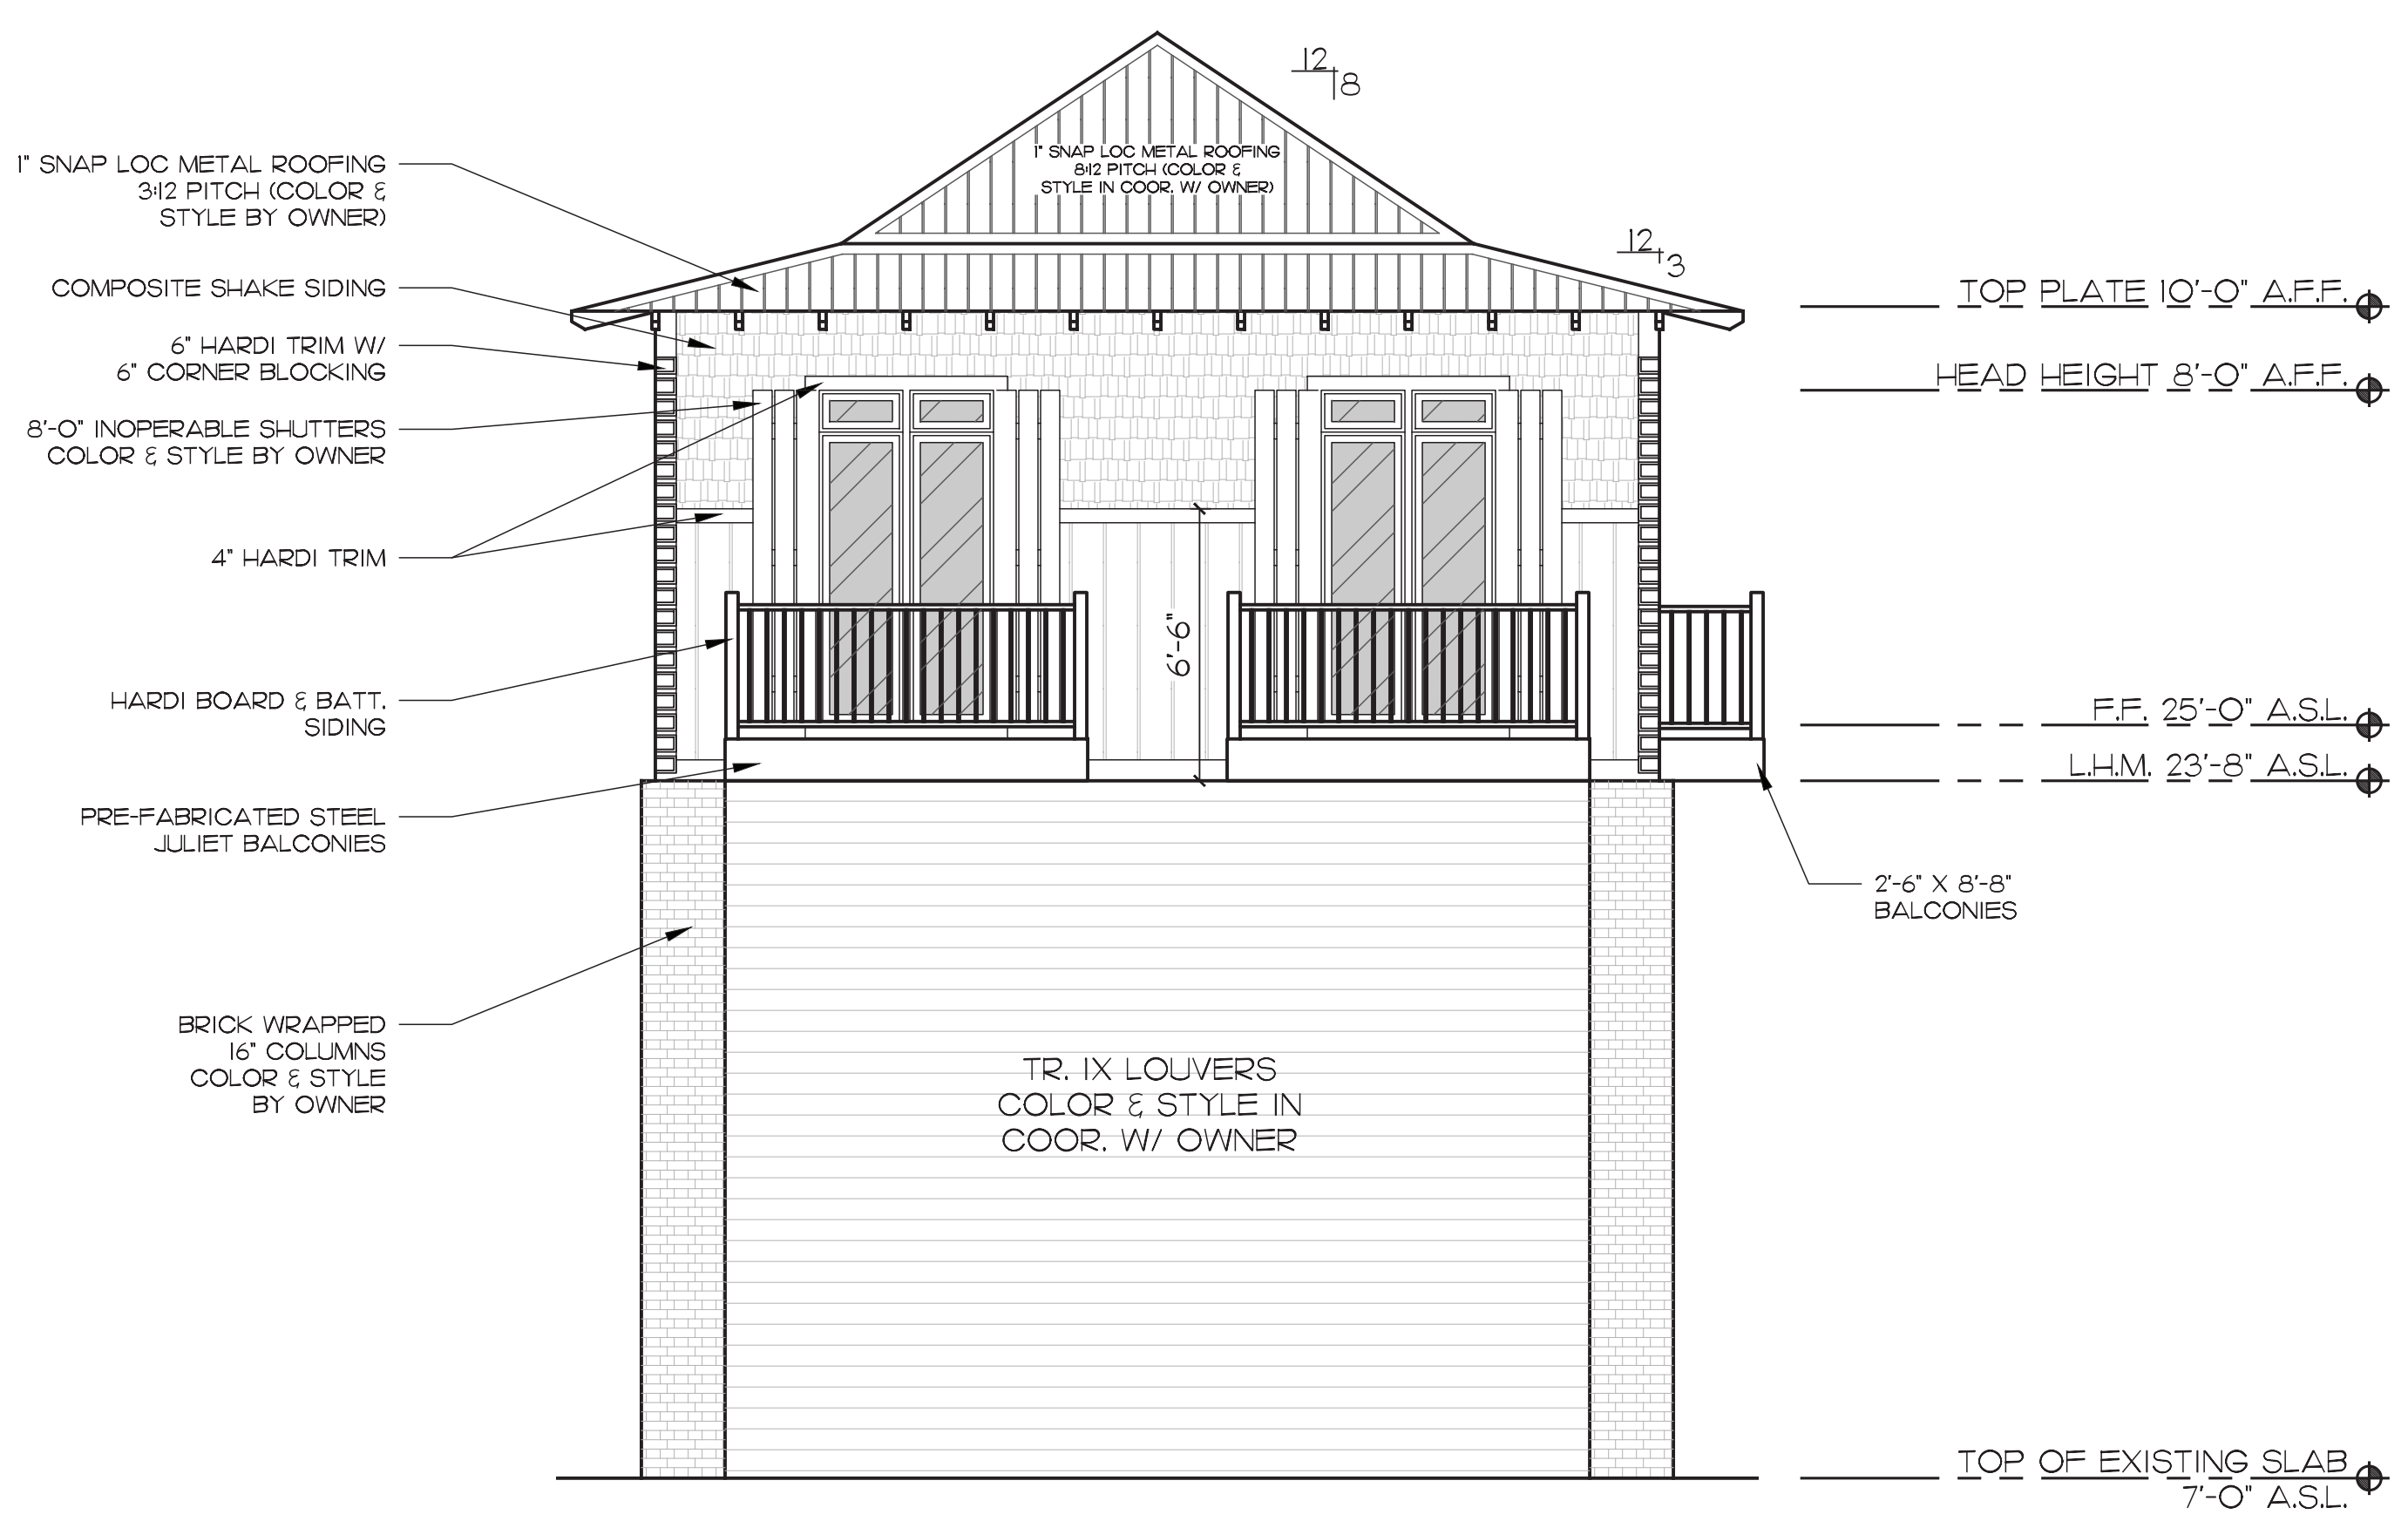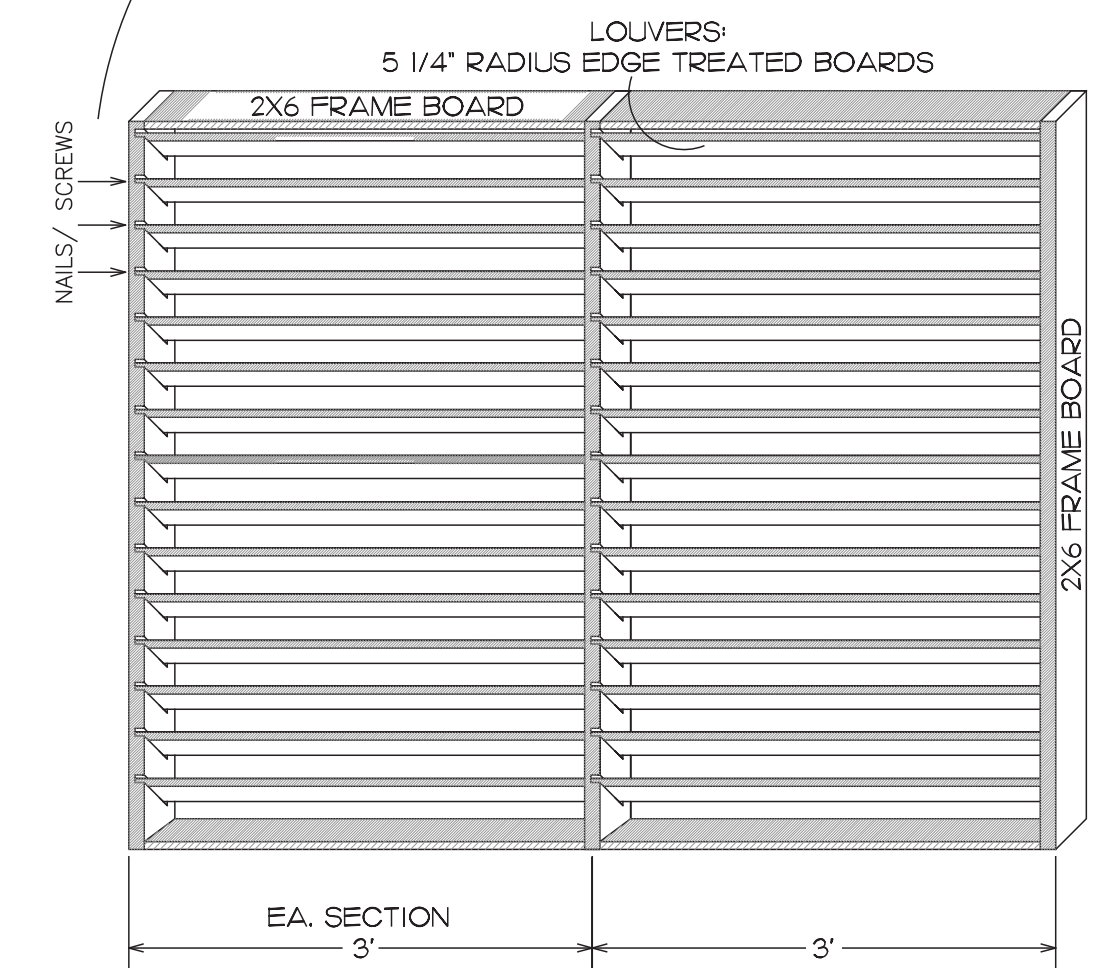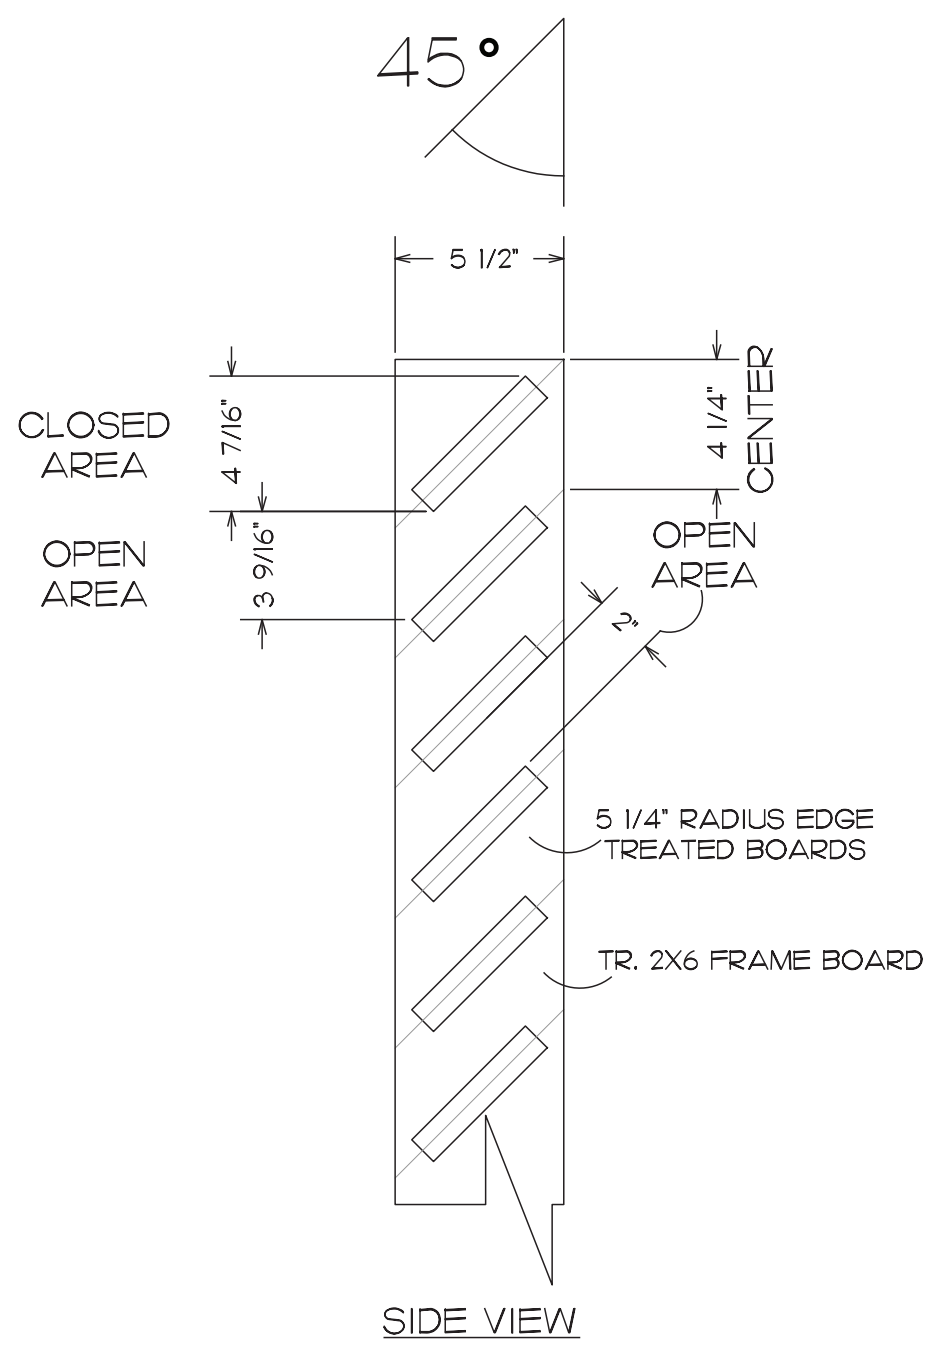


1 BONUS BUILDING EAST ELEVATION
 SCALE: 1/4"=1'-0"

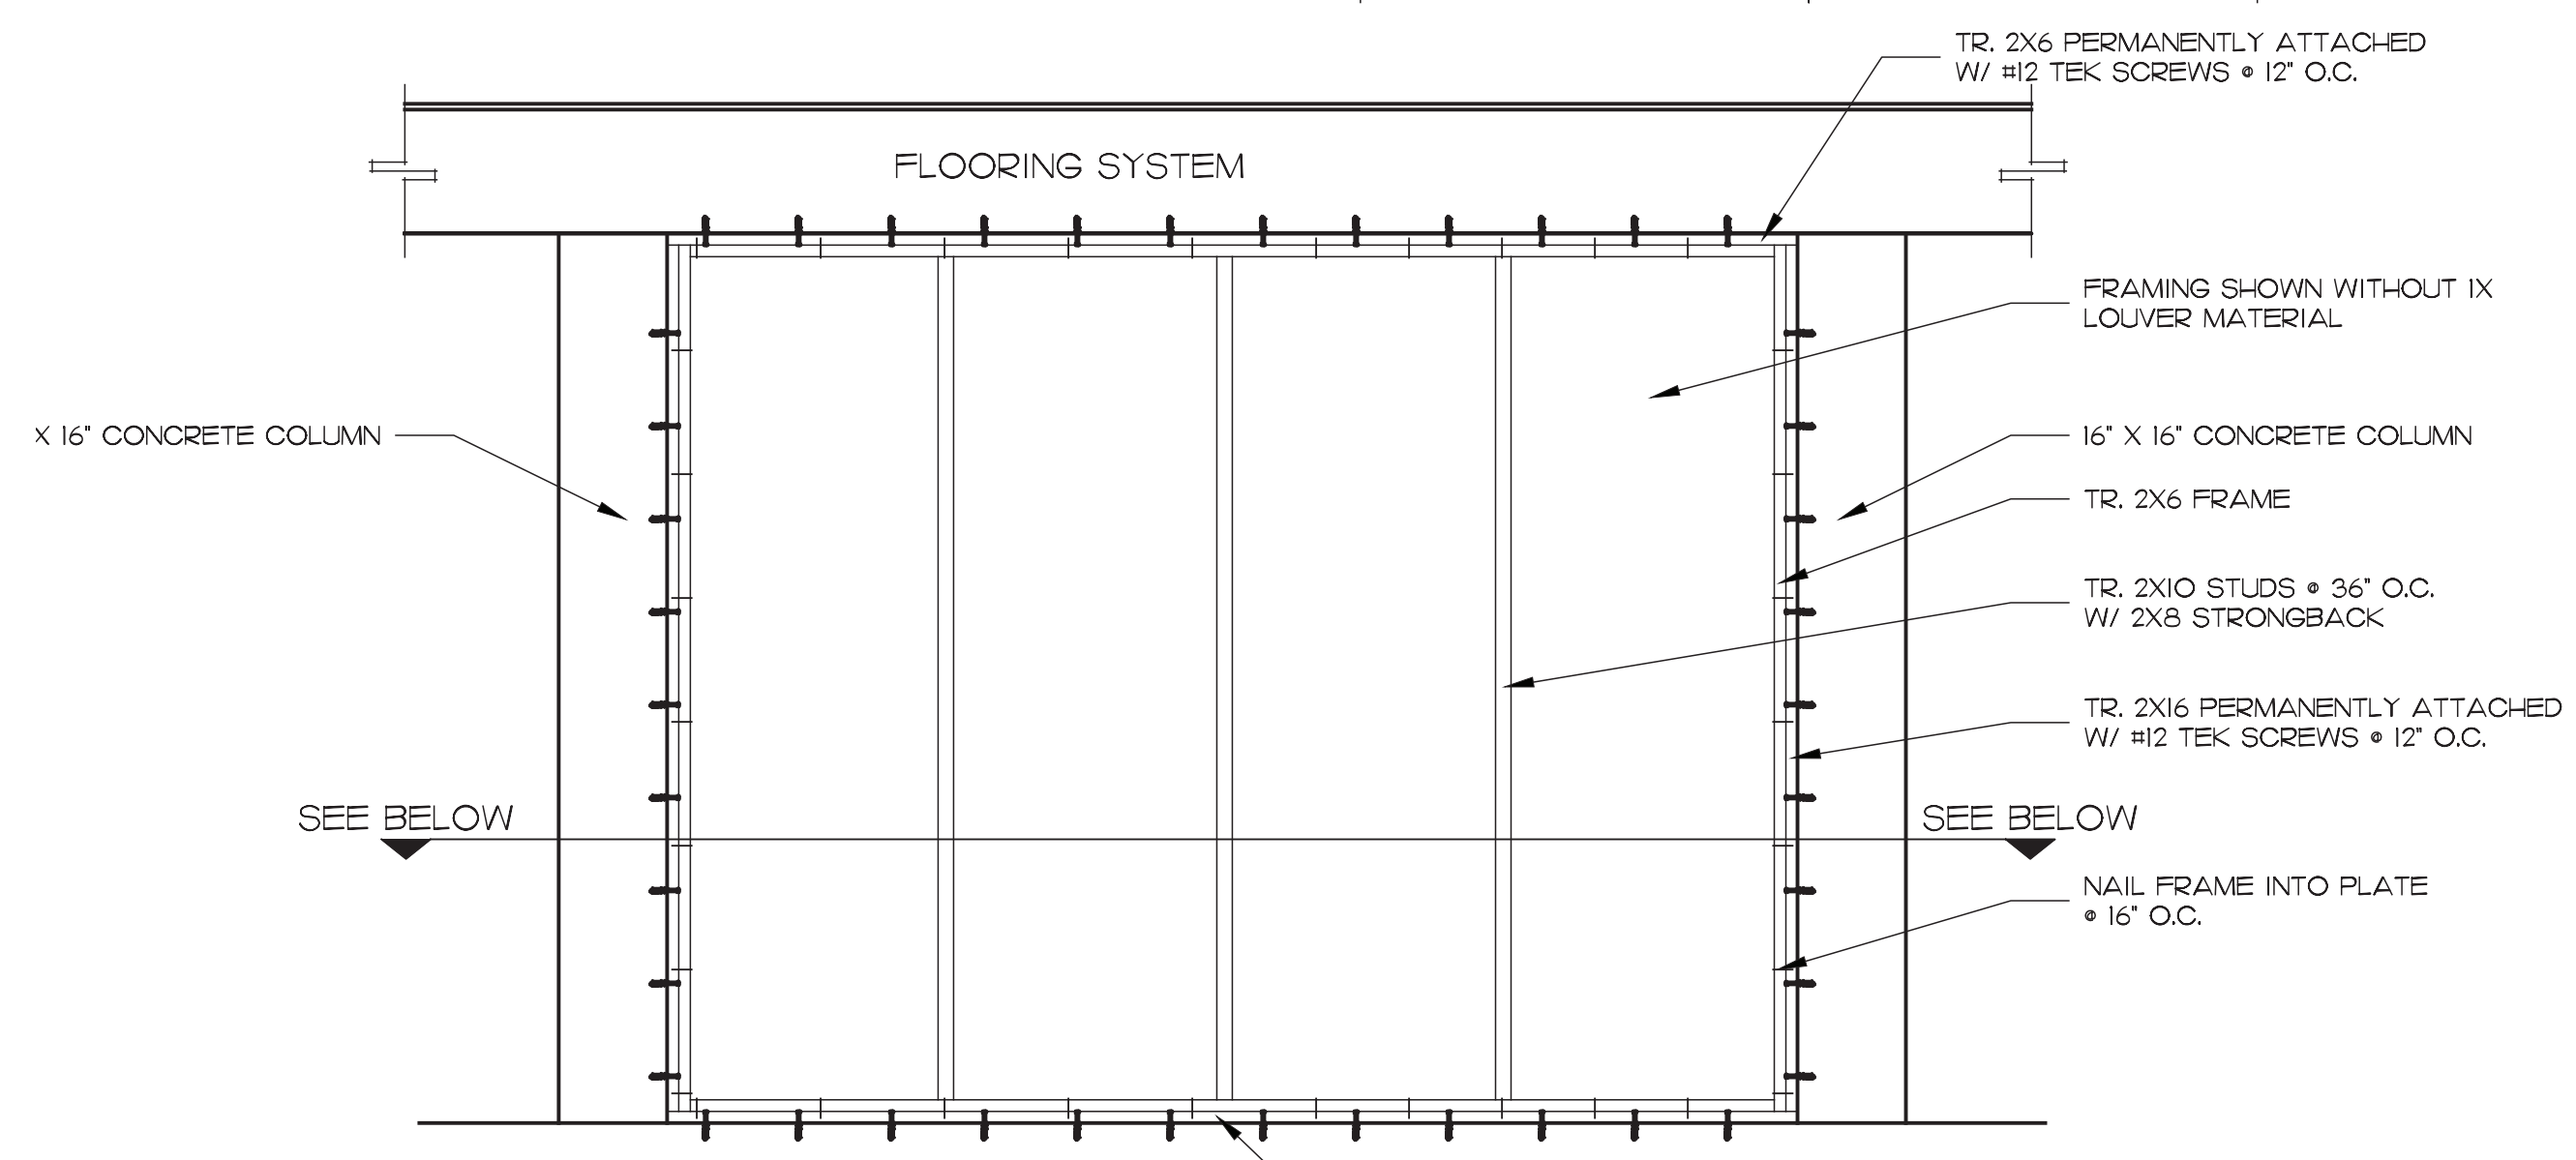

3 LOUVER WALL DETAIL
 SCALE: 1/2"=1'-0"

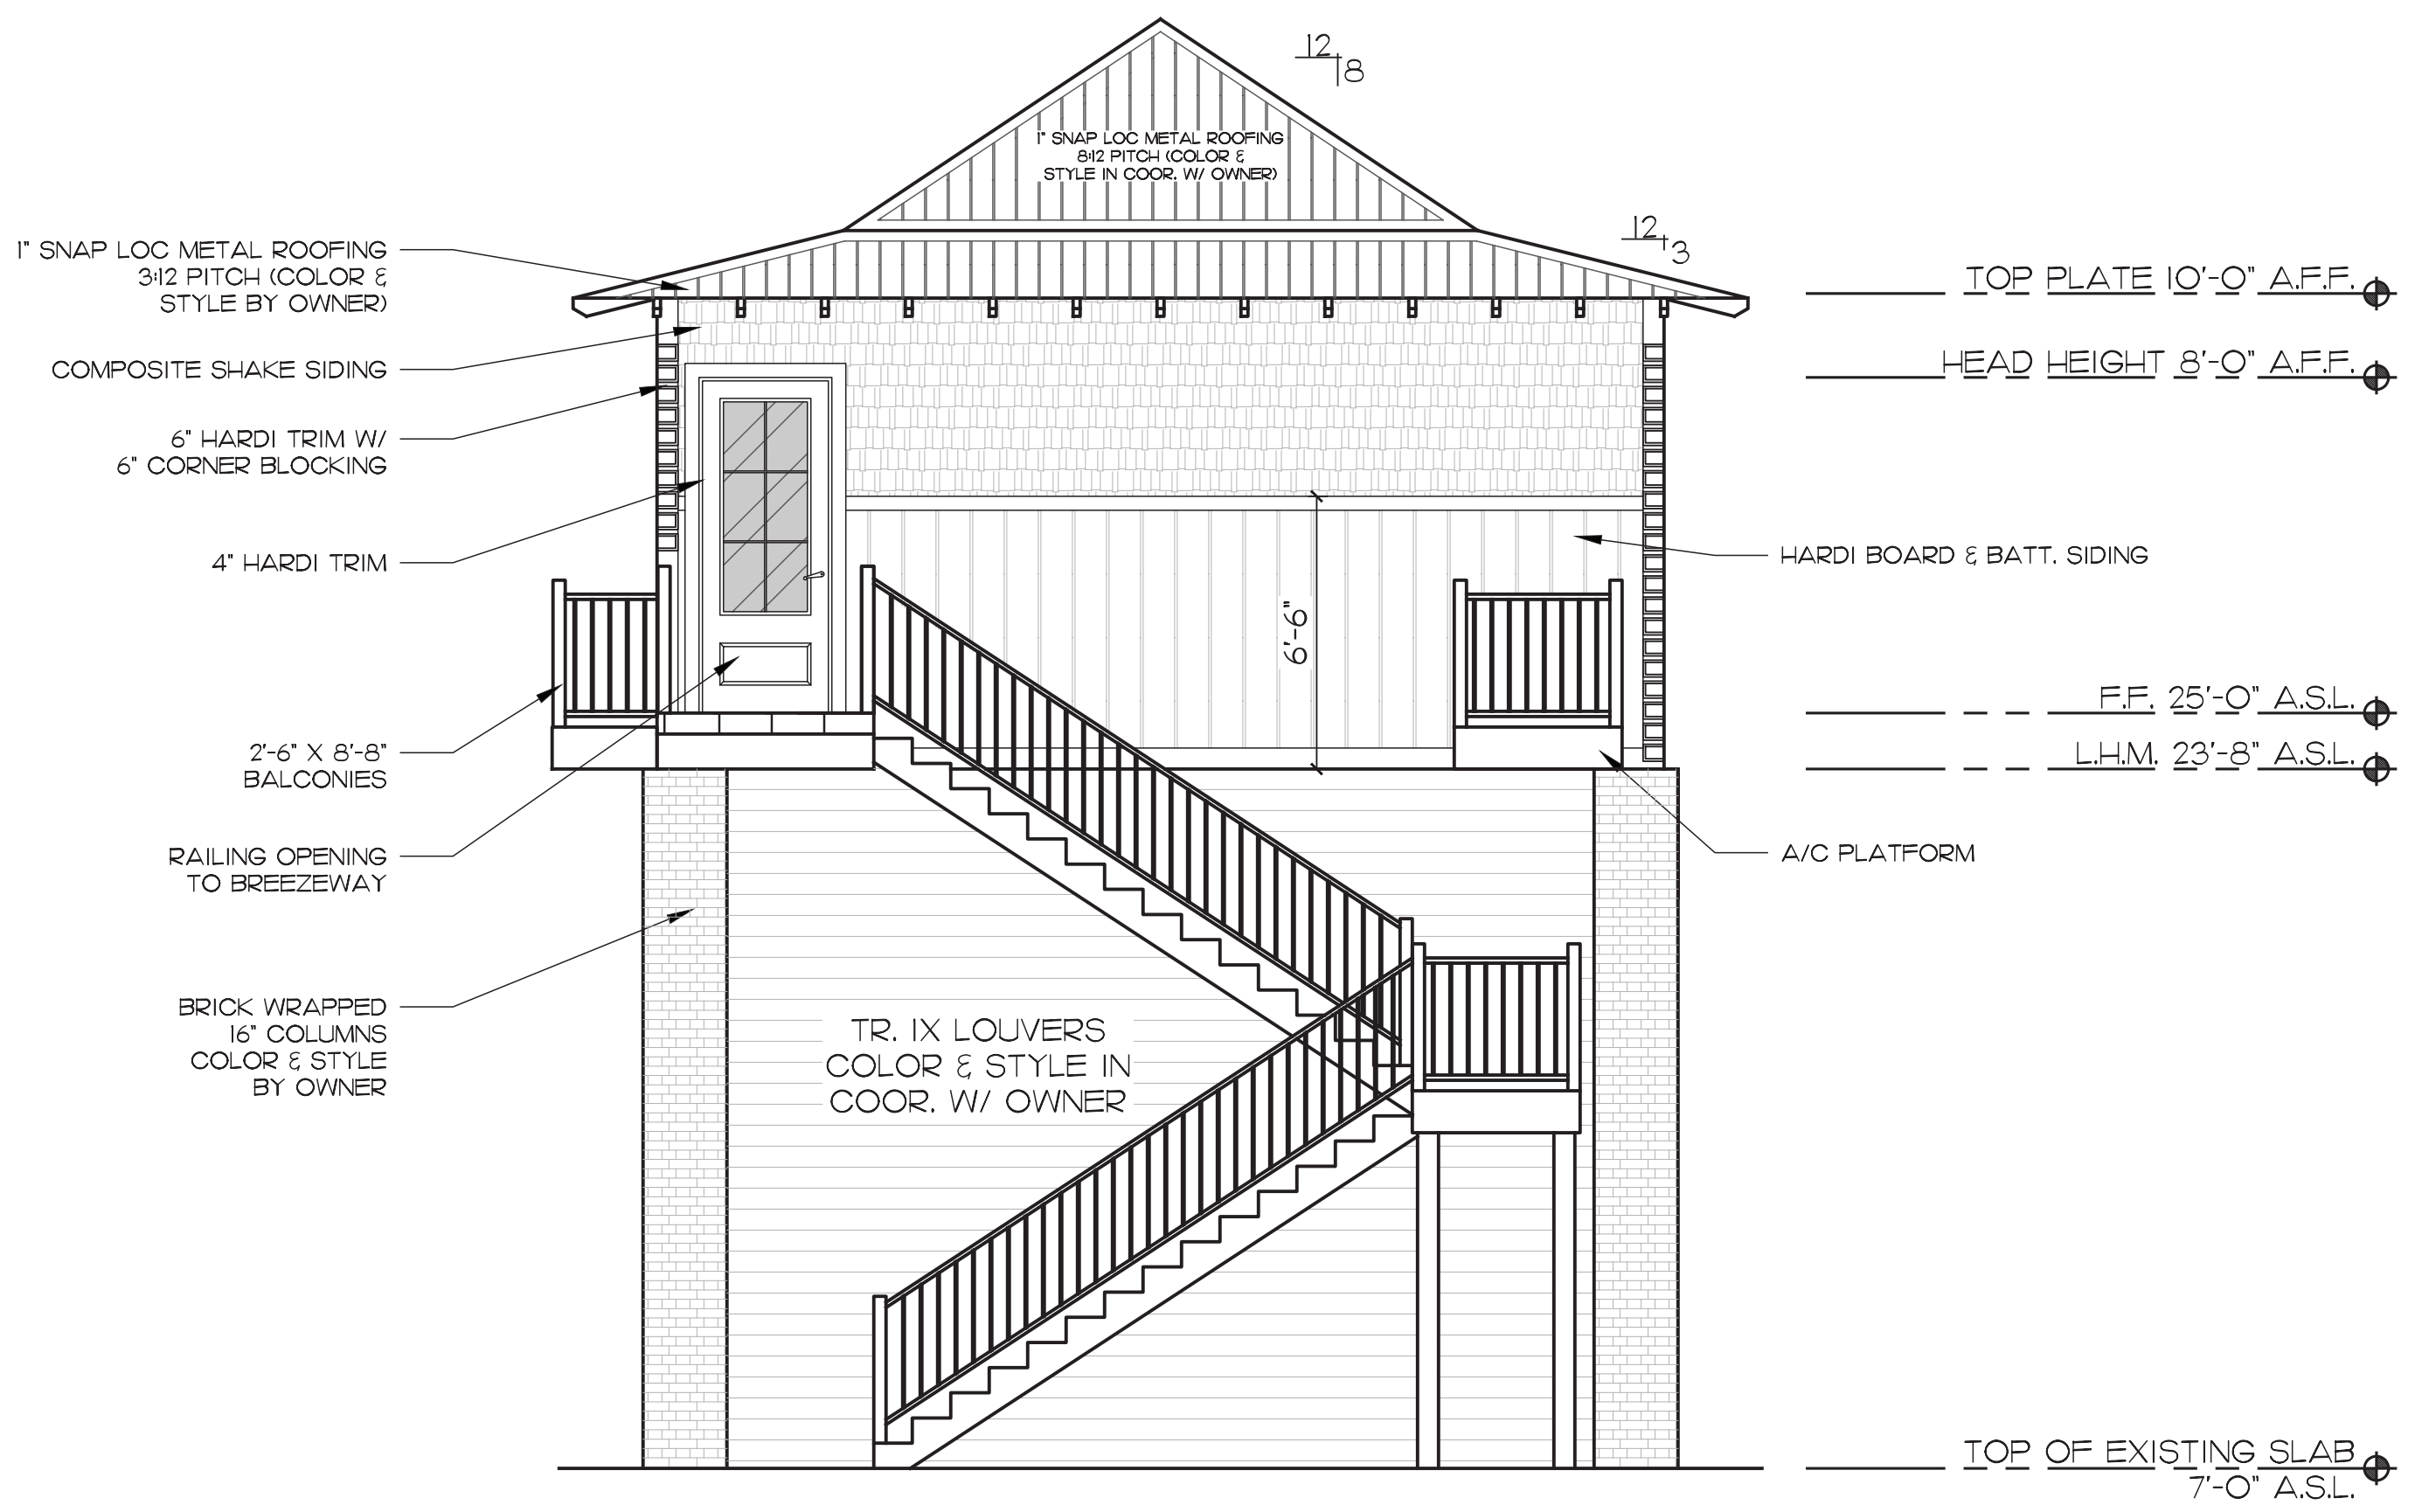


2 BONUS BUILDING WEST ELEVATION
 SCALE: 1/4"=1'-0"

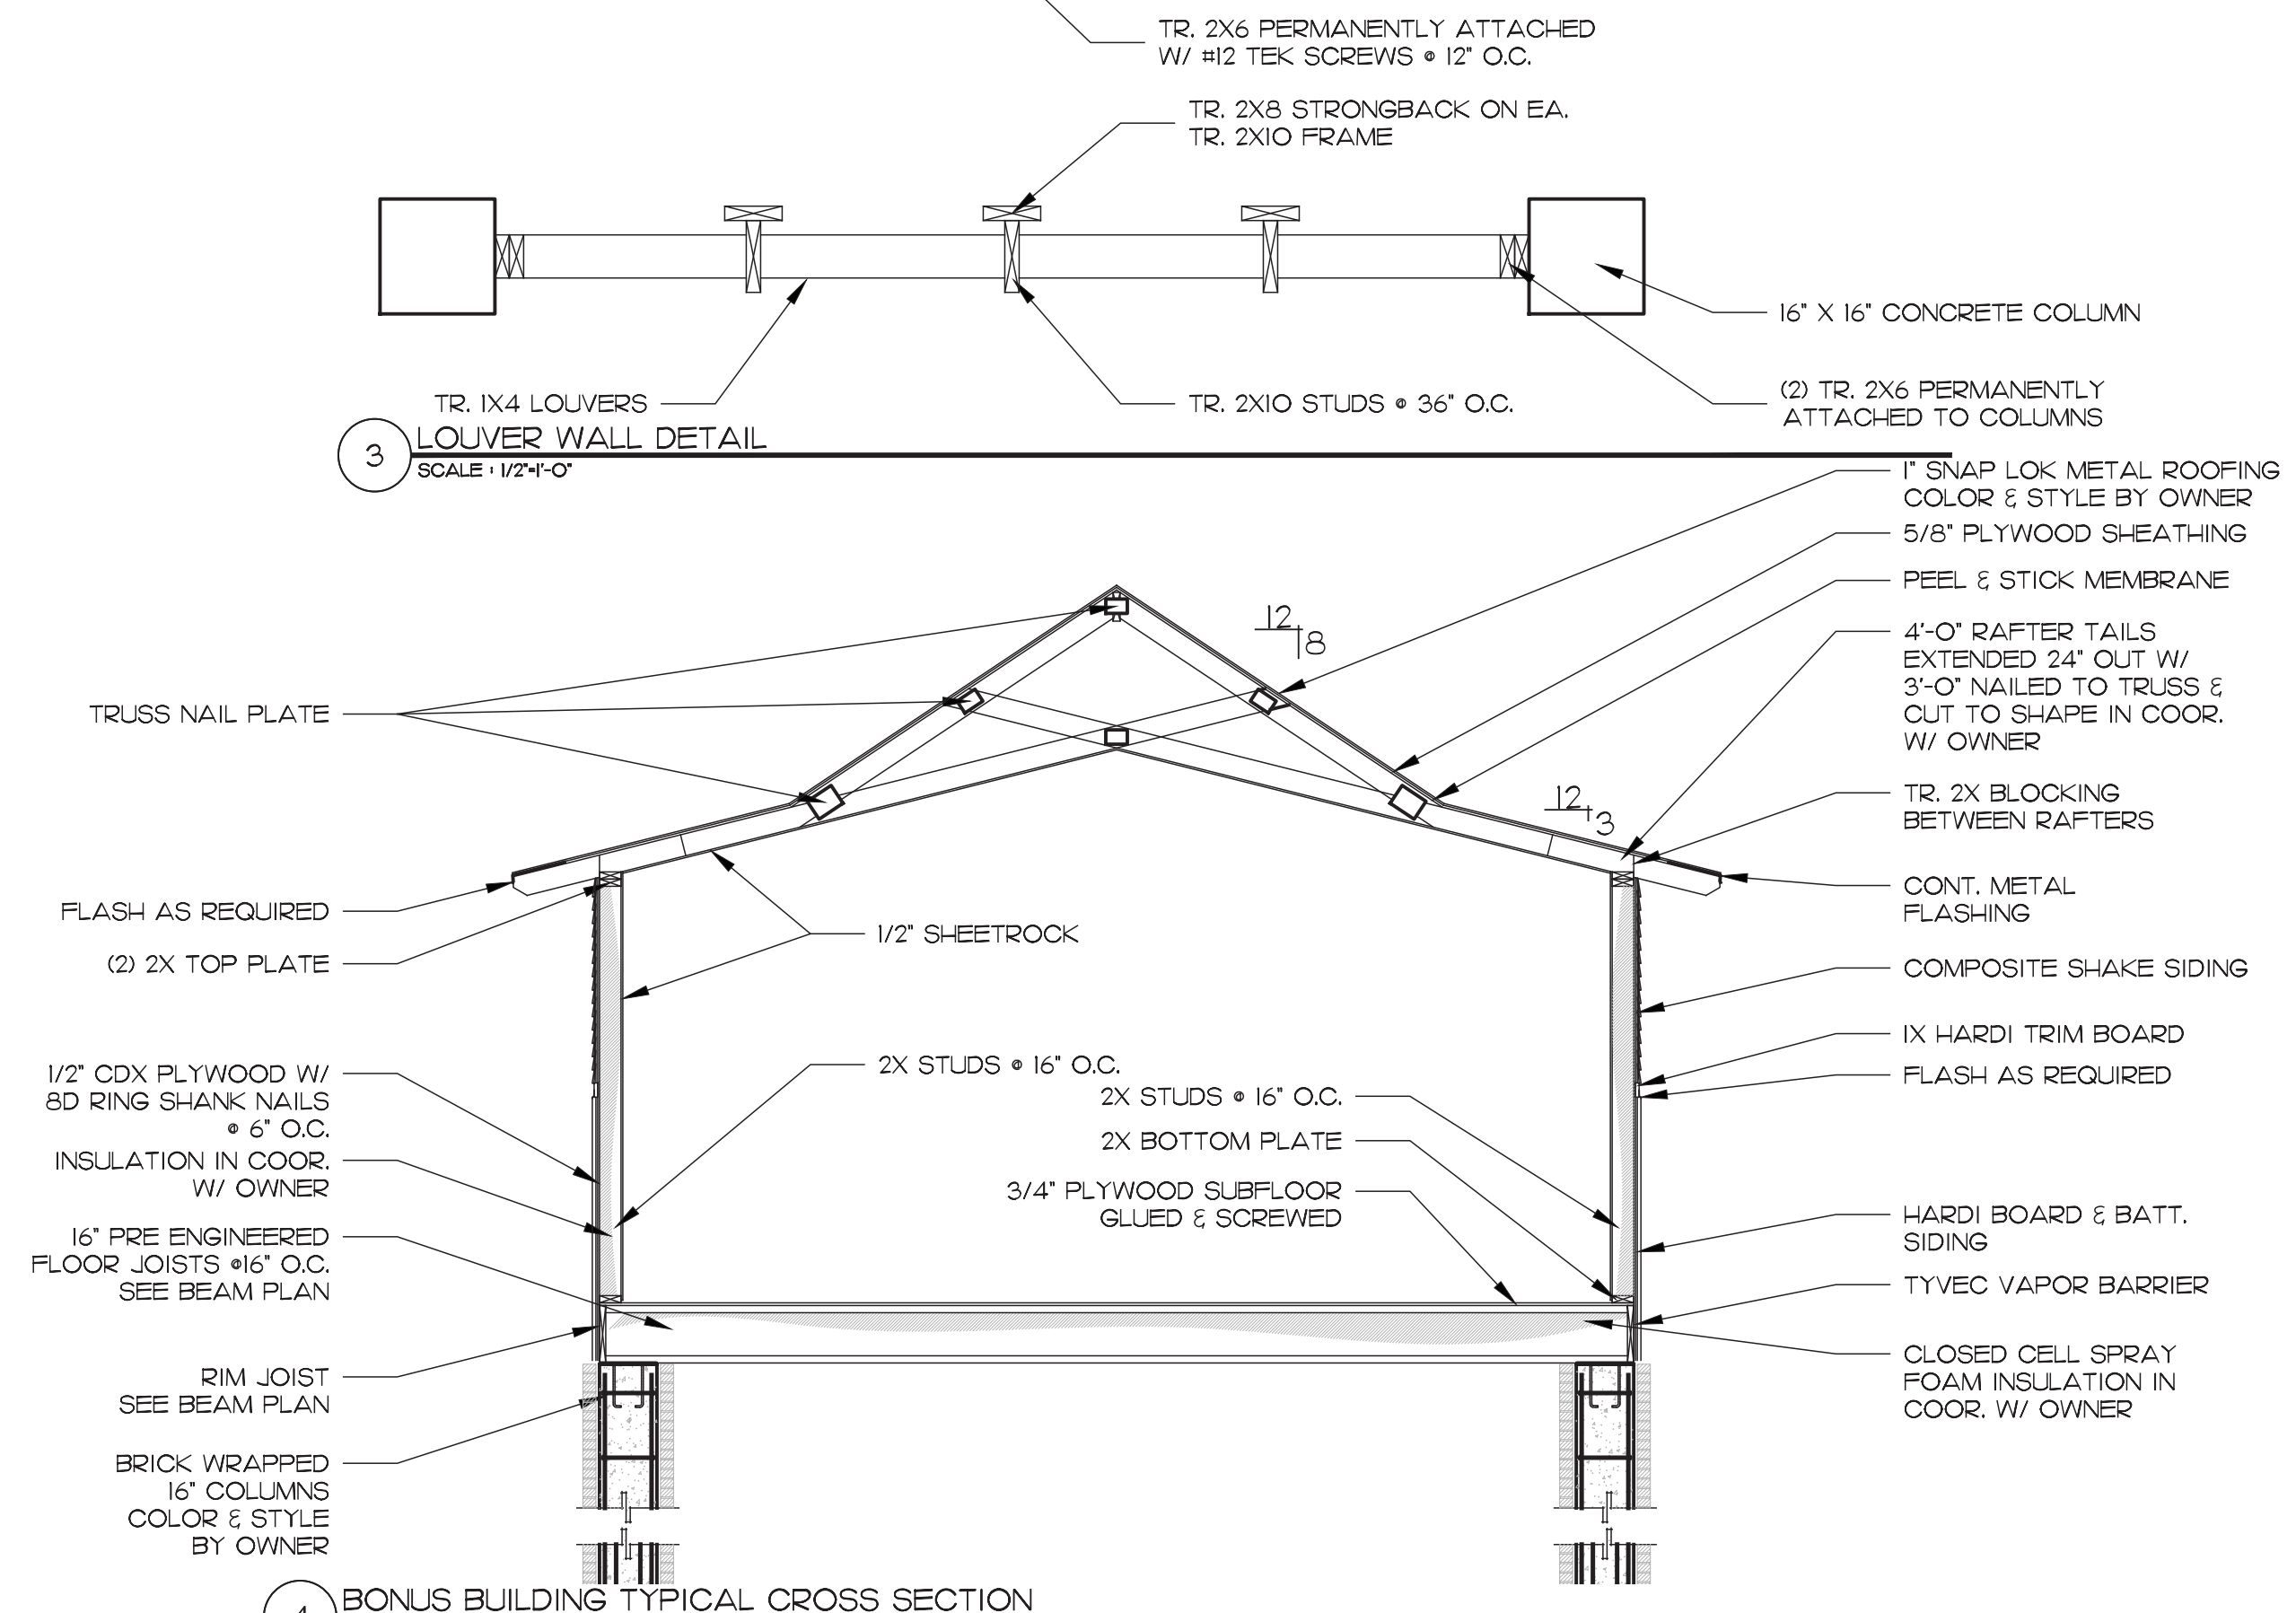


4 BONUS BUILDING TYPICAL CROSS SECTION
 SCALE: 1/4"=1'-0"

TOP PLATE 10'-0" A.F.F.
 HEAD HEIGHT 8'-0" A.F.F.
 8'-0" INOPERABLE SHUTTERS
 COLOR & STYLE BY OWNER
 COMPOSITE SHAKE SIDING
 HARDI BOARD & BATT.
 SIDING
 F.F. 25'-0" A.S.L.
 L.H.M. 23'-8" A.S.L.
 BRICK WRAPPED
 16" COLUMNS
 COLOR & STYLE
 BY OWNER
 TOP OF EXISTING SLAB
 7'-0" A.S.L.

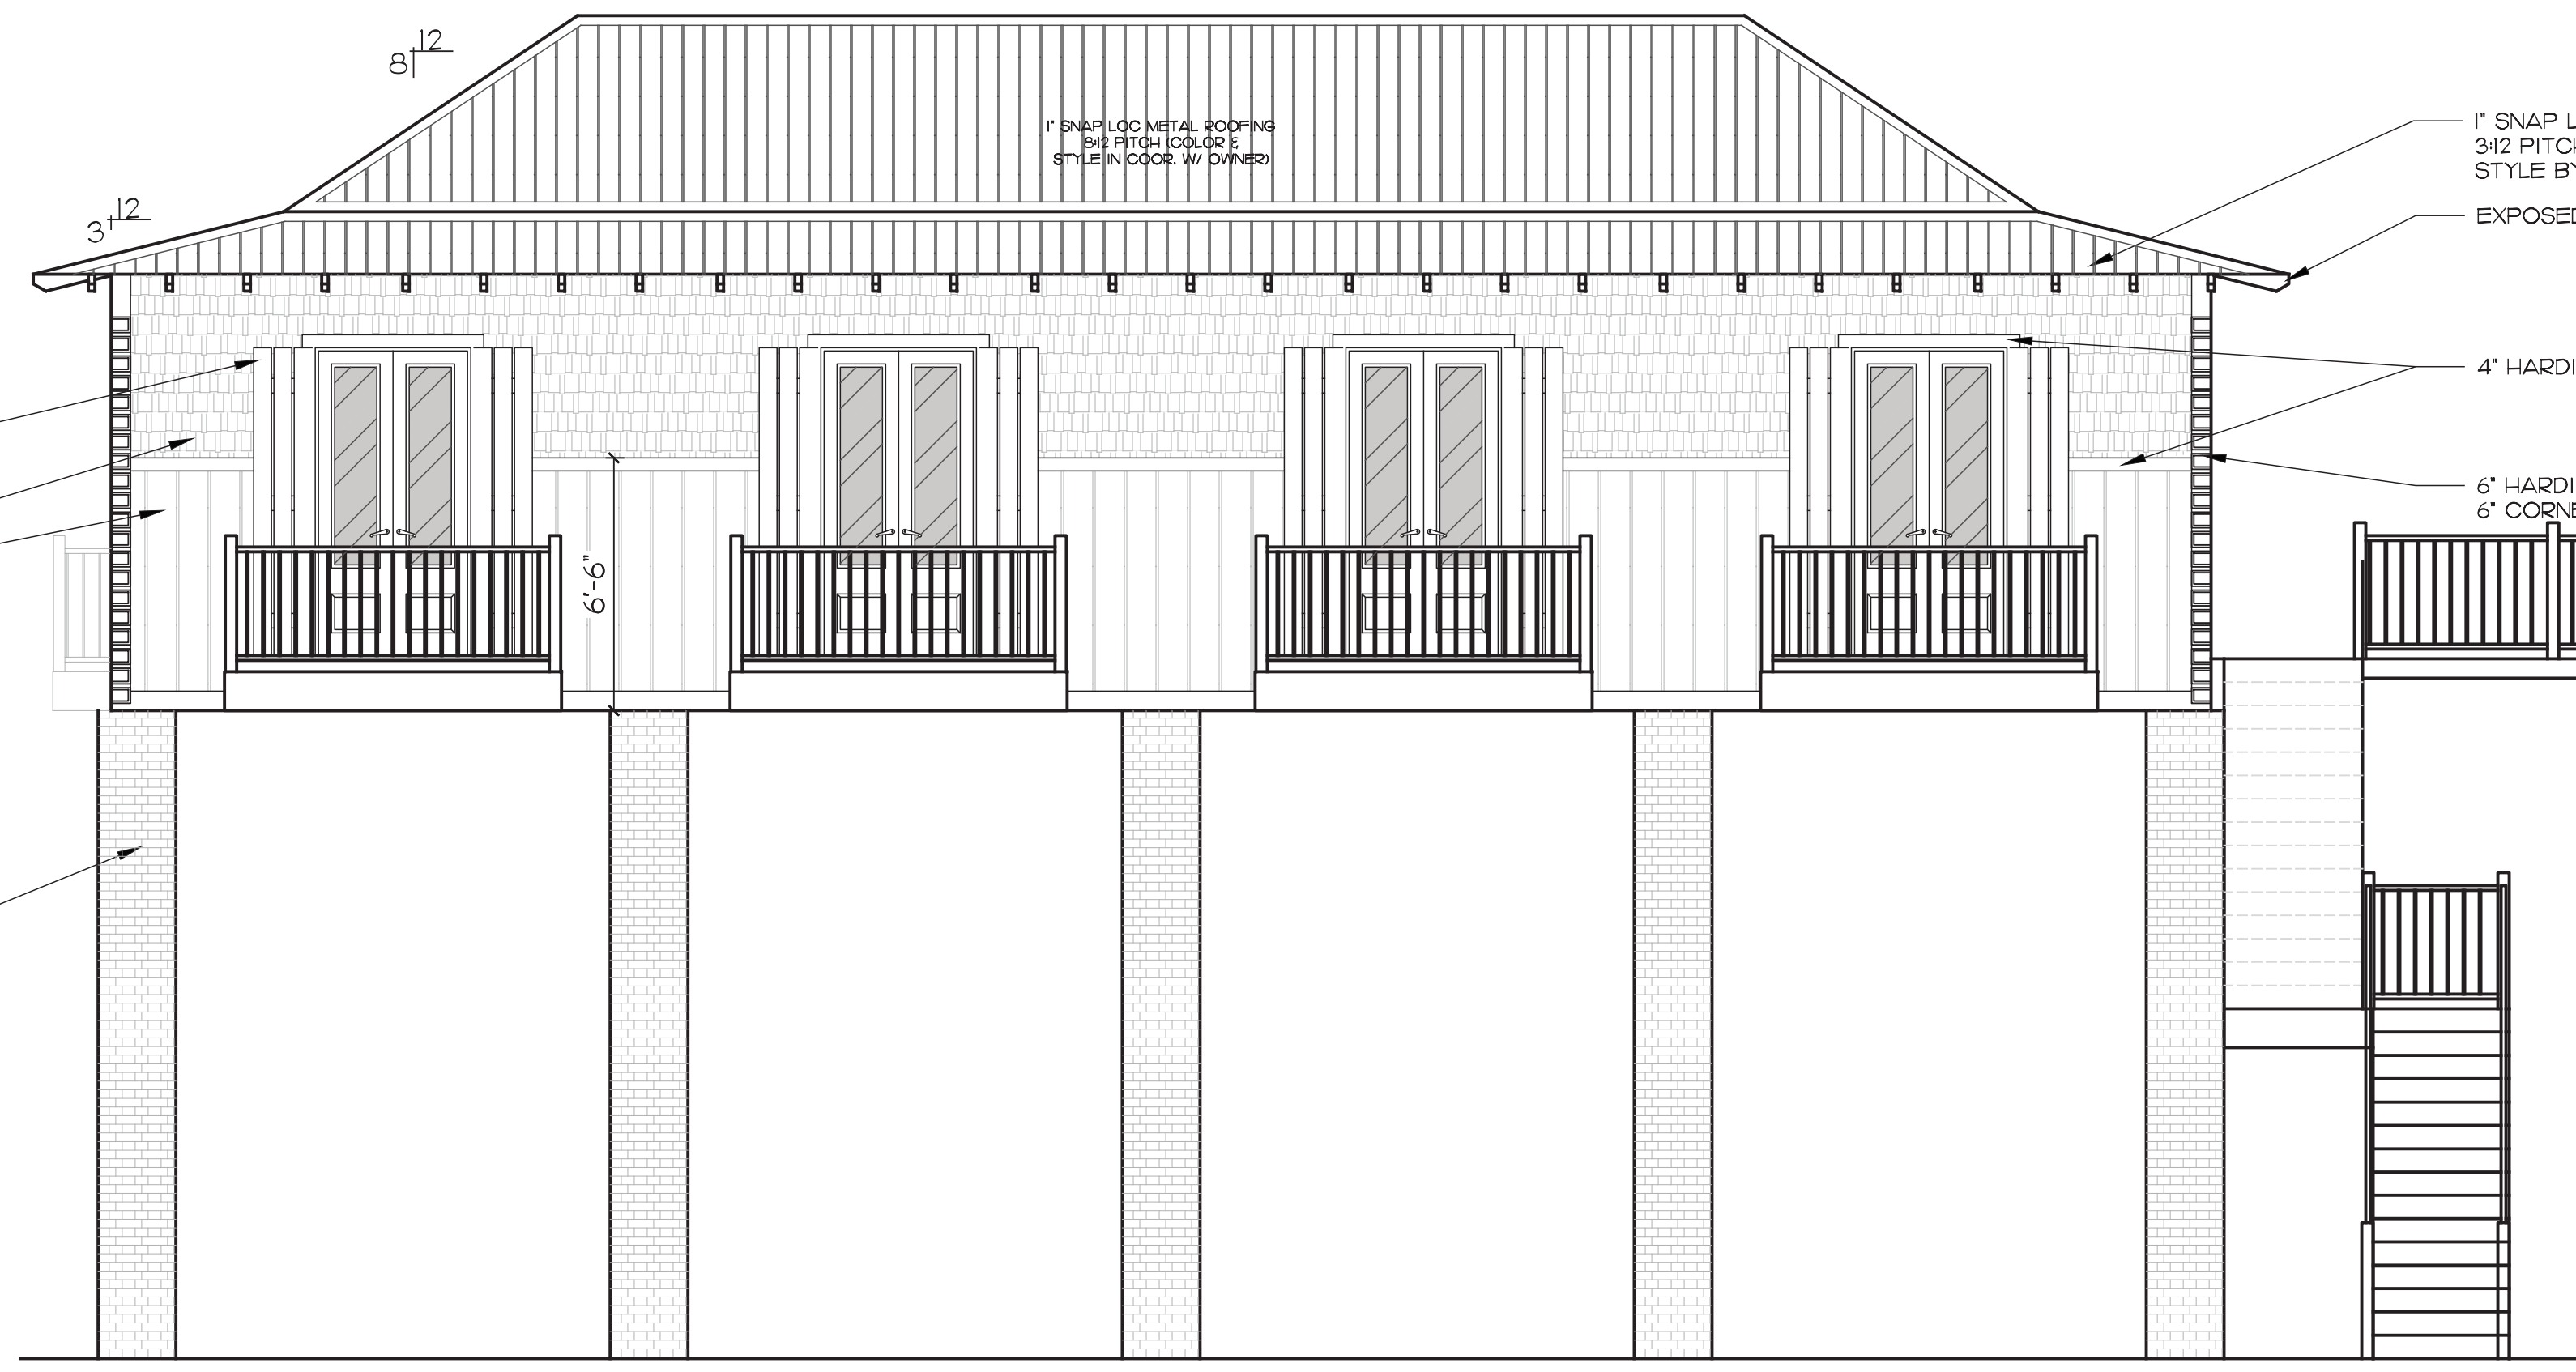


1 BONUS BUILDING NORTH ELEVATION
 SCALE: 1/4"=1'-0"

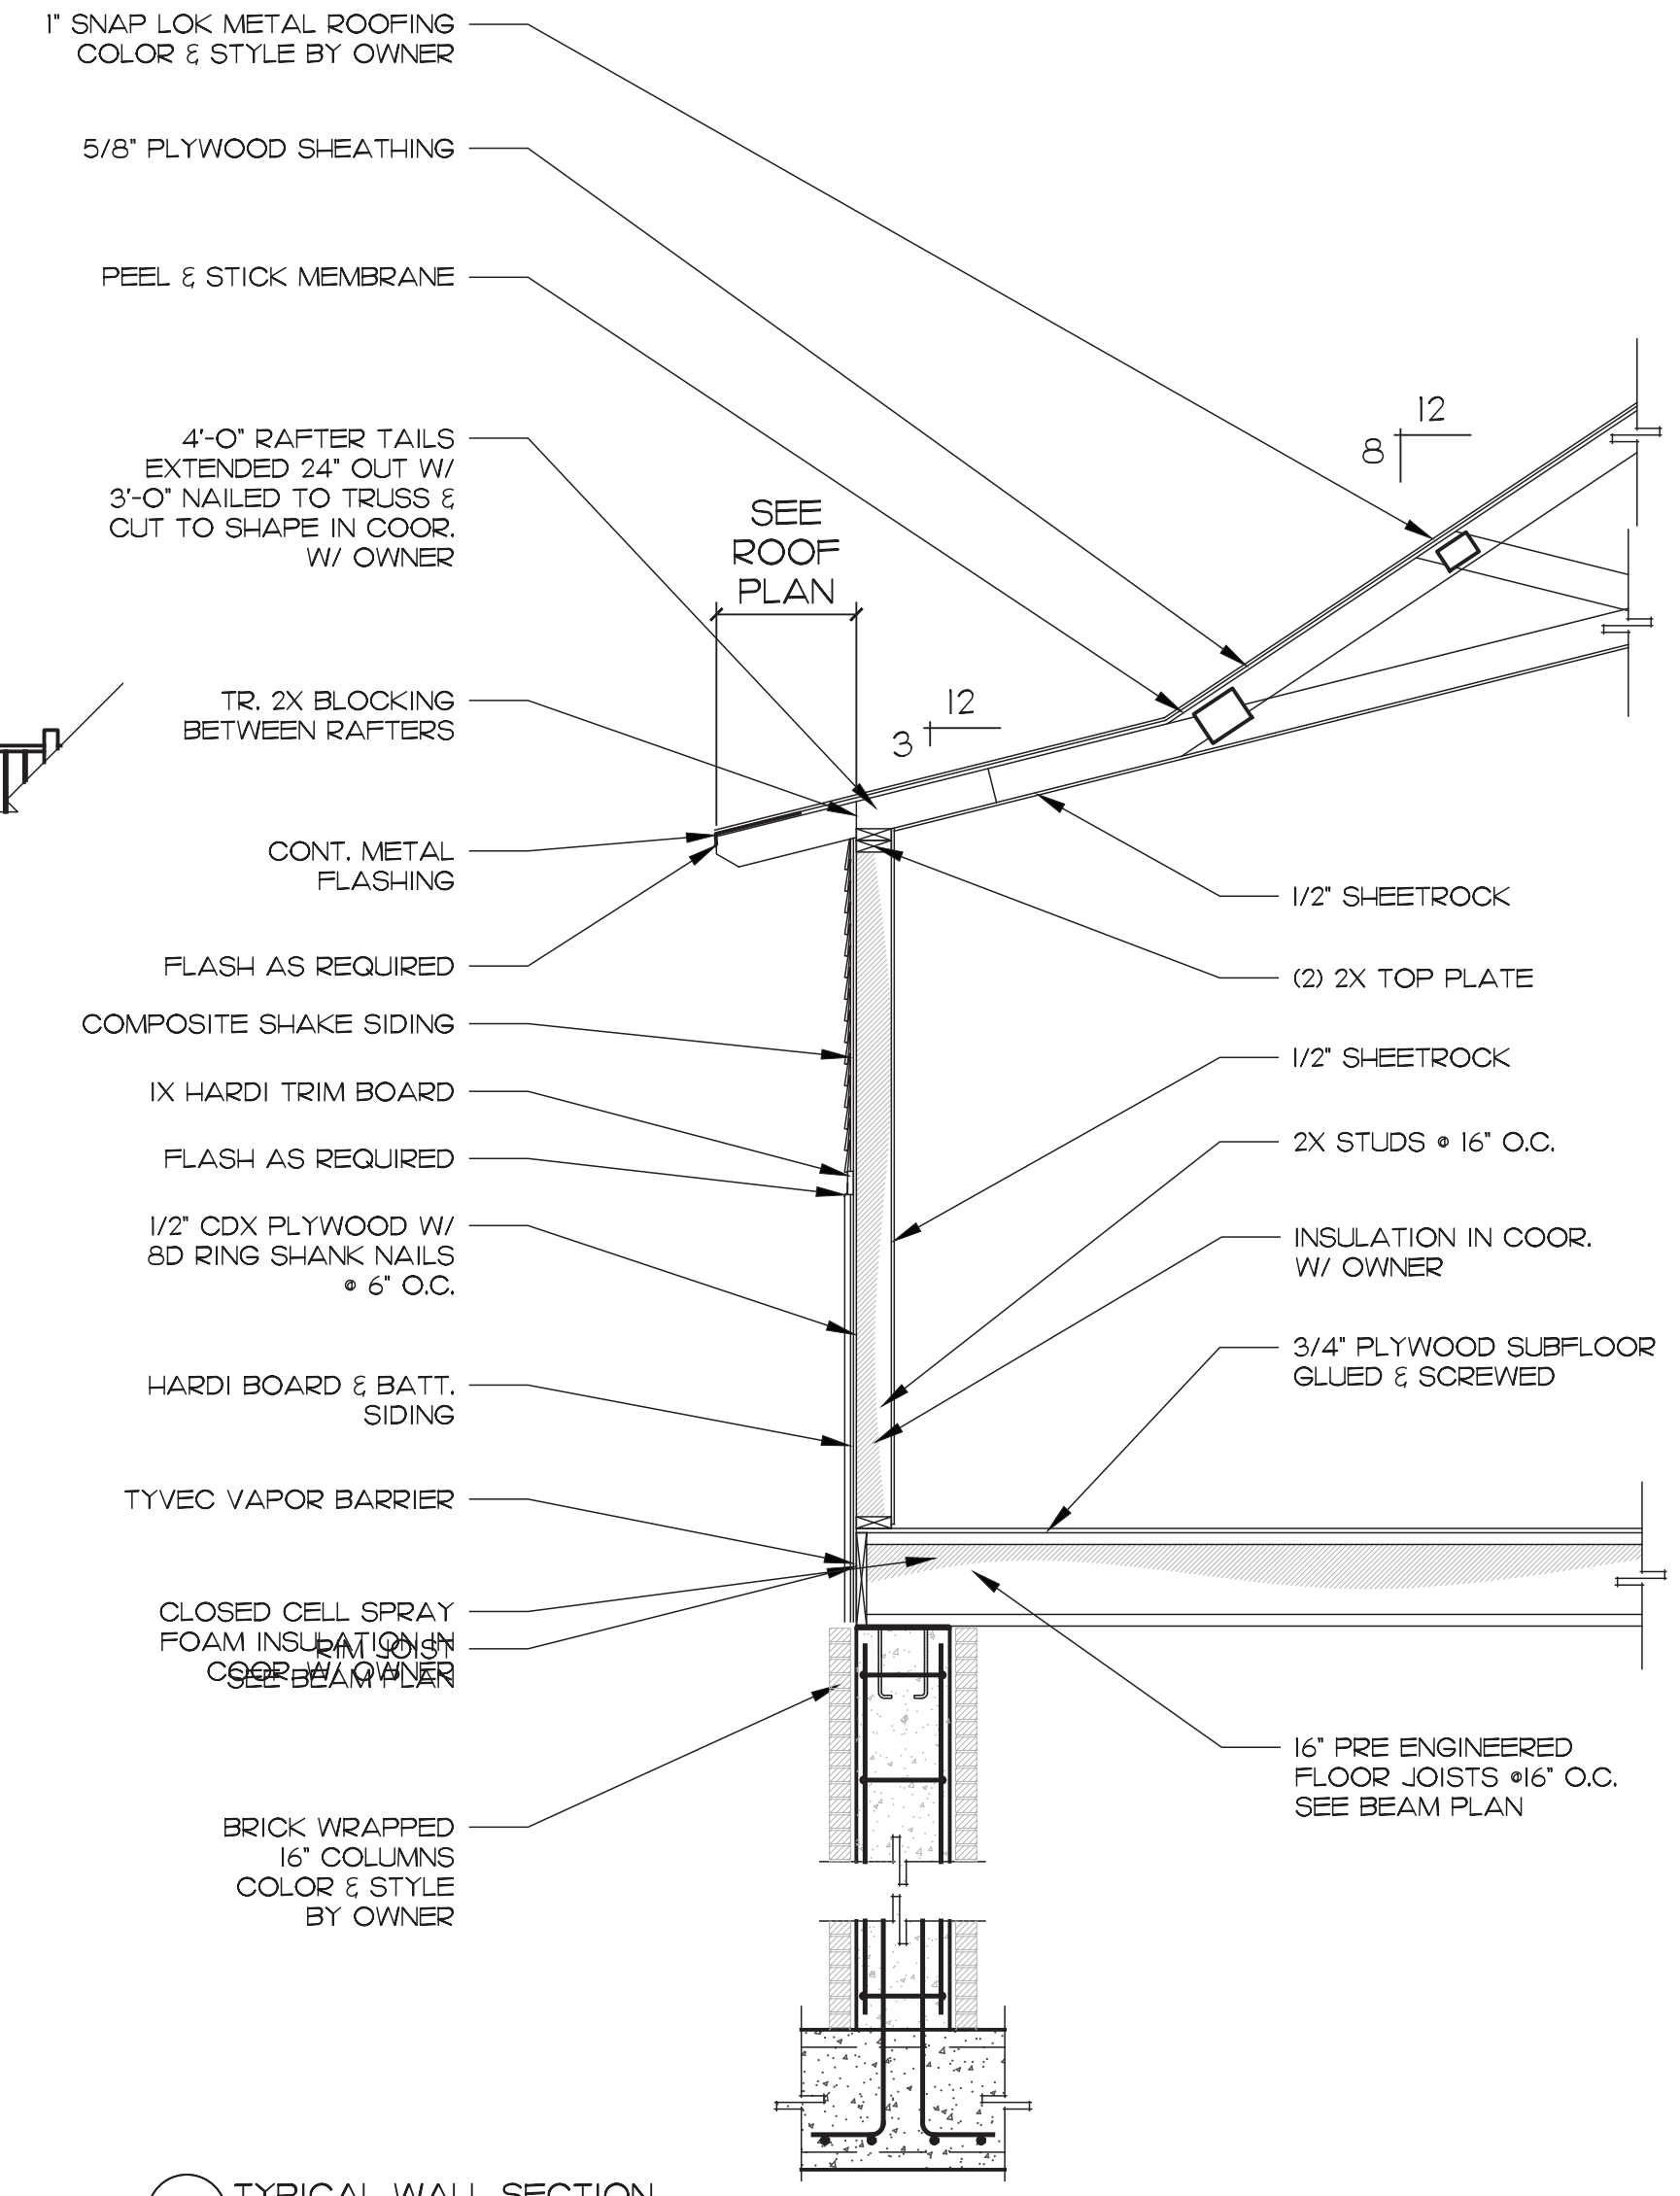


3 TYPICAL WALL SECTION
 SCALE: 1/2"=1'-0"

TOP PLATE 10'-0" A.F.F.
 HEAD HEIGHT 8'-0" A.F.F.
 F.F. 25'-0" A.S.L.
 L.H.M. 23'-8" A.S.L.
 TOP OF EXISTING SLAB
 7'-0" A.S.L.

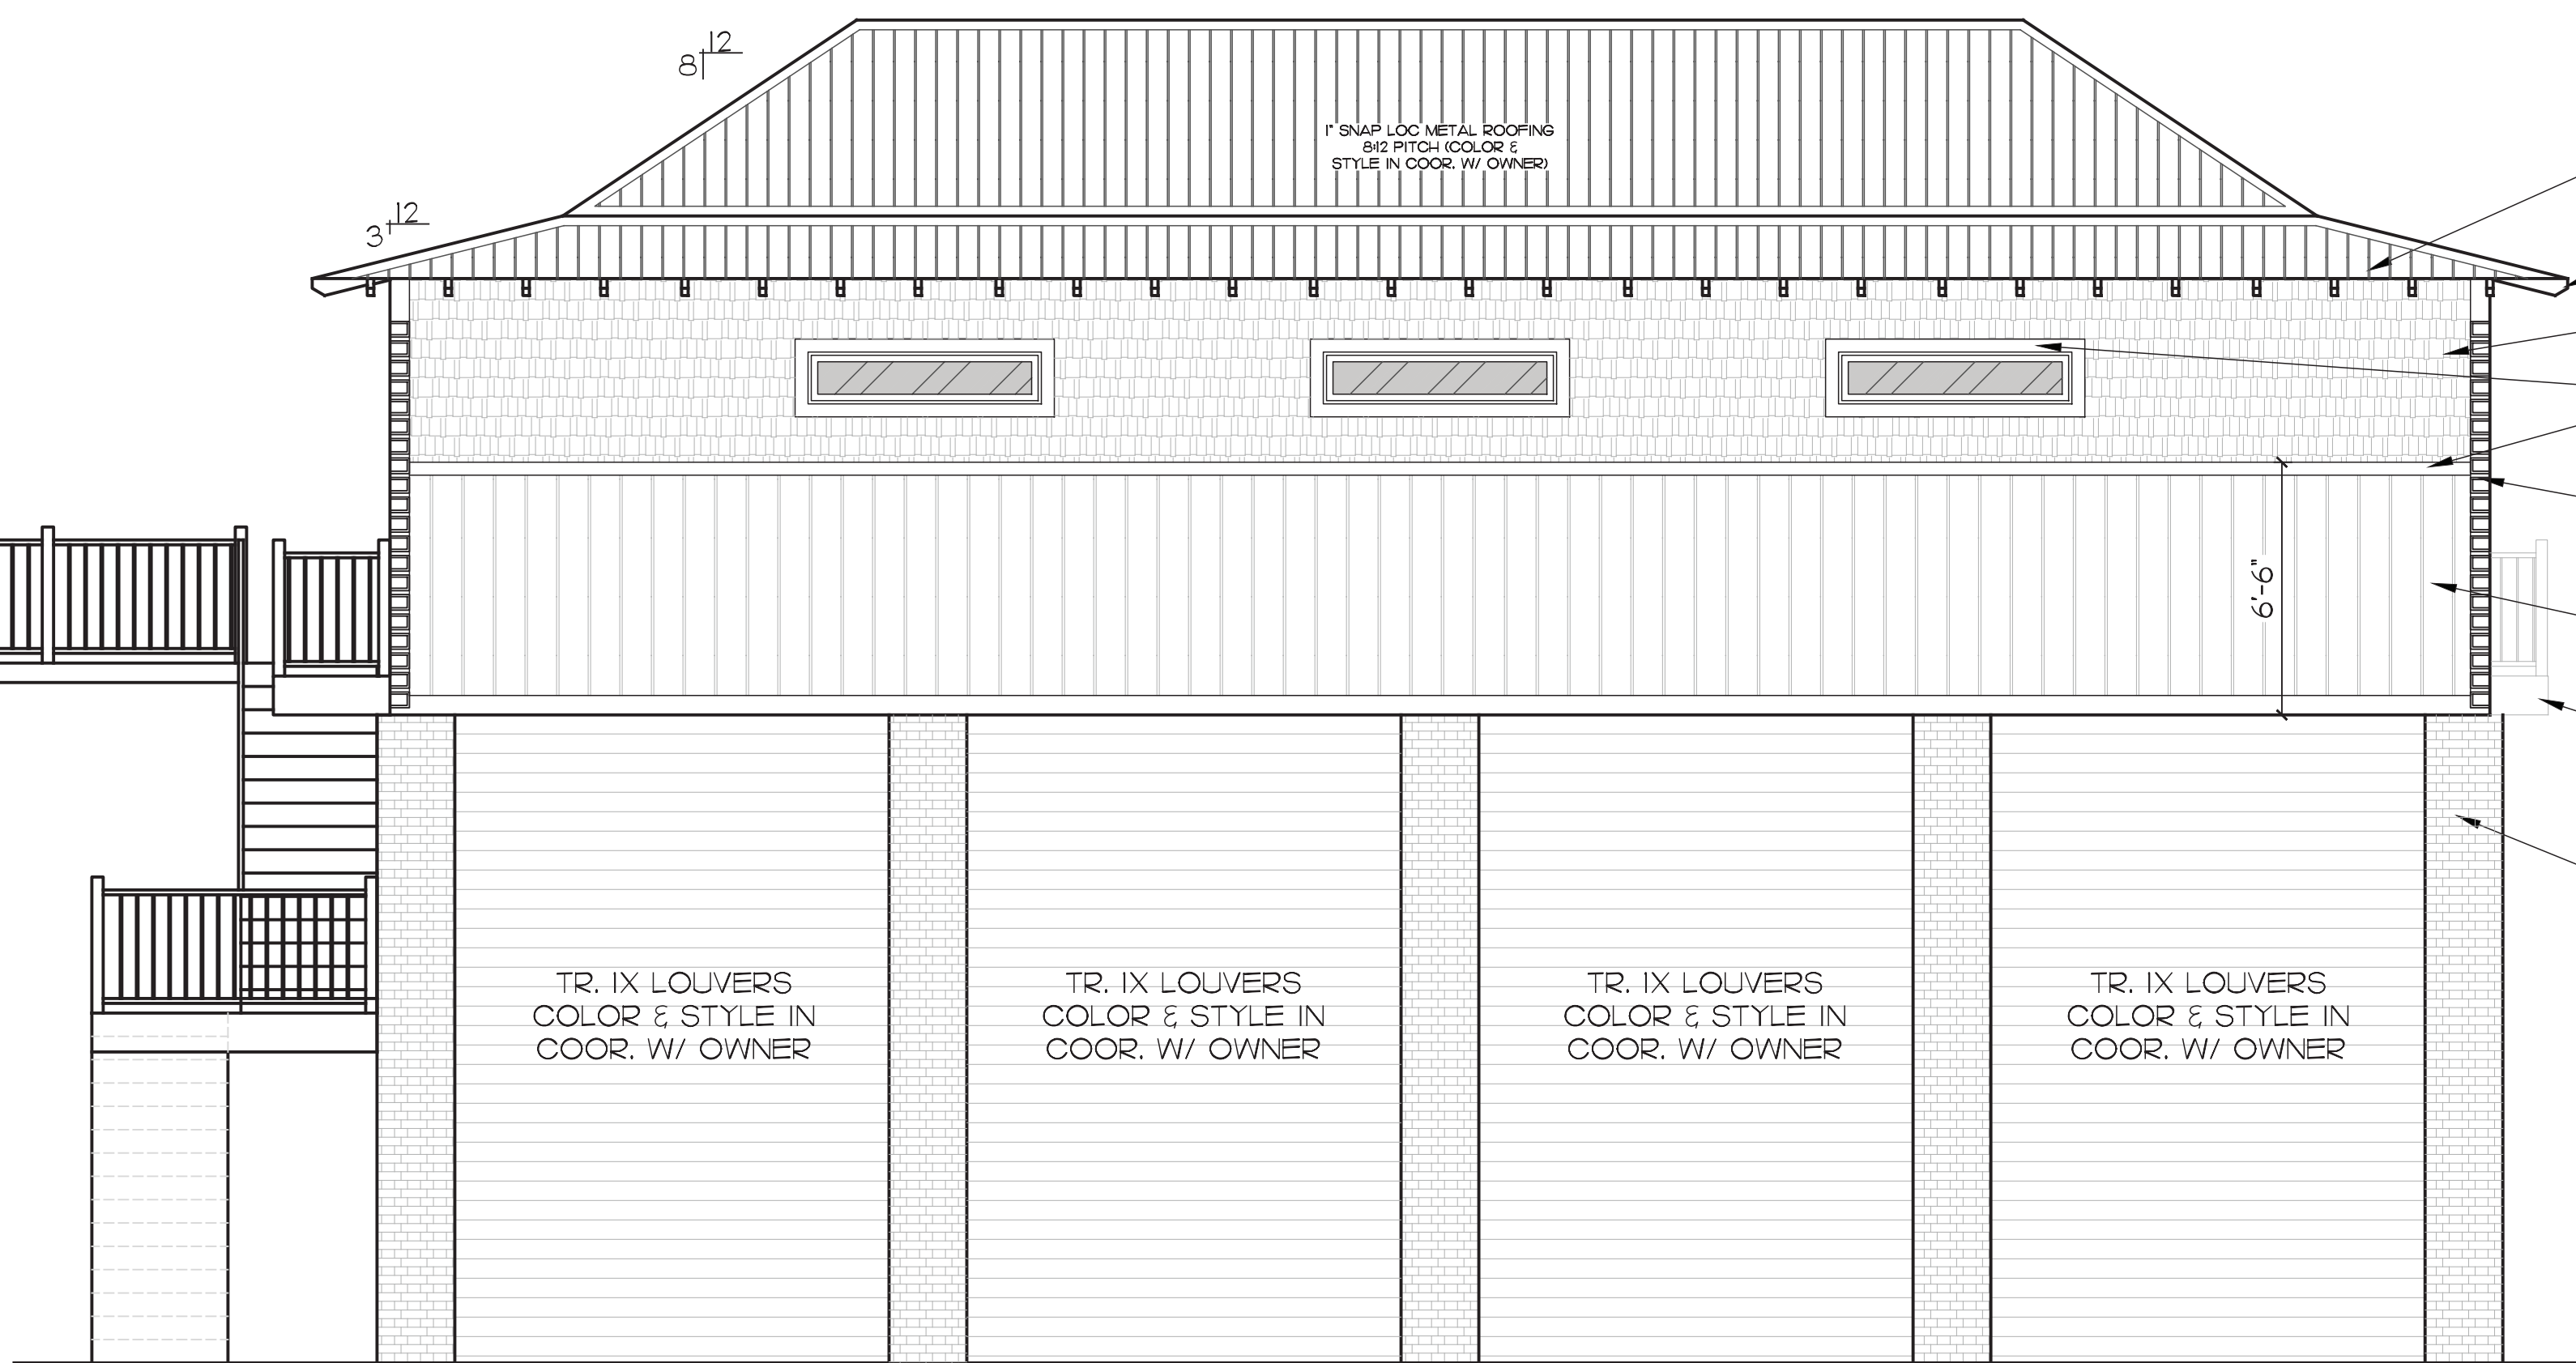

1" SNAP LOC METAL ROOFING
 3/12 PITCH (COLOR &
 STYLE BY OWNER)
 EXPOSED RAFTER TAILS
 COMPOSITE SHAKE SIDING
 4" HARDI TRIM
 6" HARDI TRIM W/
 6" CORNER BLOCKING
 HARDI BOARD & BATT.
 SIDING
 PRE-FABRICATED JULIET
 BALCONIES BEYOND
 BRICK WRAPPED
 16" COLUMNS
 COLOR & STYLE
 BY OWNER

2 BONUS BUILDING SOUTH ELEVATION
 SCALE: 1/4"=1'-0"

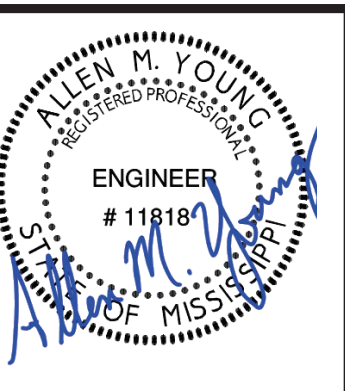

SHEET TITLE

DATE:	03/20/2023
REVISION DATE:	
DRAWN BY:	COLTLER SMITH
CHECK BY:	DON PARKER

SHEET


B3

ELECTRICAL SYMBOLS



○	SURFACE MOUNT LIGHT		CONDENSING UNIT		DISCONNECT SWITCH (FUSE SIZE SHOWN)
○	WALL MOUNTED FIX.	●	GARBAGE DISPOSAL		
○	RECESSED LIGHT	▼	PHONE		
○	VENT. LIGHT	Ⓜ	(RG-6 COAX CABLE) CABLE TV - 60" HT.		
○	OPTIONAL PENDANT LIGHTING	■	GARAGE DOOR OPENER		
○	CHANDELIER	Ⓜ	ELECTRIC WATER HEATER		
•	OPTIONAL UNDER COUNTER LIGHTING	A/C	AIR HANDLING UNIT		
	GROUND FAULT CIRCUIT INTERRUPT WATER PROOF OUTLET W/ EXT. VINYL TRIM KIT	○	HEAT DETECTOR DAISY CHAINED TO SMOKE DETECTORS IN HOUSE		
	110 POWER OUTLET		2X4 FLUORESCENT FIXTURE		
	DEDICATED 20 AMP 120V POWER OUTLET		CEILING FAN/LT (SURFACE MOUNTED EXCEPT IN VAULTED CEILING AREAS)		
	GROUND FAULT CIRCUIT INTERRUPT OUTLET	▶	PANELBOARD, FLUSH MOUNTED		
	220 POWER OUTLET	▶	UTILITY METER, AS REQUIRED		
3	3 WAY SWITCH	▶	SATELLITE TV		
\$	SWITCH	▶	HOSE BIBB		
	GARAGE DOOR SWITCH	▶	TRANSFER SWITCH		
	BATTERY BACKUP				
	SMOKE DETECTOR				
	OPTIONAL EXTERIOR FLOOD LIGHT COORD. SWITCH LOCATION W/ OWNER				
	NATURAL GAS METER				
	ALARM SYSTEM				
	CEILING MOUNTED 110 POWER OUTLET				

NOTE: THIS PLAN IS A GENERAL GUIDE TO LAYOUT THE ELECTRICAL DEVICES. COORDINATE ACTUAL SIZES AND LOCATIONS WITH OWNER

NOTE: COORDINATE W/ OWNER ON:
 - NETWORK OUTLETS
 - ROUTER & MODEM LOCATIONS
 - SECURITY DEVICES
 - CABLE OUTLETS
 - PHONE OUTLETS

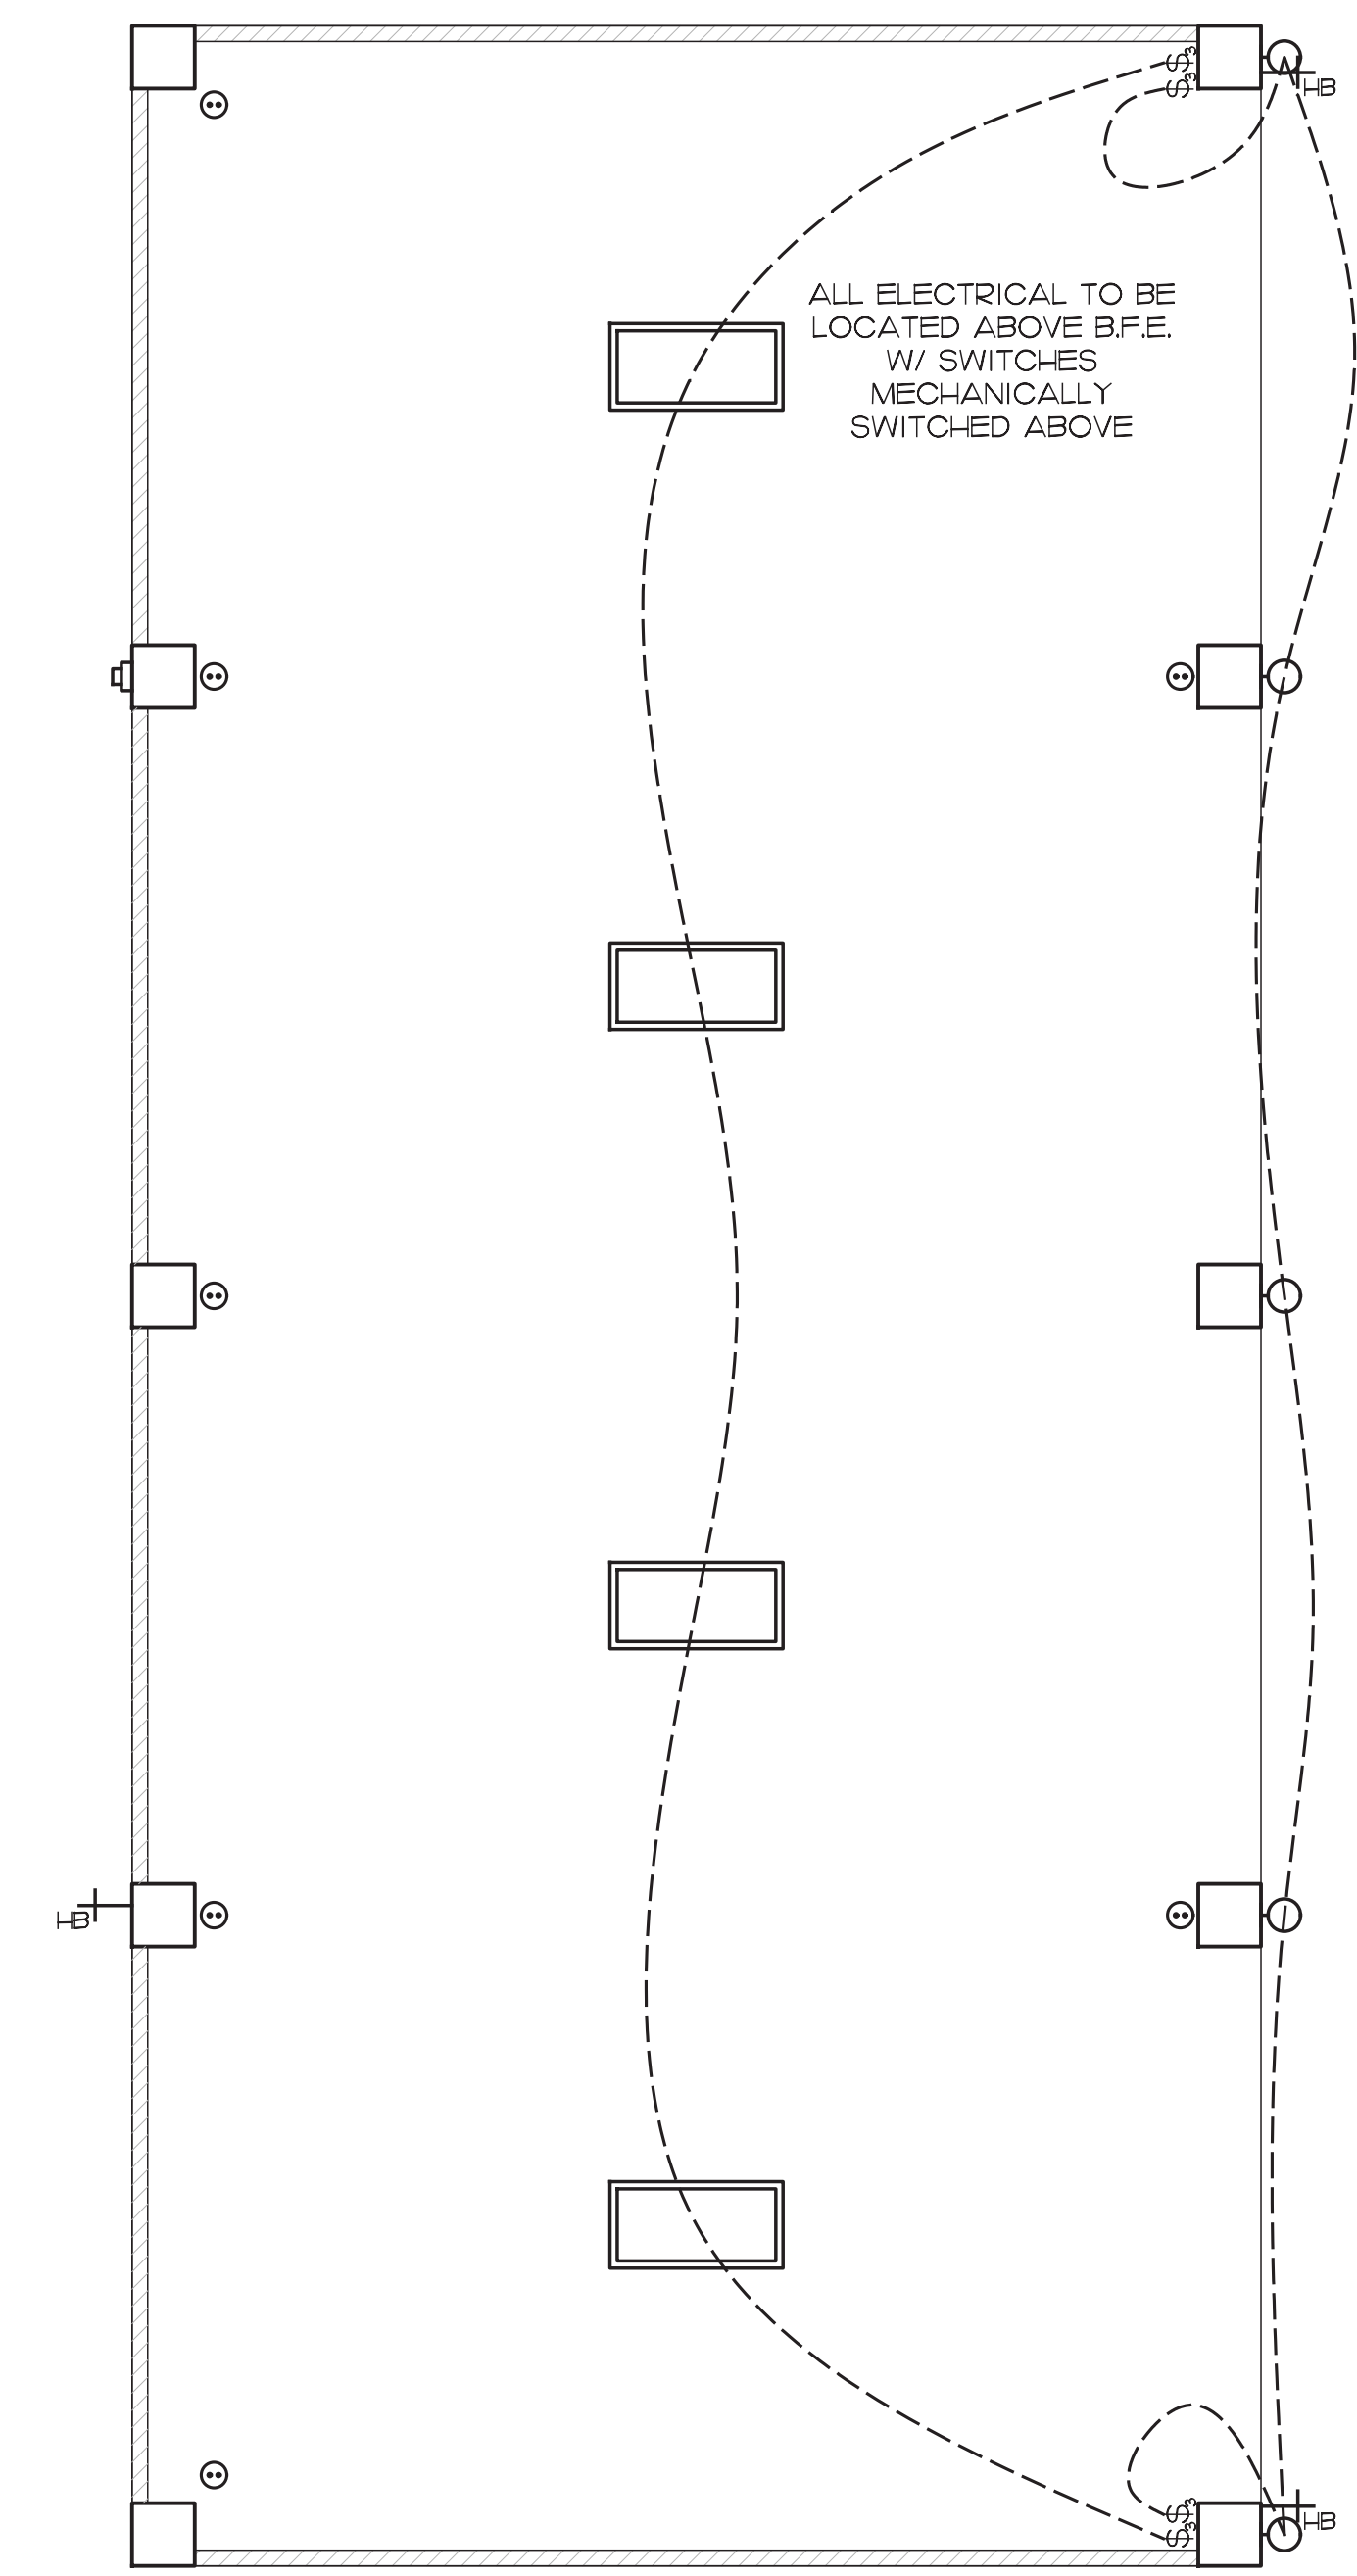

1 BONUS BUILDING GROUND FLOOR ELECTRICAL
 SCALE: 1/4"=1'-0"

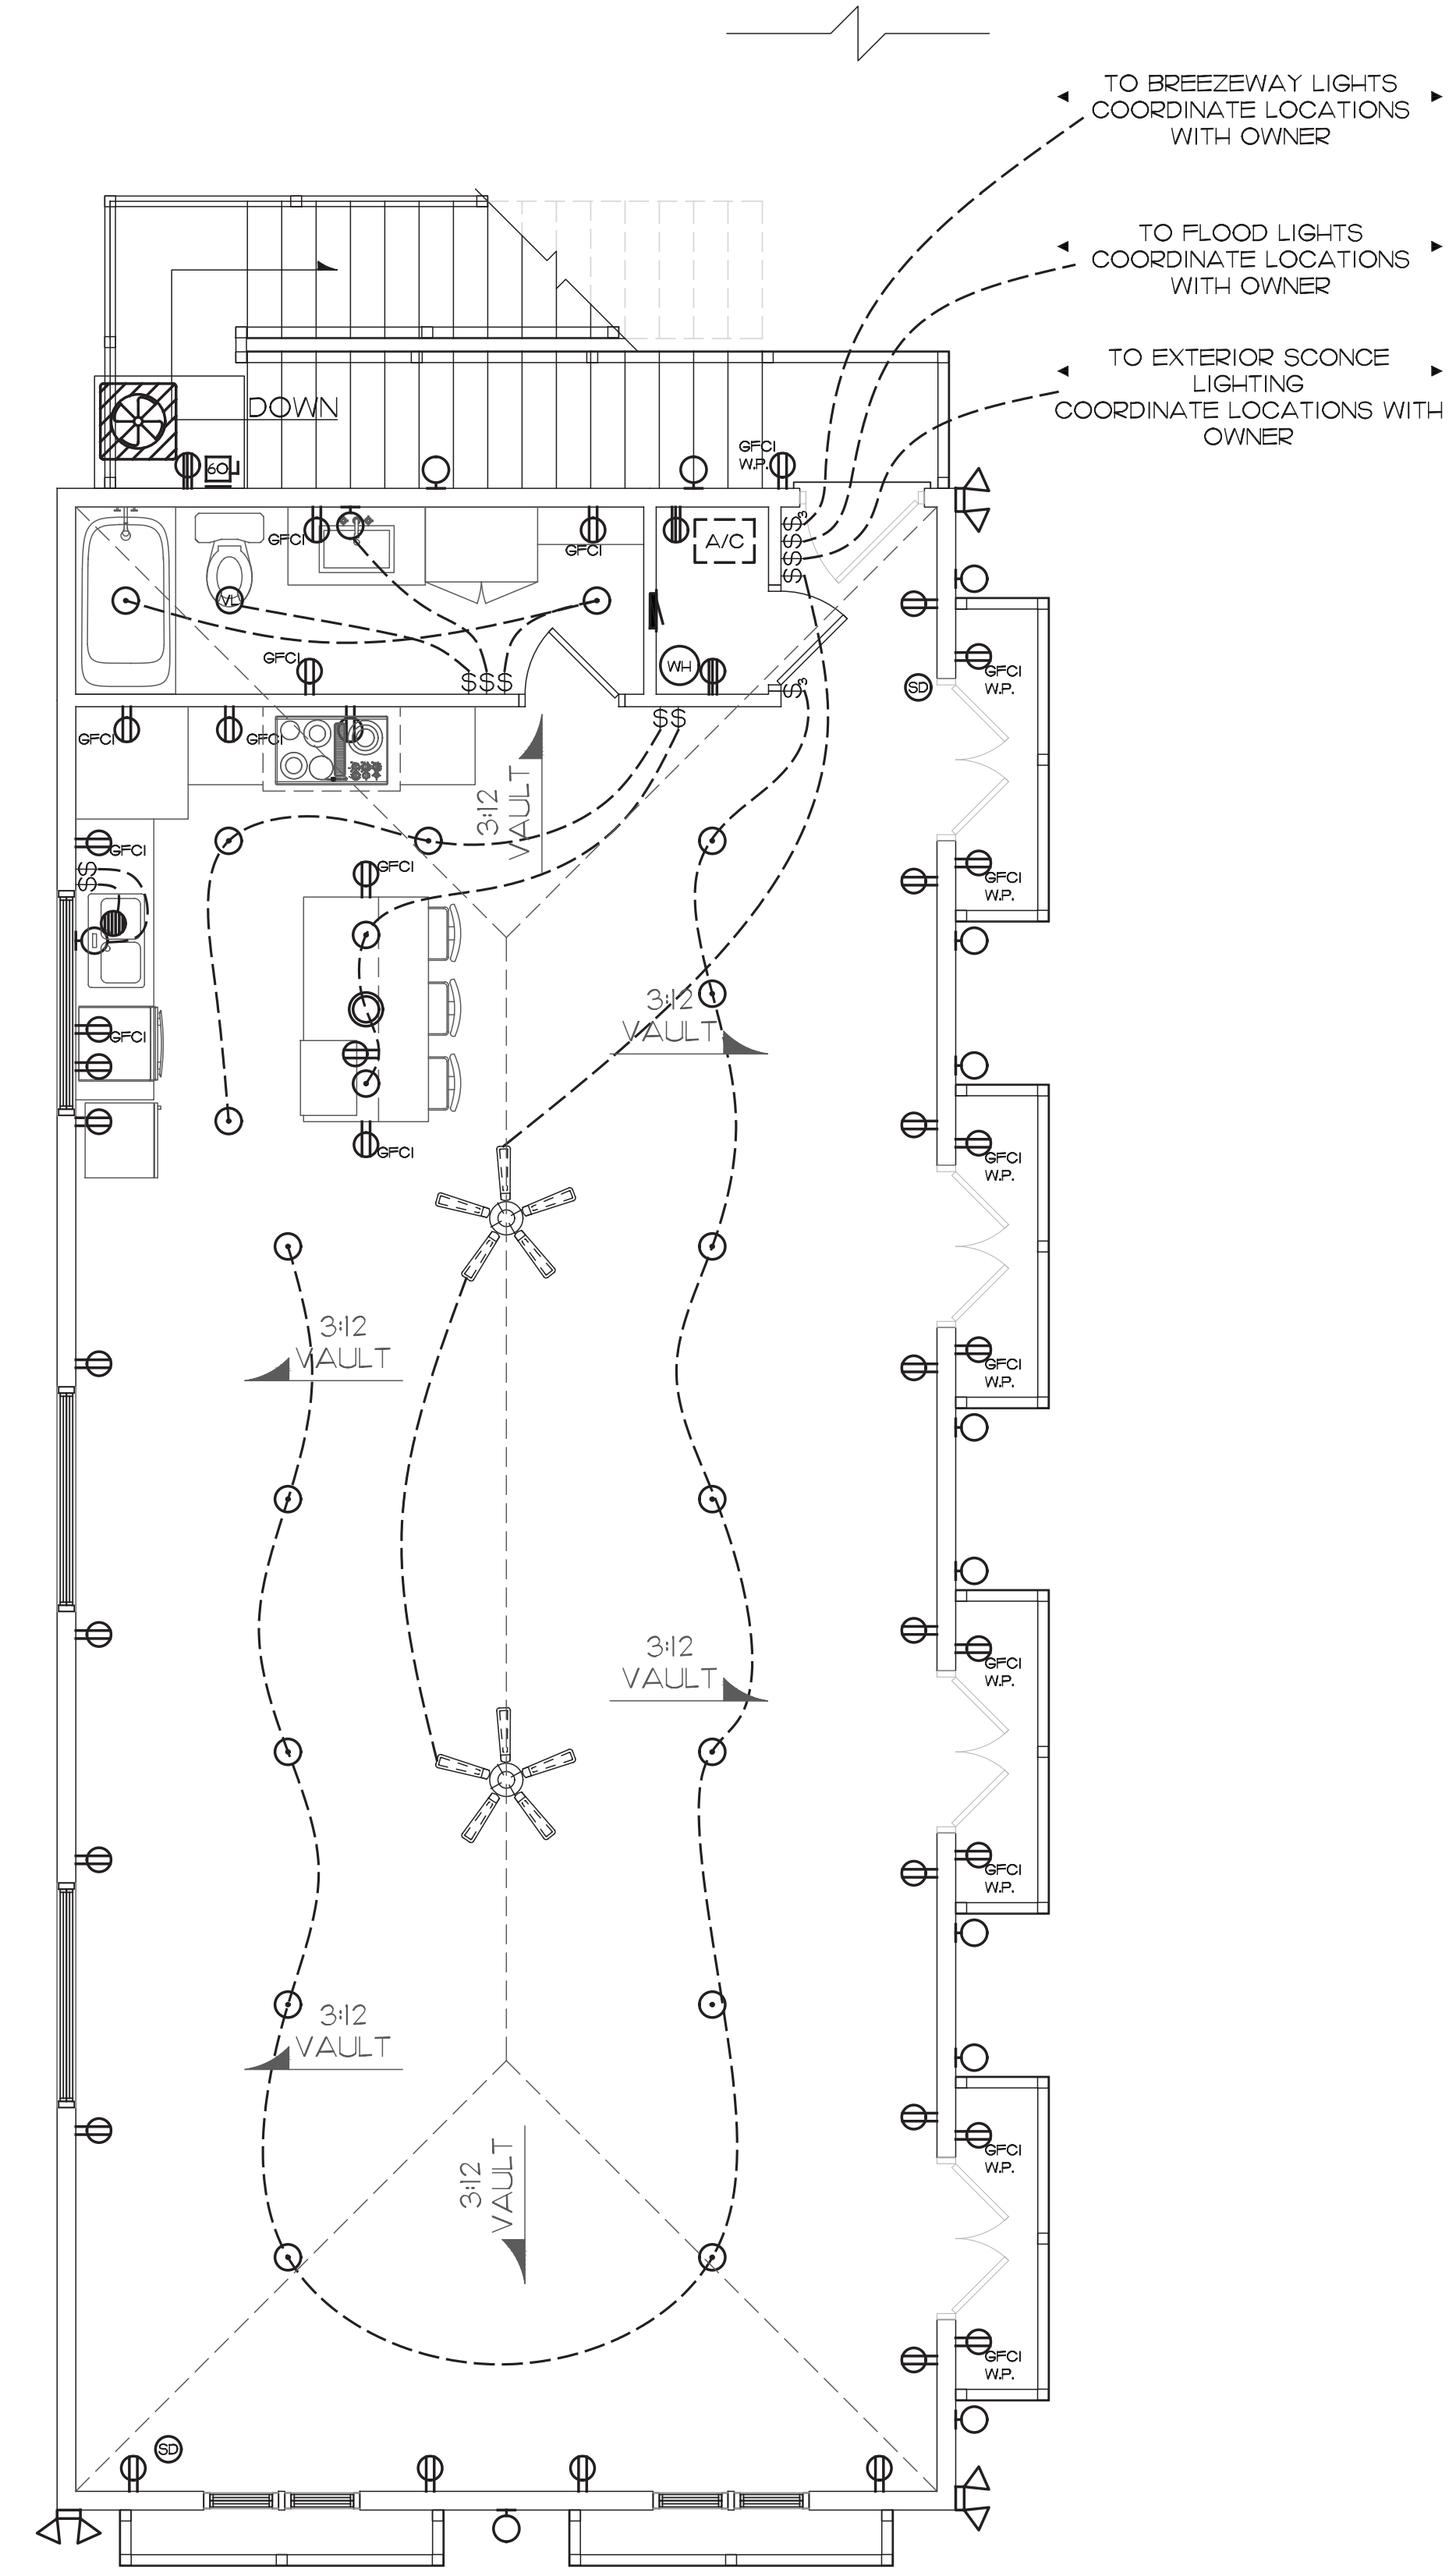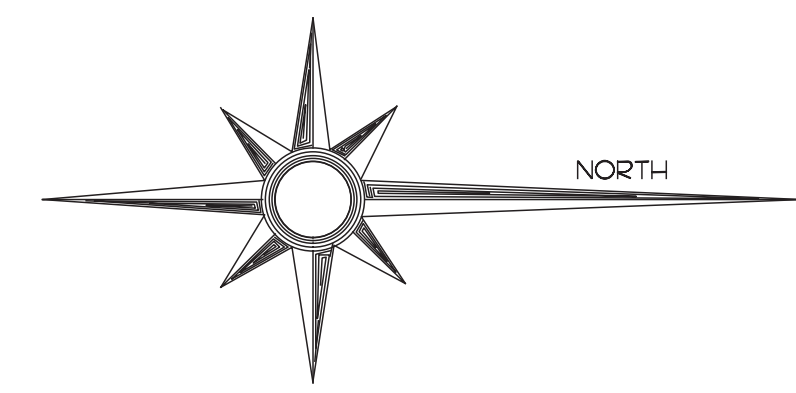

2 BONUS BUILDING MAIN FLOOR ELECTRICAL
 SCALE: 1/4"=1'-0"

PDM
PARKER DESIGN & MANAGEMENT
 DESIGN/STRUCTURAL CONSULTING, INC.
 8195C WOOLMARKET ROAD
 BILOXI MS, 39532
 P.O. BOX 228
 BILOXI MS, 39532

A NEW RESIDENCE FOR:
 TIM AND DEBRA NORTON
 419 SANDY HOOK DRIVE
 PASS CHRISTIAN, MS 39571

BONUS BUILDING
 ELECTRICAL PLAN

SHEET TITLE

DATE:	03/20/2023
REVISION DATE:	
DRAWN BY:	COLLIER SMITH
CHECK BY:	DON PARKER

SHEET