

Ordering Information

| | | |
|---|--|-------------|
| Applicable product: | | |
| Left outlet | K-1685 | shown |
| Right outlet | K-1686 | not shown |
| Accessories/hardware: | | |
| Focal bath door or Forum™ bath door or Helios™ bath door or Helios™ bath screen | K-701025 or K-703012 or K-704010 or K-704012 | recommended |

Product Information

| Fixture*: | basin area | top area | weight |
|--------------|--------------|--------------|--------|
| Bathing well | 1143 x 559mm | 1346 x 635mm | 68 Kg. |
| | water depth | capacity | |
| To overflow | 305mm | 189 litres | |


* Approximate measurements for comparison only.

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Fixture not drilled for supply fittings.

Shimming may be required to level fixture.

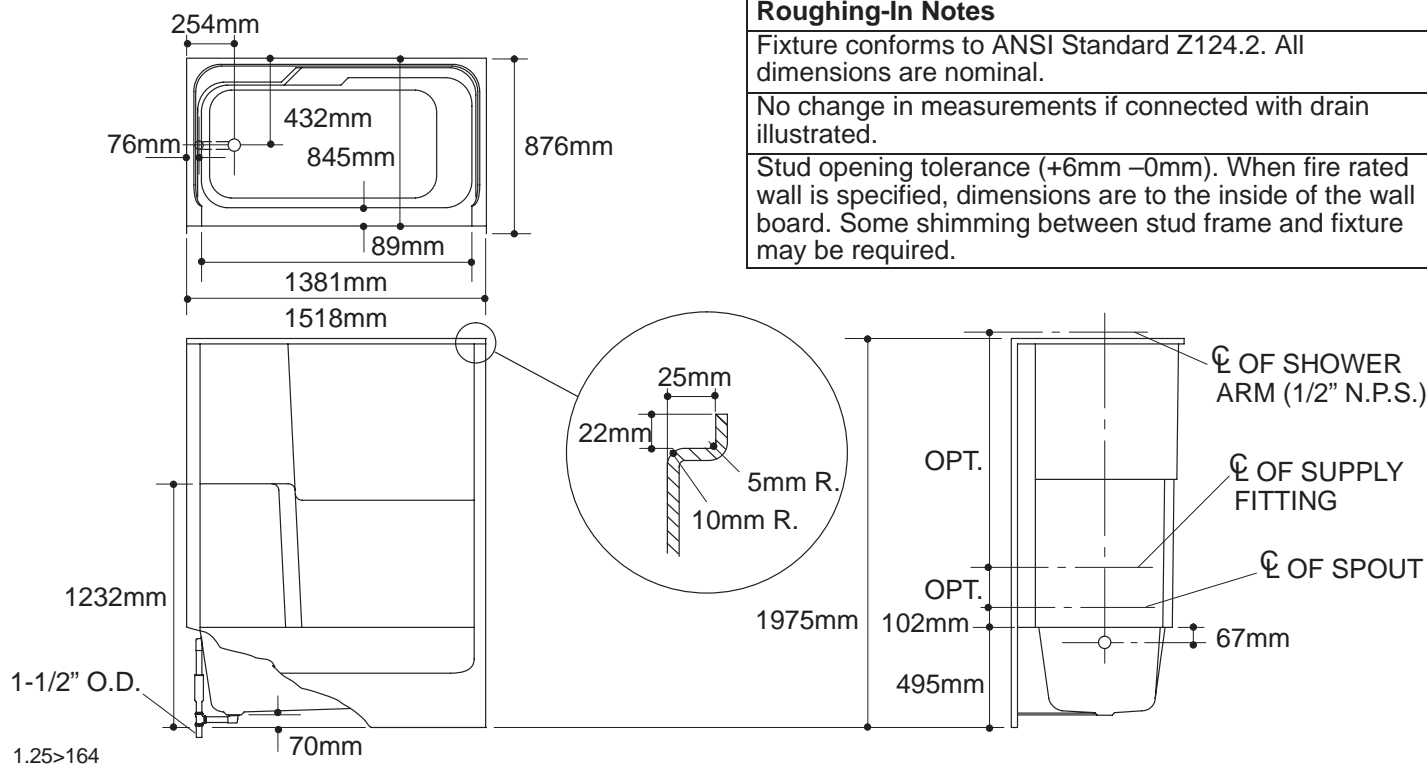

Roughing-In Notes

Fixture conforms to ANSI Standard Z124.2. All dimensions are nominal.

No change in measurements if connected with drain illustrated.

Stud opening tolerance (+6mm -0mm). When fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between stud frame and fixture may be required.