


## FEATURES

- 1-1/2" rear spud
- Vitreous china
- Elongated bowl
- Blow-out
- Wall-mount
- 3.5 gpf
- Integral seat
- ADA compliant when installed at required height of 17"-19" from floor to top of seat

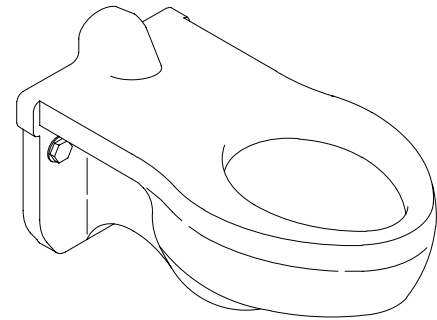

## CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ADA
- ASME/ANSI A112.19.2M
- ASME/ANSI A112.19.6M
- CABO/ANSI A117.1
- Energy Policy Act of 1992 (EPACT)
- IAPMO/UPC
- State of Massachusetts

## COLORS/FINISHES

- 0 White

## SPECIFIED MODEL:


Model	Description	Colors/Finishes
K-4475-C	Elongated bowl toilet	<input type="checkbox"/> 0 White

## PRODUCT SPECIFICATION:

The elongated wall-mount blow-out bowl shall have 1-1/2" rear spud. Bowl shall be made of vitreous china. Bowl shall be 3.5 gpf. Bowl shall have integral seat. Bowl shall be ADA compliant when installed at required height of 17"-19" from floor to top of seat. Bowl shall be Kohler Model K-4475-C-\_\_\_\_\_.

## PRODUCT INFORMATION

ADA compliant.	
Fixture:	
Configuration	Rear spud with integral seat, elongated
Gallons per flush	3.5 gallons*
Spud size	1-1/2"
Passageway	2-5/8"
Water depth from rim	5-3/8"
Minimum running pressure required	25 p.s.i.
* Designed to flush with 3.5 gallons of water when installed with a 3.5 gpf valve.	
Included Components:	
Spud	18357
Flush valve requirements: Refer to manufacturer and local codes.	

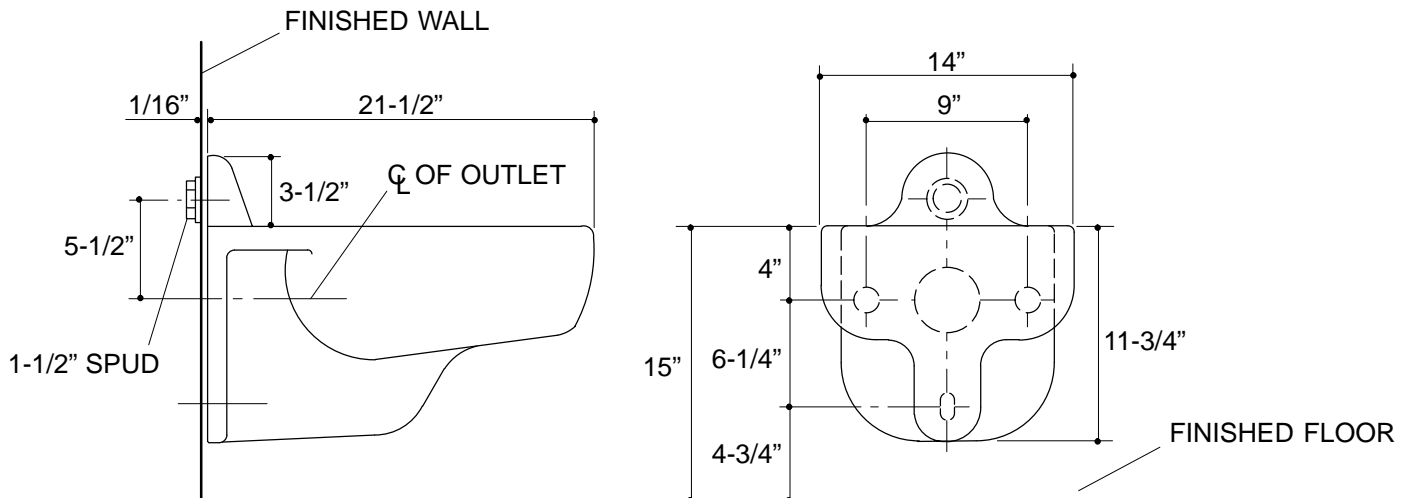

1.25>116

## PRODUCT DIAGRAM