



### FEATURES

- Brass construction
- Variety of handle style options

## BATH AND SHOWER FAUCET TRIM K-T130

ALSO K-T132, K-T134, K-304



### CODES/STANDARDS APPLICABLE




Specified model meets or exceeds the following:

- ASME/ANSI A112.18.1M
- ASSE/ANSI 1016
- CSA B125
- IAPMO/UPC

### COLORS/FINISHES

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes

**SPECIFIED MODEL:** For complete faucet, both faucet trim and Rite-Temp valve must be specified.





Model	Description			ADA	
<b>Bath and Shower:</b>					
K-T130-3D	With Six-Prong Handle	<input type="checkbox"/> CP <input type="checkbox"/> PB			
K-T130-4D	With Lever Handle		<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____		
K-T130-9B	With Oval Handle				<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____
<b>Shower Only:</b>					
K-T132-3D	With Six-Prong Handle	<input type="checkbox"/> CP <input type="checkbox"/> PB			
K-T132-4D	With Lever Handle		<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____		
K-T132-9B	With Oval Handle				<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____
<b>Valve Only:</b>					
K-T134-3D	With Six-Prong Handle	<input type="checkbox"/> CP <input type="checkbox"/> PB			
K-T134-4D	With Lever Handle		<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____		

Required and Optional Accessories on Page 2.


### PRODUCT SPECIFICATION:

Rite-Temp pressure-balancing single-control bath and shower faucet trim shall be of brass construction. Bath and shower trim shall include showerhead with arm and flange, 4-7/8" diverter spout with N.P.T. connection, and handle. Shower only trim shall include showerhead with arm and flange, and handle. Valve only trim shall include handle. Faucet trim shall be K-T\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_ and ceramic dial faceplate shall be Kohler Model K-146-\_\_\_\_\_. Rite-Temp valve shall be K-304-K\_\_\_\_\_-NA.

# ANTIQUETM

Required Accessories					
K-304-K	Rite-Temp Valve Without Stops	<input type="checkbox"/> NA			
K-304-KS	Rite-Temp Valve With Stops		<input type="checkbox"/> NA		
K-146	Ceramic Dial Faceplate (For -3D and -4D)			<input type="checkbox"/> Other _____	
K-262	Ceramic Dial Faceplate and Oval Handle Inset (For-9B)				<input type="checkbox"/> Other _____

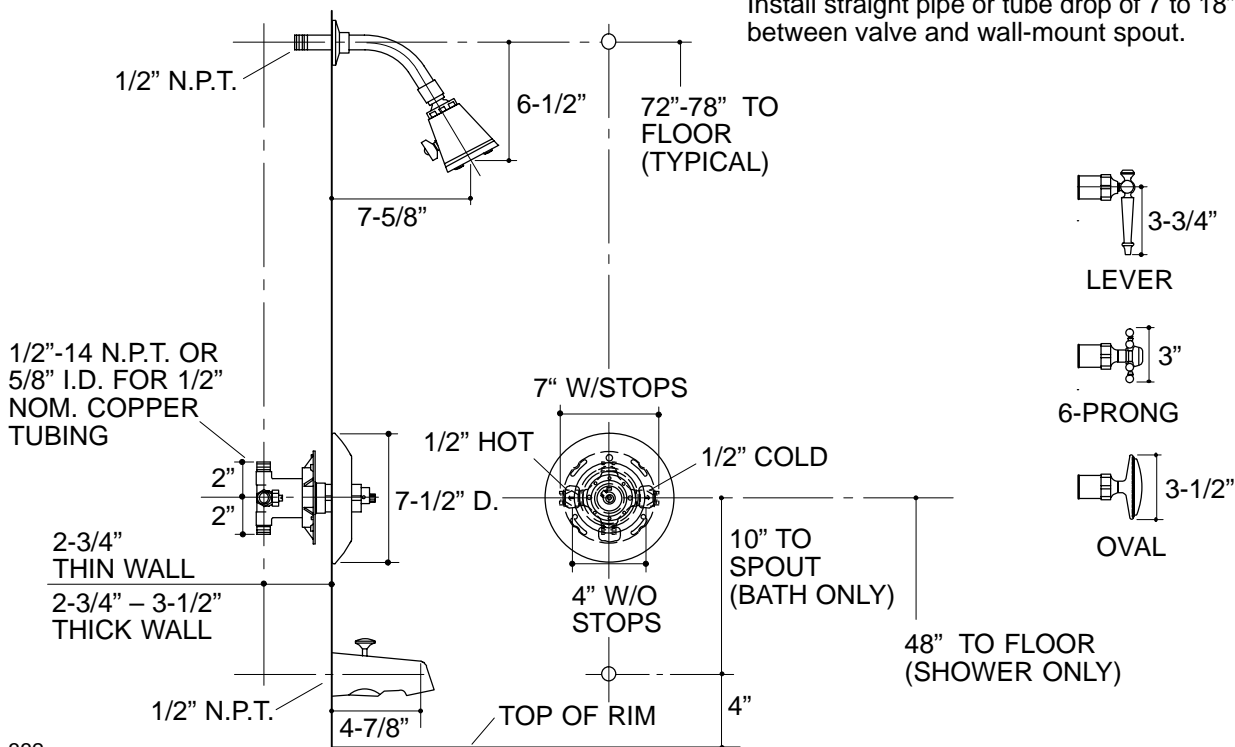
Optional Accessories		
K-9639	Large Lever Insert, Single	<input type="checkbox"/> CP <input type="checkbox"/> PB
K-9659	Large Lever Insert, Single	<input type="checkbox"/> Other _____

## INSTALLATION NOTES

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7 to 18" with single elbow between valve and wall-mount spout.



332

## PRODUCT DIAGRAM