KOHLER®
Roughing-In

K-1563-H, K-1564-H
SONATA®
ACRYLIC BATH WHIRLPOOL

Ordering Information

Applicable product		
Left outlet	K-1563-H	shown
Right outlet	K-1564-H	not shown
Accessories/hardware:		
Jet trim kit	K-9694	required
Drain	K-7161-AF	recommended

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V., 20 A, 60 Hz

Product Information

Fixture*:	basin area	top area	weight
Bathing well	1194 x 533mm	1397 x 610mm	113 Kg.
	water depth	capacity	
To overflow	318mm	201 litres	
* Approximate measurements for comparison only.			

Pump:	high HP	low HP	V	Hz	A
2-speed	1	1/8	120	60	16.5

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Unit is not drilled for supply fittings.

Pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 610mm of the pump.

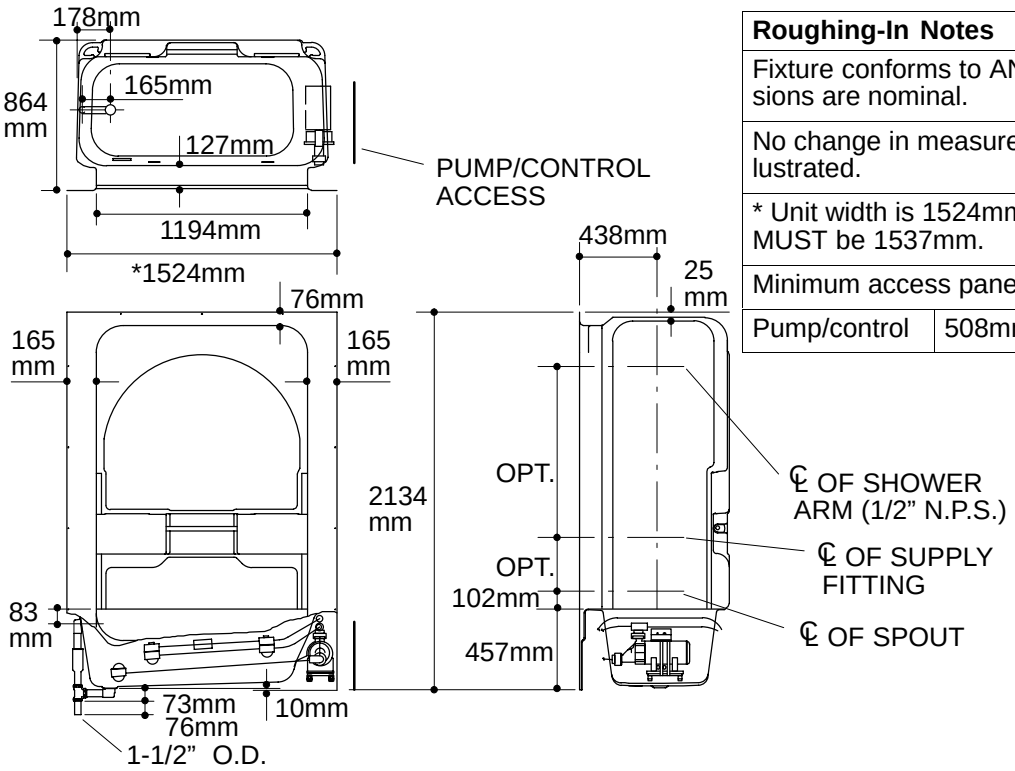

Roughing-In Notes		
Fixture conforms to ANSI Standard Z124.2. All dimensions are nominal.		
No change in measurements if connected with drain illustrated.		
* Unit width is 1524mm, roughing-in for stud frame MUST be 1537mm.		
Minimum access panel:		
Pump/control	508mm W x 381mm H panel	required

.75<132