SPECIFIC HVAC NOTES	
1	CONTRACTOR SHALL EXTEND SUPPLY AIR TRUNK DUCT MINIMUM 24" BEYOND LAST BRANCH DUCT TAKEOFF.
2	INLINE FAN MOUNTED ABOVE CEILING. SEE DETAIL FOR CLARITY.
4	PROVIDE AND INSTALL MANUFACTURER'S RECOMMENDED SIZE AND CONFIGURATION REFRIGERANT PIPING ROUTED CONCEALED BETWEEN INDOOR EVAPORATOR COIL AND MATCHING CONDENSING UNIT.
5	TYPICAL CONDENSING UNIT MOUNTED ON CONCRETE PAD. MAINTAIN MANUFACTURER RECOMMENDED CLEARANCES.
6	TYPICAL DUCTWORK ROUTED UP/DOWN TO FLOOR ABOVE/BELOW. SIZE AS INDICATED ON PLANS. PROVIDE BOX OUTS IN FLOOR SLABS OF ADEQUATE SIZE TO ACCOMODATE DUCTWORK INSULATION REQUIREMENTS. COORDINATE LOCATIONS WITH GENERAL CONTRACTOR.
7	OUTSIDE AIR DUCT ROUTED UP THROUGH ROOF TO INTAKE HOOD. SEE SCHEDULE AND DETAIL FOR MORE INFORMATION.
8	EXHAUST AIR DUCT ROUTED UP THROUGH ROOF TO RELIEF CAP. SEE SCHEDULE AND DETAIL FOR MORE INFORMATION.
9	TYPICAL OUTSIDE AIR INTAKE DUCT ROUTED FROM ROOF INTAKE HOOD TO HVAC EQUIPMENT AS INDICATED.
11	DUCTED DEHUMIDIFIER MOUNTED HIGH IN SPACE. SEE DETAIL FOR CLARITY.
12	ROLL DUCTWORK UP/DOWN UTILIZING MAXIMUM 45 DEGREE ELBOWS AS REQUIRED TO AVOID CONFLICT.
13	TYPICAL WALL MOUNTED DUCTLESS HEAT PUMP UNIT MOUNTED HIGH ON WALL OVER DOOR. SEE DETAIL FOR CLARITY.
14	TYPICAL FURNACE/EVAPORATOR. SEE DETAIL.
15	PROVIDE TWO-POSITION MOTORIZED DAMPER WITH 24V. ACTUATOR. INTERLOCK DAMPER ACTUATOR TO OPEN UPON ENERGIZATION OF BLOWER MOTOR.

WIER BOERNER ALLIN
ARCHITECTURE

2727 OLD CANTON RD, SUITE 200
JACKSON, MISSISSIPPI 39216

P:601.321.9107 F:601.321.9108

FOUNTAINS DOCTOR'S OFFICE

9.29.17

FOUNTAINS BLVD.
MADISON, MS 39110

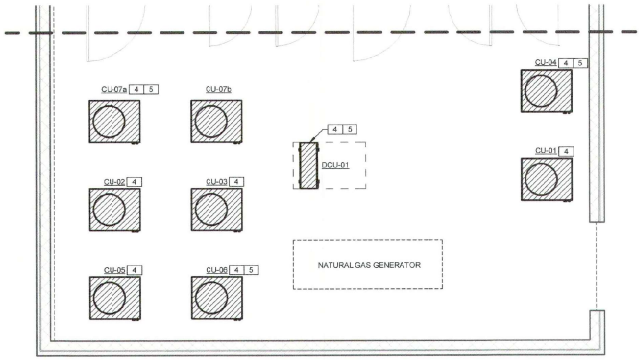

2 / M1.1 OUTDOOR MECHANICAL ENCLOSURE PLAN

1/4" = 1'-0"

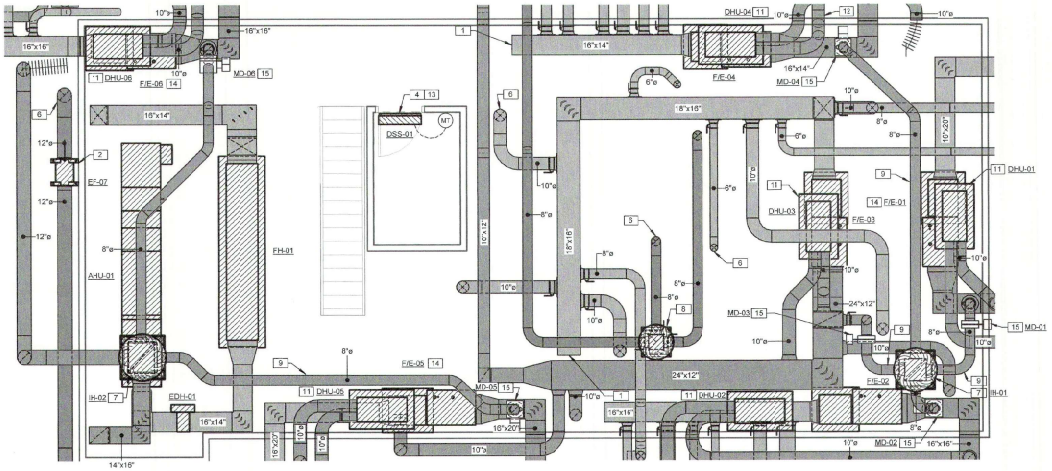

1 / M1.1 MEZZANINE LEVEL HVAC PLAN

1/4" = 1'-0"

SEPTEMBER 29, 2017

CONSTRUCTION DOCUMENTS

WBA #: 2217

REVISIONS

NO.	DESCRIPTION	DATE

GSK
MECHANICAL
201 PARK COURT - SUITE A
RIDGELAND, MS 39157
PHONE: 601-605-2930
FAX: 1-844-493-3111
www.gskmech.com

GSK#: 116-002

M1.1

MEZZANINE LEVEL HVAC PLAN