

Ordering Information

Applicable product:		
Left outlet, integral flange	K-1209-L	shown
Right outlet, integral flange	K-1209-R	not shown
Drop-in rim style	K-1209	not shown
Accessories/hardware:		
Jet trim kit	K-9694	included
Drain	K-7161-AF	recommended
Apron	K-1278	optional

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120V., 15A., 60 Hz


Product Information

Fixture*:	basin area	top area	weight	
Bathing well	1194 x 508mm	1346 x 584mm	45 Kg.	
	water depth	capacity		
To overflow	368mm	242 litres		
* Approximate measurements for comparison only.				
Pump:	HP	V	Hz	A
1-speed	3/4	120	60	10.5

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Each pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 610 of the pump.

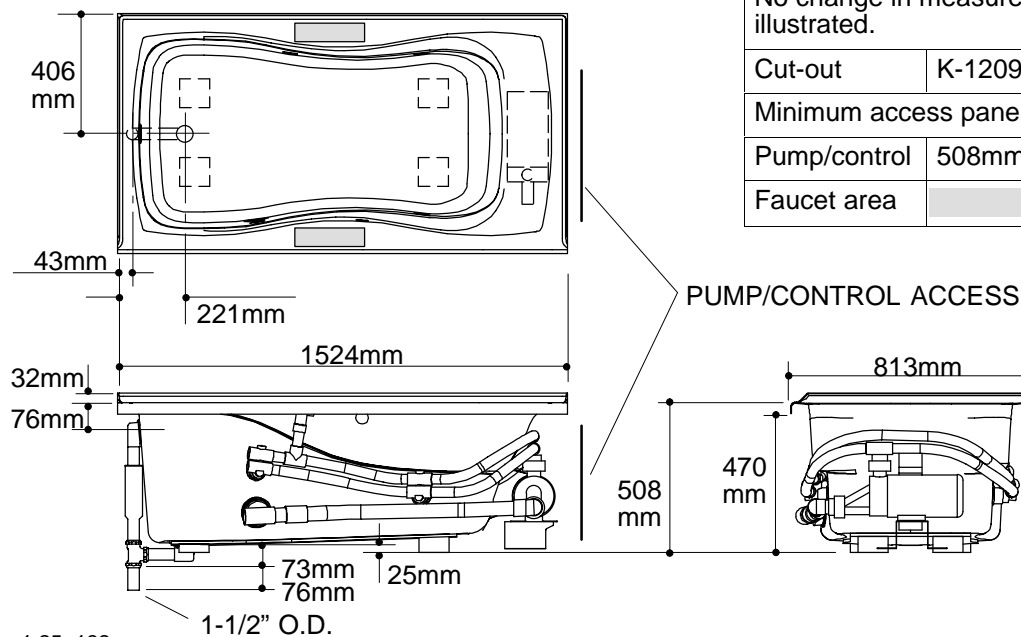

Roughing-In Notes


Fixture conforms to ANSI Standard Z124.1. All dimensions are nominal.

No change in measurements if connected with drain illustrated.


Cut-out K-1209 drop-in style, 1473 x 762mm

Minimum access panel (if apron is not used):

Pump/control	508mm W x 381mm H	required
Faucet area		recommended



**INTEGRAL
FLANGE
DETAIL**



**DROP-IN
RIM
DETAIL**

1.25>132