

Ordering Information

| | | |
|---|----------------------|--------------|
| Applicable product: | | |
| Seat on left | K-12109 | shown |
| Seat on right | K-12110 | not shown |
| Accessories/hardware: | | |
| Drain | K-9132 | recommended |
| Mastershower™ Handshower | K-9500 | recommended* |
| Revival™ valve trim | K-T16117-4A | recommended |
| Rite-Temp™ valve | K-304-K | recommended |
| Dome light | K-1570 | optional |
| Helios™ shower door OR Forum™ shower door | K-704014 K-703030 | optional |
| * Dimensions illustrated | | |

Product Information

| | |
|---------------|---------|
| Fixture: | 82 Kg. |
| Configuration | 1-piece |
| Drain Outlet | Ø86mm |

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

For increased accessibility, utilize "pit" installation as detailed in instructions.

For optimum accessibility, specify faucets and fittings to install and operate within the control area shown.

Fixture not drilled for supply fittings.

Shimming may be required to level fixture.

Roughing-In Notes

Fixture conforms to ANSI Standard Z124.2. All dimensions are nominal.


*Recess opening must be 1321 x 2134mm.

No change in measurements if connected with drain illustrated.

Stud opening tolerance (+ 6mm – 0mm). When fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between stud frame and fixture may be required.

Provide clear floor space per ANSI A117.1, and as shown.

| | |
|--|--|
| | Represents control area for faucets. |
| | Represents 610mm wall mount side bar. |
| | Represents clear floor space for 914 x 1092mm side entrance. |
| | Represents clear floor space for 1219 x 1092mm front entrance. |

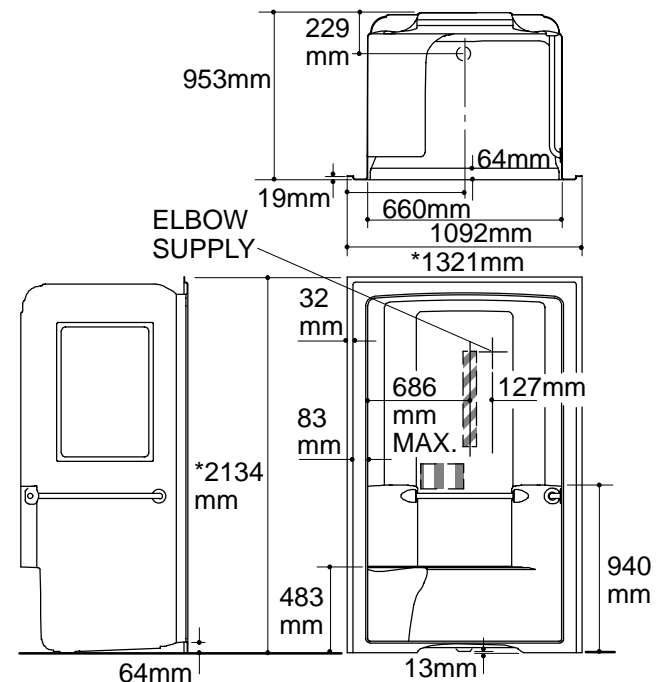

.75<132