



Specifications:

- Polarity sensitive input.
- 12/24VDC operation.
- Double form "C" contact rated 2 amp, 115VAC/28VDC contacts.
- Current Draw 15 mA.
- Snap track mountable (order part # ST1).


Board dimensions (approximate): 2.625"L x 1.625"W x .875"H




Dry Contacts




Polarity Reversal

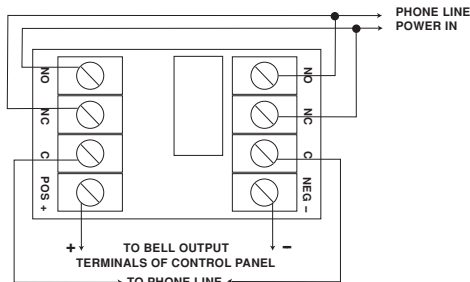

Latching Dry Contacts

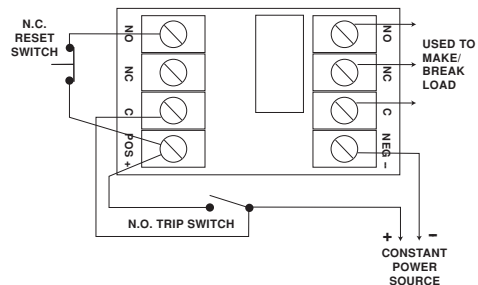

Line Seizure

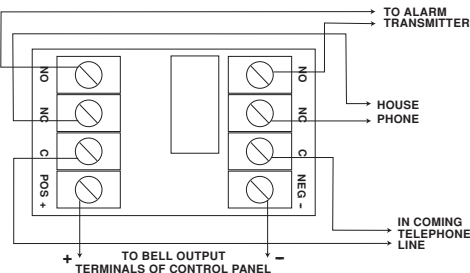

Altronix is not responsible for any typographical errors.