




PROPOSED

- B1** Remove and dispose of existing lettersets.
Patch and Paint from previous signage.
Install Qty (1) ONE NEW White channel letters with logo on front.
Letters raceway mount.
- C1** Provide and Install New Wave vinyl.
Per code: 25% of OA windows.
- C2** Provide and Install New Wave vinyl.
Per code: 25% of OA windows.
- C3** Provide and Install New Wave vinyl.
Per code: 25% of OA windows.
- C4** Provide and Install New Door Vinyl.
- C5** Provide and Install New Wave vinyl.
Per code: 25% of OA windows.
- C6** Provide and Install New Wave vinyl.
Per code: 25% of OA windows.

*This sign is designed to withstand 130 MPH wind load.
*This sign will contain a UL label.
*This sign is to be installed using 3/8" thru-bolts or appropriately sized hardware as necessary.
*Channel letters are to be attached to raceway using typical non-corrosive screw in anchors.


BUILDING BRANDING | CHANNEL LETTER SET | WHITE DAY LETTERS

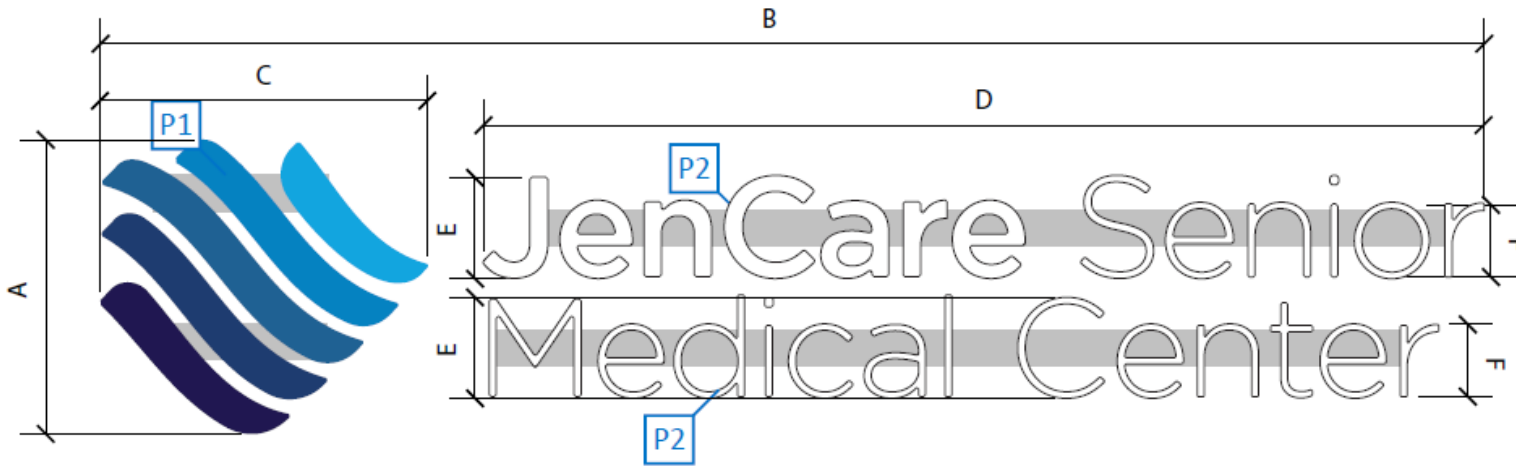

	Overall Height A	Overall Width B	Icon Width C	Copy Width D	Upper Case "C" E	Lower case "r" F	Minimum Stroke "t"	Square Footage Box Measured
5'H Horizontal	5'-0"	23'-6½"	5'-6¾"	17'-0¼"	1'-8¾"	1'-2¾"	1½"	117.71

Face-Lit Channel Letter Set Raceway Mounted

- P1 1st surface digitally printed 1/8" white acrylic with color to match ChenMed approved color menu.
- P2 1/8" white acrylic.
- F1 1" Trimcap attached to return w/#8 Metal screw every 12" Minimum. Black
- F2 .040 Aluminum returns. Painted Semi-Gloss Black.
- F3 .063 Aluminum Backer
- F4 12V Principle LED's Suitable for wet locations
- F5 Weather proof Pass thru for low voltage wire
- F6 Electrical Box
- F7 LED Premium Power Supply. IP68 Waterproof 120-277
- F8 Weep Holes
- F9 6" H X 2" Deep Raceway painted to match building fascia.

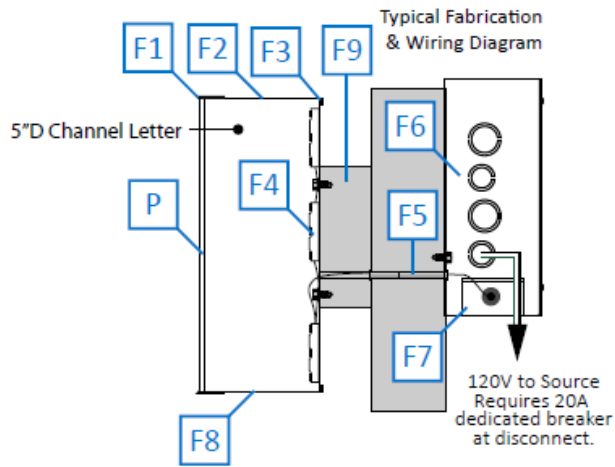

BLACK R0 G0 B0
PANTONE COATED 274 C PANTONE UNCOATED 274 U C 100 M 00 Y 13 K 8 R 11 G 22 B 61 #2746D
PANTONE COATED 654 C PANTONE UNCOATED 654 U C 100 M 4 Y 21 K 17 R0 G 55 B 112 #003A70
PANTONE COATED 647 C PANTONE UNCOATED 647 U C 90 M 3 V 30 K 4 R 12 G 36 B 46 #276290
PANTONE COATED 760 C PANTONE UNCOATED 760 U C 100 M 2 Y 4 K 0 R0 G 11 B 55 #0093C1
PANTONE COATED 296 C PANTONE UNCOATED 296 U C 80 M 1 Y 18 K 0 R0 G 52 B 25 #00A 8C

- *This sign is designed to withstand 130 MPH wind load.
- *This sign will contain a UL label.
- *This sign is to be installed using 3/8" thru-bolts or appropriately sized hardware as necessary.
- *Channel letters are to be attached to raceway using typical non-corrosive screw in anchors.