

# PERFORMANCE CURVE


| REPRIMING LIFTS |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|
| RPM             | 1650 | 1850 | 2050 | 2250 | 2450 | 2600 |
| FEET            | 25   | 25   | 25   | 24   | 25   | 25   |
| METERS          | 7,6  | 7,6  | 7,6  | 7,3  | 7,6  | 7,6  |

Figure NPSH required prior to using above table.  
DO NOT use as available Suction Lift.

VOLUTE 38224-614 CURVE V3A-B-1  
 IMPELLER 38615-103 MODEL V3A-B  
 SIZE 4"X3" IMP.DIA. 9.00"  
 SP.GR. 1.0 RPM NOTED

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

Note:  
Select performance within  
operating range of curve.

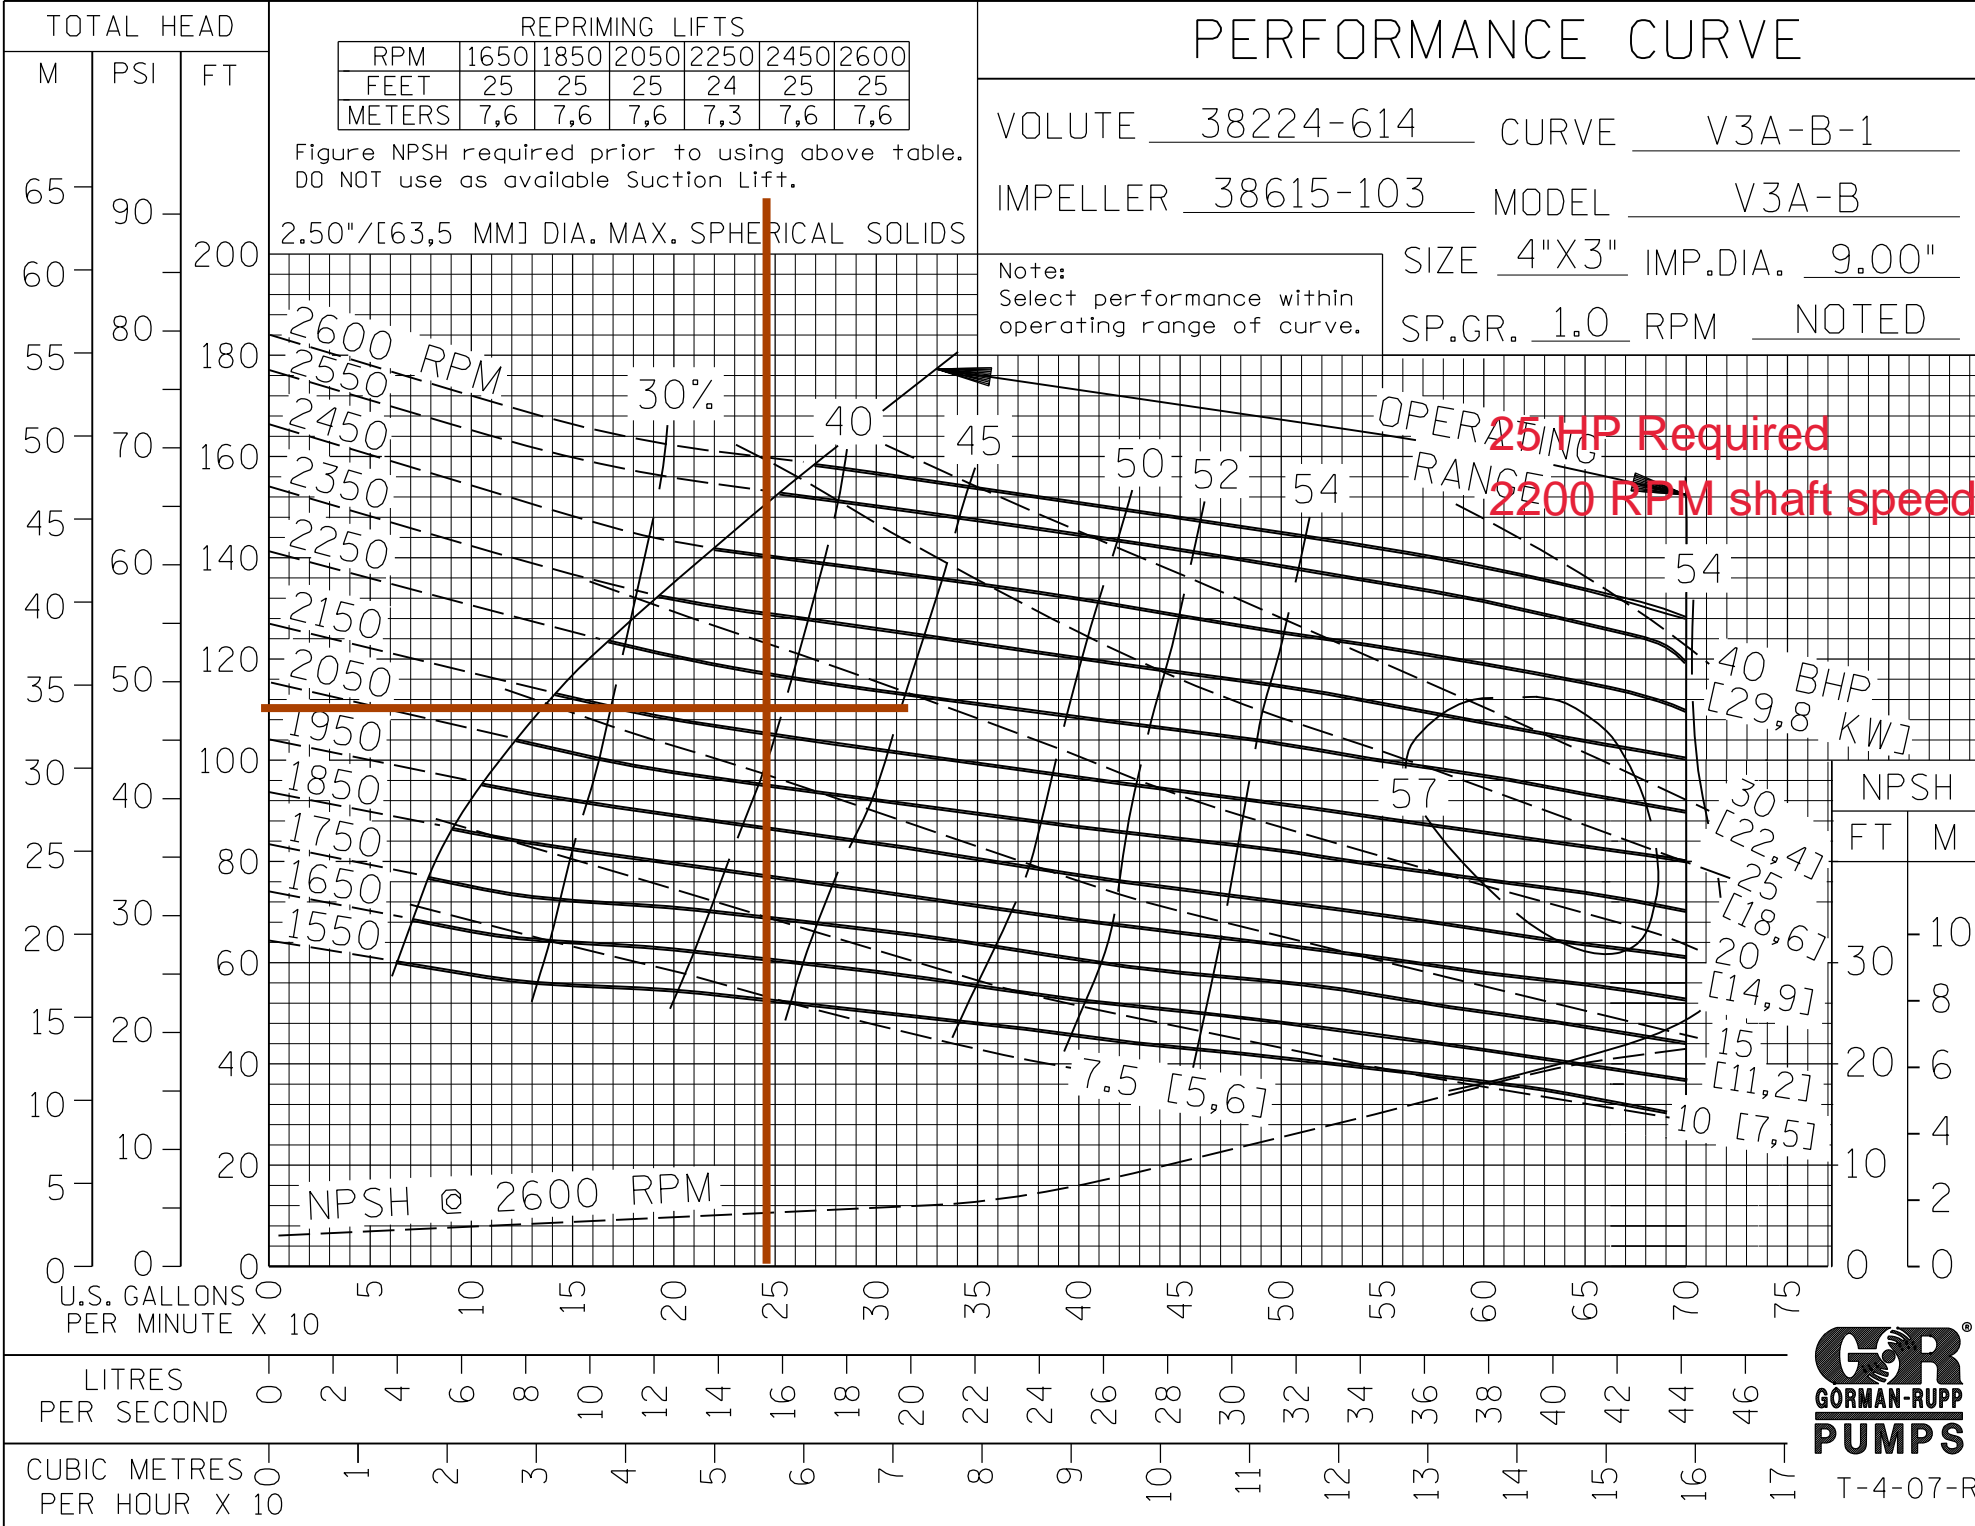

FILE NO. v3ab.s01



T-4-07-R